SAND2010-2185
Unlimited Release
December 2009
Updated January 21, 2011

DAKOTA, A Multilevel Parallel Object-Oriented Framework for Design Optimization, Parameter Estimation, Uncertainty Quantification, and Sensitivity Analysis

Version 5.1 Developers Manual

Brian M. Adams, Keith R. Dalbey, Michael S. Eldred, David M. Gay, Laura P. Swiler
Optimization and Uncertainty Quantification Department

William J. Bohnhoff
Radiation Transport Department

John P. Eddy
System Readiness and Sustainment Technologies Department

Karen Haskell
Scientific Applications and User Support Department

Sandia National Laboratories
P.O. Box 5800
Albuquerque, New Mexico 87185

Patricia D. Hough, Sophia Lefantzi
Quantitative Modeling and Analysis Department

Sandia National Laboratories
P.O. Box 969
Livermore, CA 94551

Abstract

The DAKOTA (Design Analysis Kit for Optimization and Terascale Applications) toolkit provides a flexible and extensible interface between simulation codes and iterative analysis methods. DAKOTA contains algorithms for optimization with gradient and nongradient-based methods; uncertainty quantification with sampling, reliability, and stochastic finite element methods; parameter estimation with nonlinear least squares methods; and sensitivity/variance analysis with design of experiments and parameter study methods. These capabilities may be used on their own or as components within advanced strategies such as surrogate-based optimization, mixed integer nonlinear programming, or optimization under uncertainty. By employing object-oriented design to implement abstractions of the key components required for iterative systems analyses, the DAKOTA toolkit provides a flexible and extensible problem-solving environment for design and performance analysis of computational models on high performance computers.

This report serves as a developers manual for the DAKOTA software and describes the DAKOTA class hierarchies and their interrelationships. It derives directly from annotation of the source code and provides detailed class documentation, including all member functions and attributes.

Contents

1 DAKOTA Developers Manual **7**

1.1 Introduction 7

1.2 Overview of DAKOTA 7

1.3 Services 12

1.4 Additional Resources 13

2 DAKOTA Namespace Index **15**

2.1 DAKOTA Namespace List 15

3 DAKOTA Hierarchical Index **17**

3.1 DAKOTA Class Hierarchy 17

4 DAKOTA Class Index **21**

4.1 DAKOTA Class List 21

5 DAKOTA File Index **25**

5.1 DAKOTA File List 25

6 DAKOTA Page Index **27**

6.1 DAKOTA Related Pages 27

7 DAKOTA Namespace Documentation **29**

7.1 Dakota Namespace Reference 29

7.2 SIM Namespace Reference 165

8 DAKOTA Class Documentation **167**

8.1 ActiveSet Class Reference 167

8.2 AnalysisCode Class Reference 170

8.3 Analyzer Class Reference . . . 175
8.4 ApplicationInterface Class Reference . . . 180
8.5 Approximation Class Reference . . . 191
8.6 ApproximationInterface Class Reference . . . 199
8.7 APPSEvalMgr Class Reference . . . 204
8.8 APPSOptimizer Class Reference . . . 207
8.9 BaseConstructor Struct Reference . . . 210
8.10 BiStream Class Reference . . . 211
8.11 BoStream Class Reference . . . 214
8.12 COLINApplication Class Reference . . . 217
8.13 COLINOptimizer Class Reference . . . 220
8.14 CollaborativeHybridStrategy Class Reference . . . 223
8.15 CommandLineHandler Class Reference . . . 225
8.16 CommandShell Class Reference . . . 227
8.17 ConcurrentStrategy Class Reference . . . 229
8.18 CONMINOptimizer Class Reference . . . 232
8.19 Constraints Class Reference . . . 240
8.20 CtelRegexp Class Reference . . . 252
8.21 DataFitSurrModel Class Reference . . . 255
8.22 DataInterface Class Reference . . . 265
8.23 DataMethod Class Reference . . . 267
8.24 DataMethodRep Class Reference . . . 269
8.25 DataModel Class Reference . . . 282
8.26 DataModelRep Class Reference . . . 284
8.27 DataResponses Class Reference . . . 288
8.28 DataResponsesRep Class Reference . . . 290
8.29 DataStrategy Class Reference . . . 294
8.30 DataStrategyRep Class Reference . . . 296
8.31 DataVariables Class Reference . . . 299
8.32 DataVariablesRep Class Reference . . . 302
8.33 DDACEDesignCompExp Class Reference . . . 312
8.34 DirectApplicInterface Class Reference . . . 316
8.35 DOTOptimizer Class Reference . . . 324
8.36 EffGlobalMinimizer Class Reference . . . 329

8.37 EmbeddedHybridStrategy Class Reference . . . 332
8.38 ErrorTable Struct Reference . . . 334
8.39 ForkAnalysisCode Class Reference . . . 335
8.40 ForkApplicInterface Class Reference . . . 337
8.41 FSUDesignCompExp Class Reference . . . 340
8.42 GaussProcApproximation Class Reference . . . 344
8.43 GetLongOpt Class Reference . . . 350
8.44 Graphics Class Reference . . . 354
8.45 GridApplicInterface Class Reference . . . 357
8.46 HierarchSurrModel Class Reference . . . 360
8.47 HybridStrategy Class Reference . . . 364
8.48 Interface Class Reference . . . 366
8.49 Iterator Class Reference . . . 376
8.50 JEGAOptimizer Class Reference . . . 388
8.51 JEGAOptimizer::Driver Class Reference . . . 396
8.52 JEGAOptimizer::Evaluator Class Reference . . . 398
8.53 JEGAOptimizer::EvaluatorCreator Class Reference . . . 404
8.54 LeastSq Class Reference . . . 406
8.55 MergedConstraints Class Reference . . . 410
8.56 MergedVariables Class Reference . . . 412
8.57 Minimizer Class Reference . . . 414
8.58 MixedConstraints Class Reference . . . 422
8.59 MixedVariables Class Reference . . . 424
8.60 Model Class Reference . . . 426
8.61 Model::FDhelp Struct Reference . . . 454
8.62 MPIPackBuffer Class Reference . . . 455
8.63 MPIUnpackBuffer Class Reference . . . 458
8.64 NCSUOptimizer Class Reference . . . 461
8.65 NestedModel Class Reference . . . 464
8.66 NIDRProblemDescDB Class Reference . . . 472
8.67 NL2Res Struct Reference . . . 477
8.68 NL2SOLLeastSq Class Reference . . . 478
8.69 NLPQLPOptimizer Class Reference . . . 481
8.70 NLSSOLLeastSq Class Reference . . . 486

8.71 NoDBBaseConstructor Struct Reference . . . 488
8.72 NonD Class Reference . . . 489
8.73 NonDAdaptImpSampling Class Reference . . . 497
8.74 NonDBayesCalibration Class Reference . . . 501
8.75 NonDCalibration Class Reference . . . 503
8.76 NonDCubature Class Reference . . . 504
8.77 NonDExpansion Class Reference . . . 507
8.78 NonDGlobalEvidence Class Reference . . . 512
8.79 NonDGlobalInterval Class Reference . . . 514
8.80 NonDGlobalReliability Class Reference . . . 518
8.81 NonDGlobalSingleInterval Class Reference . . . 521
8.82 NonDGPMSABayesCalibration Class Reference . . . 523
8.83 NonDIncremLHSSampling Class Reference . . . 526
8.84 NonDIntegration Class Reference . . . 528
8.85 NonDInterval Class Reference . . . 530
8.86 NonDLHSEvidence Class Reference . . . 533
8.87 NonDLHSInterval Class Reference . . . 535
8.88 NonDLHSSampling Class Reference . . . 537
8.89 NonDLHSSingleInterval Class Reference . . . 540
8.90 NonDLocalEvidence Class Reference . . . 542
8.91 NonDLocalInterval Class Reference . . . 544
8.92 NonDLocalReliability Class Reference . . . 547
8.93 NonDLocalSingleInterval Class Reference . . . 554
8.94 NonDPolynomialChaos Class Reference . . . 556
8.95 NonDQuadrature Class Reference . . . 558
8.96 NonDQUESOBayesCalibration Class Reference . . . 561
8.97 NonDReliability Class Reference . . . 563
8.98 NonDSampling Class Reference . . . 567
8.99 NonDSparseGrid Class Reference . . . 573
8.100 NonDStochCollocation Class Reference . . . 576
8.101 NPSOLOptimizer Class Reference . . . 577
8.102 Optimizer Class Reference . . . 581
8.103 ParallelConfiguration Class Reference . . . 586
8.104 ParallelDirectApplicInterface Class Reference . . . 588

8.105ParallelLevel Class Reference 589
8.106ParallelLibrary Class Reference 592
8.107ParamResponsePair Class Reference 605
8.108ParamStudy Class Reference 609
8.109partial_prp_equality Struct Reference 614
8.110partial_prp_hash Struct Reference 615
8.111PecosApproximation Class Reference 616
8.112ProblemDescDB Class Reference 622
8.113PStudyDACE Class Reference 632
8.114PSUADEDesignCompExp Class Reference 635
8.115RecastBaseConstructor Struct Reference 639
8.116RecastModel Class Reference 640
8.117Response Class Reference 647
8.118ResponseRep Class Reference 652
8.119RichExtrapVerification Class Reference 658
8.120SensAnalysisGlobal Class Reference 661
8.121SequentialHybridStrategy Class Reference 663
8.122SerialDirectApplicInterface Class Reference 667
8.123SharedVariablesData Class Reference 668
8.124SharedVariablesDataRep Class Reference 671
8.125SingleMethodStrategy Class Reference 674
8.126SingleModel Class Reference 676
8.127SNLLBase Class Reference 679
8.128SNLLLeastSq Class Reference 682
8.129SNLLOptimizer Class Reference 686
8.130SOLBase Class Reference 693
8.131Strategy Class Reference 696
8.132String Class Reference 703
8.133SurfpackApproximation Class Reference 706
8.134SurrBasedGlobalMinimizer Class Reference 710
8.135SurrBasedLocalMinimizer Class Reference 712
8.136SurrBasedMinimizer Class Reference 719
8.137SurrogateModel Class Reference 724
8.138SysCallAnalysisCode Class Reference 730

8.139 SysCallApplicInterface Class Reference . . . 732
8.140 TANA3Approximation Class Reference . . . 735
8.141 TaylorApproximation Class Reference . . . 737
8.142 TrackerHTTP Class Reference . . . 739
8.143 Variables Class Reference . . . 742
8.144 Verification Class Reference . . . 755

9 DAKOTA File Documentation 757

9.1 dll_api.C File Reference . . . 757
9.2 dll_api.h File Reference . . . 759
9.3 JEGAOptimizer.C File Reference . . . 761
9.4 JEGAOptimizer.H File Reference . . . 762
9.5 library_mode.C File Reference . . . 763
9.6 library_split.C File Reference . . . 765
9.7 main.C File Reference . . . 766
9.8 restart_util.C File Reference . . . 767

10 Recommended Practices for DAKOTA Development 769

10.1 Introduction . . . 769
10.2 Style Guidelines . . . 769
10.3 File Naming Conventions . . . 771
10.4 Class Documentation Conventions . . . 772

11 Instructions for Modifying DAKOTA's Input Specification 773

11.1 Modify dakota.input.nspec . . . 773
11.2 Rebuild generated files . . . 774
11.3 Update NIDRProblemDescDB.C in Dakota/src . . . 774
11.4 Update ProblemDescDB.C in Dakota/src . . . 776
11.5 Update Corresponding Data Classes . . . 777
11.6 Use get_<data_type>() Functions . . . 777
11.7 Update the Documentation . . . 778
11.8 Understanding Iterator Flow . . . 779

12 Interfacing with DAKOTA as a Library 781

12.1 Introduction . . . 781

12.2 Quick start: examples and test code . . . 782
12.3 Comparison to main.C . . . 782
12.4 Problem database population . . . 783
12.5 Instantiating the strategy . . . 786
12.6 Defining the direct application interface . . . 786
12.7 Additional updates . . . 788
12.8 Executing the strategy . . . 789
12.9 Retrieving data after a run . . . 789
12.10 Linking against the DAKOTA library . . . 789
12.11 Summary . . . 790

13 Performing Function Evaluations 791

13.1 Synchronous function evaluations . . . 791
13.2 Asynchronous function evaluations . . . 791
13.3 Analyses within each function evaluation . . . 792

14 Software Tools for DAKOTA Development 793

14.1 Introduction . . . 793
14.2 Subversion for Version Control . . . 793
14.3 GNU Autotools for Configuration Management . . . 794

Chapter 1

DAKOTA Developers Manual

Author:

Brian M. Adams, William J. Bohnhoff, Keith R. Dalbey, John P. Eddy, Michael S. Eldred, David M. Gay, Karen Haskell, Patricia D. Hough, Sophia Lefantzi, Laura P. Swiler

1.1 Introduction

The DAKOTA (Design Analysis Kit for Optimization and Terascale Applications) toolkit provides a flexible, extensible interface between analysis codes and iteration methods. DAKOTA contains algorithms for optimization with gradient and nongradient-based methods, uncertainty quantification with sampling, reliability, stochastic expansion, and interval estimation methods, parameter estimation with nonlinear least squares methods, and sensitivity/variance analysis with design of experiments and parameter study capabilities. (Solution verification and Bayesian approaches are also in development.) These capabilities may be used on their own or as components within advanced algorithms such as surrogate-based optimization, mixed integer nonlinear programming, mixed aleatory-epistemic uncertainty quantification, or optimization under uncertainty. By employing object-oriented design to implement abstractions of the key components required for iterative systems analyses, the DAKOTA toolkit provides a flexible problem-solving environment as well as a platform for rapid prototyping of new solution approaches.

The Developers Manual focuses on documentation of DAKOTA class structures; it derives directly from annotation of the source code. For information on input command syntax, refer to the `Reference Manual`, and for a tour of DAKOTA features and capabilities, refer to the Users Manual.

1.2 Overview of DAKOTA

In DAKOTA, the *strategy* creates and manages *iterators* and *models*. In the simplest case, the strategy creates a single iterator and a single model and executes the iterator on the model to perform a single study. In a more advanced case, a hybrid optimization strategy might manage a global optimizer operating on a low-fidelity model in coordination with a local optimizer operating on a high-fidelity model. And on the high end, a surrogate-based optimization under uncertainty strategy would employ an uncertainty quantification iterator nested within an optimization iterator and would employ truth models layered within surrogate models. Thus, iterators and

models provide both stand-alone capabilities as well as building blocks for more sophisticated studies.

A model contains a set of *variables*, an *interface*, and a set of *responses*, and the iterator operates on the model to map the variables into responses using the interface. Each of these components is a flexible abstraction with a variety of specializations for supporting different types of iterative studies. In a DAKOTA input file, the user specifies these components through strategy, method, model, variables, interface, and responses keyword specifications.

The use of class hierarchies provides a mechanism for extensibility in DAKOTA components. In each of the various class hierarchies, adding a new capability typically involves deriving a new class and providing a small number of virtual function redefinitions. These redefinitions define the coding portions specific to the new derived class, with the common portions already defined at the base class. Thus, with a small amount of new code, the existing facilities can be extended, reused, and leveraged for new purposes.

The software components are presented in the following sections using a top-down order.

1.2.1 Strategies

Class hierarchy: Strategy.

Strategies provide a control layer for creation and management of iterators and models. Specific strategies include:

- SingleMethodStrategy: the simplest strategy. A single iterator is run on a single model to perform a single study.
- HybridStrategy: hybrid minimization using a set of iterators employing a corresponding set of models of varying fidelity. Coordination approaches among the iterators include collaborative, embedded, and sequential approaches, as embodied in the CollaborativeHybridStrategy, EmbeddedHybridStrategy, and SequentialHybridStrategy derived classes.
- ConcurrentStrategy: two similar algorithms are available: (1) multi-start iteration from several different starting points, and (2) pareto set optimization for several different multiobjective weightings. Employs a single iterator with a single model, but runs multiple instances of the iterator concurrently for different settings within the model.

1.2.2 Iterators

Class hierarchy: Iterator. Iterator implementations may choose to split operations up into run time phases as described in Understanding Iterator Flow.

The iterator hierarchy contains a variety of iterative algorithms for optimization, uncertainty quantification, nonlinear least squares, design of experiments, and parameter studies. The hierarchy is divided into Minimizer and Analyzer branches. The Minimizer classes include:

- Optimization: Optimizer provides a base class for the DOTOptimizer, CONMINOptimizer, NPSOLOptimizer, NLPQLPOptimizer, and SNLLOptimizer gradient-based optimization libraries and the APPSOptimizer, COLINOptimizer, JEGAOptimizer, and NCSUOptimizer nongradient-based optimization methods and libraries.
- Parameter estimation: LeastSq provides a base class for NL2SOLLeastSq, a least-squares solver based on NL2SOL, SNLLLeastSq, a Gauss-Newton least-squares solver, and NLSSOLLeastSq, an SQP-based least-squares solver.

- Surrogate-based minimization (optimization and nonlinear least squares): SurrBasedMinimizer provides a base class for SurrBasedLocalMinimizer, SurrBasedGlobalMinimizer, and EffGlobalMinimizer. The surrogate-based local and global methods employ a single iterator with any of the available SurrogateModel capabilities (local, multipoint, or global data fits or hierarchical approximations) and perform a sequence of approximate optimizations, each involving build, optimize, and verify steps. The efficient global method, on the other hand, hard-wires a recursion involving Gaussian process surrogate models coupled with the DIRECT global optimizer to maximize an expected improvement function.

and the Analyzer classes include:

- Uncertainty quantification: NonD provides a base class for non-deterministic methods NonDSampling, NonDReliability (reliability analysis), NonDExpansion (stochastic expansion methods), NonDIntegration (numerical integration methods), and NonDInterval (interval-based epistemic methods). Bayesian calibration methods are prototyped in NonDBayesCalibration. At this point, we have an initial implementation of the LANL GPMSA code in NonDGPMSABayesianCalibration.
  - NonDSampling is further specialized with the NonDLHSSampling class for Latin hypercube and Monte Carlo sampling, the NonDIncremLHSSampling class for incremental Latin hypercube sampling, and NonDAdaptImpSampling for multimodal adaptive importance sampling.
  - NonDReliability is further specialized with local and global methods (NonDLocalReliability and NonDGlobalReliability).
  - NonDExpansion includes specializations for generalized polynomial chaos (NonDPolynomialChaos) and stochastic collocation (NonDStochCollocation) and is supported by NonDIntegration, which supplies cubature, tensor-product quadrature and Smolyak sparse grid methods (NonDCubature, NonDQuadrature, and NonDSparseGrid).
  - NonDInterval provides a base class for epistemic interval-based UQ methods. Three interval analysis approaches are provided: LHS (NonDLHSInterval), efficient global optimization (NonDGlobalInterval), and local optimization (NonDLocalInterval). Each of these three has specializations for single interval (NonDLHSSingleInterval, NonDGlobalSingleInterval, NonDLocalSingleInterval) and Dempster-Shafer Theory of Evidence (NonDLHSEvidence, NonDGlobalEvidence, NonDLocalEvidence) approaches.
- Parameter studies and design of experiments: PStudyDACE provides a base class for ParamStudy, which provides capabilities for directed parameter space interrogation, PSUADEDesignCompExp, which provides access to the Morris One-At-a-Time (MOAT) method for parameter screening, and DDACEDesignCompExp and FSUDesignCompExp, which provide for parameter space exploration through design and analysis of computer experiments. NonDLHSSampling from the uncertainty quantification branch also supports design of experiments for design and state variables when in `all_variables` mode.
- Solution verification studies: Verification provides a base class for the active RichExtrapVerification (verification via Richardson extrapolation) and other solution verification methods in development.

1.2.3 Models

Class hierarchy: Model.

The model classes are responsible for mapping variables into responses when an iterator makes a function evaluation request. There are several types of models, some supporting sub-iterators and sub-models for enabling layered and nested relationships. When sub-models are used, they may be of arbitrary type so that a variety of recursions are supported.

- SingleModel: variables are mapped into responses using a single Interface object. No sub-iterators or sub-models are used.
- SurrogateModel: variables are mapped into responses using an approximation. The approximation is built and/or corrected using data from a sub-model (the truth model) and the data may be obtained using a sub-iterator (a design of experiments iterator). SurrogateModel has two derived classes: DataFitSurrModel for data fit surrogates and HierarchSurrModel for hierarchical models of varying fidelity. The relationship of the sub-iterators and sub-models is considered to be "layered" since they are not used as part of every response evaluation on the top level model, but rather used periodically in surrogate update and verification steps.
- NestedModel: variables are mapped into responses using a combination of an optional Interface and a sub-iterator/sub-model pair. The relationship of the sub-iterators and sub-models is considered to be "nested" since they are used to perform a complete iterative study as part of every response evaluation on the top level model.
- RecastModel: recasts the inputs and outputs of a sub-model for the purposes of variable transformations (e.g., variable scaling, transformations to standardized random variables) and problem reformulation (e.g., multiobjective optimization, response scaling, augmented Lagrangian merit functions, expected improvement).

1.2.4 Variables

Class hierarchy: Variables.

The Variables class hierarchy manages design, aleatory uncertain, epistemic uncertain, and state *variable types* for continuous, discrete integer, and discrete real *domain types*. This hierarchy is specialized according to how the domain types are managed:

- MixedVariables: domain type distinctions are retained, such that separate continuous, discrete integer, and discrete real domain types are managed. This is the default Variable perspective, and draws its name from "mixed continuous-discrete" optimization.
- MergedVariables: domain types are combined through relaxation of discrete constraints; i.e., continuous and discrete variables are merged into continuous arrays through relaxation of integrality (for discrete integer ranges) or set membership (for discrete integer or discrete real sets) requirements. The branch and bound minimizer is the only method using this approach at present.

Whereas domain types are controlled through the derived class selection, variable types are handled within each of these derived classes using variable views. These views control the subset of variable types that are active and inactive within a particular iterative study. For design optimization and uncertainty quantification, for example, the active variables view consists of design or uncertain types, respectively, and any other variable types are carried along invisible to the iterative algorithm being employed. For parameter studies and design of experiments, however, a variable subset view is not imposed and all variables are active. Selected uncertainty quantification methods can also be toggled into an "All" view using the `all_variables` input specification.

Any inactive view is set based on higher level iteration within a model recursion (e.g., a NestedModel), which enables lower level iteration to return derivatives with respect to variables that are active at the higher level.

The Constraints hierarchy manages bound, linear, and nonlinear constraints and utilizes the same specializations for managing bounds on the variables (see MixedConstraints and MergedConstraints).

1.2.5 Interfaces

Class hierarchy: Interface.

Interfaces provide access to simulation codes or, conversely, approximations based on simulation code data. In the simulation case, an ApplicationInterface is used. ApplicationInterface is specialized according to the simulation invocation mechanism, for which the following nonintrusive approaches

- SysCallApplicInterface: the simulation is invoked using a system call (the C function `system()`). Asynchronous invocation utilizes a background system call. Utilizes the SysCallAnalysisCode class to define syntax for input filter, analysis code, output filter, or combined spawning, which in turn utilize the CommandShell utility.
- ForkApplicInterface: the simulation is invoked using a fork (the `fork/exec/wait` family of functions). Asynchronous invocation utilizes a nonblocking fork. Utilizes the ForkAnalysisCode class for lower level fork operations.
- GridApplicInterface: the simulation is invoked using distributed resource facilities. This capability is experimental and still under development. The design is evolving into the use of Condor and/or Globus tools.

and the following semi-intrusive approach

- DirectApplicInterface: the simulation is linked into the DAKOTA executable and is invoked using a procedure call. Asynchronous invocations will utilize nonblocking threads (capability not yet available).

are supported. Scheduling of jobs for asynchronous local, message passing, and hybrid parallelism approaches is performed in the ApplicationInterface class, with job initiation and job capture specifics implemented in the derived classes.

In the approximation case, global, multipoint, or local data fit approximations to simulation code response data can be built and used as surrogates for the actual, expensive simulation. The interface class providing this capability is

- ApproximationInterface: builds an approximation using data from a truth model and then employs the approximation for mapping variables to responses. This class contains an array of Approximation objects, one per response function, which support a variety of approximation types using the different Approximation derived classes. These include SurfpackApproximation (provides kriging, MARS, moving least squares, neural network, polynomial regression, and radial basis functions), GaussProcApproximation (Gaussian process models), PecosApproximation (multivariate orthogonal and Lagrange interpolation polynomials from Pecos), TANA3Approximation (two-point adaptive nonlinearity approximation), and TaylorApproximation (local Taylor series).

which is an essential component within the DataFitSurrModel capability described above in Models.

1.2.6 Responses

Class: Response.

The Response class provides an abstract data representation of response functions and their first and second derivatives (gradient vectors and Hessian matrices). These response functions can be interpreted as an objective

function and constraints (optimization data set), residual functions and constraints (least squares data set), or generic response functions (uncertainty quantification data set). This class is not currently part of a class hierarchy, since the abstraction has been sufficiently general and has not required specialization.

1.3 Services

A variety of services are provided in DAKOTA for parallel computing, failure capturing, restart, graphics, etc. An overview of the classes and member functions involved in performing these services is included below.

- Multilevel parallel computing: DAKOTA supports multiple levels of nested parallelism. A strategy can manage concurrent iterators, each of which manages concurrent function evaluations, each of which manages concurrent analyses executing on multiple processors. Partitioning of these levels with MPI communicators is managed in ParallelLibrary and scheduling routines for the levels are part of Strategy, ApplicationInterface, and ForkApplicInterface.

- Parsing: DAKOTA employs the NIDR parser (New Input Deck Reader) to retrieve information from user input files. Parsing options are processed in CommandLineHandler and parsing occurs in ProblemDescDB::manage_inputs() called from main.C. NIDR uses the keyword handlers in the NIDRProblemDescDB derived class to populate data within the ProblemDescDB base class, which maintains a DataStrategy specification and lists of DataMethod, DataModel, DataVariables, DataInterface, and DataResponses specifications. Procedures for modifying the parsing subsystem are described in Instructions for Modifying DAKOTA's Input Specification.

- Failure capturing: Simulation failures can be trapped and managed using exception handling in ApplicationInterface and its derived classes.

- Restart: DAKOTA maintains a record of all function evaluations both in memory (for capturing any duplication) and on the file system (for restarting runs). Restart options are processed in CommandLineHandler and retrieved in ParallelLibrary::specify_outputs_restart(), restart file management occurs in ParallelLibrary::manage_outputs_restart(), and restart file insertions occur in ApplicationInterface. The `dakota_restart_util` executable, built from restart_util.C, provides a variety of services for interrogating, converting, repairing, concatenating, and post-processing restart files.

- Memory management: DAKOTA employs the techniques of reference counting and representation sharing through the use of letter-envelope and handle-body idioms (Coplien, "Advanced C++"). The former idiom provides for memory efficiency and enhanced polymorphism in the following class hierarchies: Strategy, Iterator, Model, Variables, Constraints, Interface, ProblemDescDB, and Approximation. The latter idiom provides for memory efficiency in data-intensive classes which do not involve a class hierarchy. The Response, parser data (DataStrategy, DataMethod, DataModel, DataVariables, DataInterface, and DataResponses) classes use this idiom. When managing reference-counted data containers (e.g., Variables or Response objects), it is important to properly manage shallow and deep copies, to allow for both efficiency and data independence as needed in a particular context.

- Graphics: DAKOTA provides 2D iteration history graphics using Motif widgets. Graphics data can also be catalogued in a tabular data file for post-processing with 3rd party tools such as Matlab, Tecplot, etc. These capabilities are encapsulated within the Graphics class.

1.4 Additional Resources

Additional development resources include:

- Recommended Practices for DAKOTA Development
- Software Tools for DAKOTA Development
- Instructions for Modifying DAKOTA's Input Specification
- Understanding Iterator Flow
- Interfacing with DAKOTA as a Library
- The execution of function evaluations is a core component of DAKOTA involving several class hierarchies. An overview of the classes and member functions involved in performing these evaluations is provided in Performing Function Evaluations.
- Project web pages are maintained at `http://dakota.sandia.gov/` including documentation at `http://dakota.sandia.gov/documentation.html` and a list of publications at `http://dakota.sandia.gov/dakota/publications.html`

Chapter 2

DAKOTA Namespace Index

2.1 DAKOTA Namespace List

Here is a list of all documented namespaces with brief descriptions:

Dakota (The primary namespace for DAKOTA) 29
SIM (Plug facilities into DAKOTA) 165

Chapter 3

DAKOTA Hierarchical Index

3.1 DAKOTA Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

ActiveSet . . . 167
AnalysisCode . . . 170
  ForkAnalysisCode . . . 335
  SysCallAnalysisCode . . . 730
Approximation . . . 191
  GaussProcApproximation . . . 344
  PecosApproximation . . . 616
  SurfpackApproximation . . . 706
  TANA3Approximation . . . 735
  TaylorApproximation . . . 737
APPSEvalMgr . . . 204
BaseConstructor . . . 210
BiStream . . . 211
BoStream . . . 214
COLINApplication . . . 217
CommandShell . . . 227
Constraints . . . 240
  MergedConstraints . . . 410
  MixedConstraints . . . 422
CtelRegexp . . . 252
DataInterface . . . 265
DataMethod . . . 267
DataMethodRep . . . 269
DataModel . . . 282
DataModelRep . . . 284
DataResponses . . . 288
DataResponsesRep . . . 290
DataStrategy . . . 294

DataStrategyRep . . . 296
DataVariables . . . 299
DataVariablesRep . . . 302
ErrorTable . . . 334
GetLongOpt . . . 350
  CommandLineHandler . . . 225
Graphics . . . 354
Interface . . . 366
  ApplicationInterface . . . 180
    DirectApplicInterface . . . 316
      ParallelDirectApplicInterface . . . 588
      SerialDirectApplicInterface . . . 667
    ForkApplicInterface . . . 337
    GridApplicInterface . . . 357
    SysCallApplicInterface . . . 732
  ApproximationInterface . . . 199
Iterator . . . 376
  Analyzer . . . 175
    NonD . . . 489
      NonDCalibration . . . 503
        NonDBayesCalibration . . . 501
          NonDGPMSABayesCalibration . . . 523
          NonDQUESOBayesCalibration . . . 561
      NonDExpansion . . . 507
        NonDPolynomialChaos . . . 556
        NonDStochCollocation . . . 576
      NonDIntegration . . . 528
        NonDCubature . . . 504
        NonDQuadrature . . . 558
        NonDSparseGrid . . . 573
      NonDInterval . . . 530
        NonDGlobalInterval . . . 514
          NonDGlobalEvidence . . . 512
          NonDGlobalSingleInterval . . . 521
        NonDLHSInterval . . . 535
          NonDLHSEvidence . . . 533
          NonDLHSSingleInterval . . . 540
        NonDLocalInterval . . . 544
          NonDLocalEvidence . . . 542
          NonDLocalSingleInterval . . . 554
      NonDReliability . . . 563
        NonDGlobalReliability . . . 518
        NonDLocalReliability . . . 547
      NonDSampling . . . 567
        NonDAdaptImpSampling . . . 497
        NonDIncremLHSSampling . . . 526
        NonDLHSSampling . . . 537

PStudyDACE . . . 632
DDACEDesignCompExp . . . 312
FSUDesignCompExp . . . 340
ParamStudy . . . 609
PSUADEDesignCompExp . . . 635
Verification . . . 755
RichExtrapVerification . . . 658
Minimizer . . . 414
LeastSq . . . 406
NL2SOLLeastSq . . . 478
NLSSOLLeastSq . . . 486
SNLLLeastSq . . . 682
Optimizer . . . 581
APPSOptimizer . . . 207
COLINOptimizer . . . 220
CONMINOptimizer . . . 232
DOTOptimizer . . . 324
JEGAOptimizer . . . 388
NCSUOptimizer . . . 461
NLPQLPOptimizer . . . 481
NPSOLOptimizer . . . 577
SNLLOptimizer . . . 686
SurrBasedMinimizer . . . 719
EffGlobalMinimizer . . . 329
SurrBasedGlobalMinimizer . . . 710
SurrBasedLocalMinimizer . . . 712
JEGAOptimizer::Driver . . . 396
JEGAOptimizer::Evaluator . . . 398
JEGAOptimizer::EvaluatorCreator . . . 404
Model . . . 426
NestedModel . . . 464
RecastModel . . . 640
SingleModel . . . 676
SurrogateModel . . . 724
DataFitSurrModel . . . 255
HierarchSurrModel . . . 360
Model::FDhelp . . . 454
MPIPackBuffer . . . 455
MPIUnpackBuffer . . . 458
NL2Res . . . 477
NoDBBaseConstructor . . . 488
ParallelConfiguration . . . 586
ParallelLevel . . . 589
ParallelLibrary . . . 592
ParamResponsePair . . . 605
partial_prp_equality . . . 614
partial_prp_hash . . . 615
ProblemDescDB . . . 622

NIDRProblemDescDB . . . 472
RecastBaseConstructor . . . 639
Response . . . 647
ResponseRep . . . 652
SensAnalysisGlobal . . . 661
SharedVariablesData . . . 668
SharedVariablesDataRep . . . 671
SNLLBase . . . 679
SNLLLeastSq . . . 682
SNLLOptimizer . . . 686
SOLBase . . . 693
NLSSOLLeastSq . . . 486
NPSOLOptimizer . . . 577
Strategy . . . 696
ConcurrentStrategy . . . 229
HybridStrategy . . . 364
CollaborativeHybridStrategy . . . 223
EmbeddedHybridStrategy . . . 332
SequentialHybridStrategy . . . 663
SingleMethodStrategy . . . 674
String . . . 703
TrackerHTTP . . . 739
Variables . . . 742
MergedVariables . . . 412
MixedVariables . . . 424

Chapter 4

DAKOTA Class Index

4.1 DAKOTA Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

ActiveSet (Active set request vector and the derivative variables vector) 167
AnalysisCode (Processes for managing simulations) 170
Analyzer (Hierarchy) 175
ApplicationInterface (Interfaces to simulation codes) 180
Approximation (Base class for the approximation class hierarchy) 191
ApproximationInterface (Approximations to simulation-based results) 199
APPSEvalMgr (Evaluation manager class for APPSPACK) 204
APPSOptimizer (Wrapper class for APPSPACK) 207
BaseConstructor (Dummy struct for overloading letter-envelope constructors) 210
BiStream (Data types) 211
BoStream (Data types) 214
COLINApplication 217
COLINOptimizer (Wrapper class for optimizers defined using COLIN) 220
CollaborativeHybridStrategy (Optimization and nonlinear least squares methods) 223
CommandLineHandler (Utility class for managing command line inputs to DAKOTA) 225
CommandShell (Processes with system calls) 227
ConcurrentStrategy (Strategy for multi-start iteration or pareto set optimization) 229
CONMINOptimizer (Wrapper class for the CONMIN optimization library) 232
Constraints (Base class for the variable constraints class hierarchy) 240
CtelRegexp 252
DataFitSurrModel (Data fit surrogates (global and local)) 255
DataInterface (Handle class for interface specification data) 265
DataMethod (Handle class for method specification data) 267
DataMethodRep (Body class for method specification data) 269
DataModel (Handle class for model specification data) 282
DataModelRep (Body class for model specification data) 284
DataResponses (Handle class for responses specification data) 288
DataResponsesRep (Body class for responses specification data) 290
DataStrategy (Handle class for strategy specification data) 294

DataStrategyRep (Body class for strategy specification data) . . . 296
DataVariables (Handle class for variables specification data) . . . 299
DataVariablesRep (Body class for variables specification data) . . . 302
DDACEDesignCompExp (Wrapper class for the DDACE design of experiments library) . . . 312
DirectApplicInterface (And testers using direct procedure calls) . . . 316
DOTOptimizer (Wrapper class for the DOT optimization library) . . . 324
EffGlobalMinimizer (Implementation of Efficient Global Optimization/Least Squares algorithms) . . . 329
EmbeddedHybridStrategy (Search methods) . . . 332
ErrorTable (Data structure to hold errors) . . . 334
ForkAnalysisCode (Simulations using forks) . . . 335
ForkApplicInterface (Using forks) . . . 337
FSUDesignCompExp (Wrapper class for the FSUDace QMC/CVT library) . . . 340
GaussProcApproximation (Derived approximation class for Gaussian Process implementation) . . . 344
GetLongOpt ((Advanced Computer Research Institute, Lyon, France)) . . . 350
Graphics (For post-processing with Matlab, Tecplot, etc) . . . 354
GridApplicInterface (Using grid services such as Condor or Globus) . . . 357
HierarchSurrModel (Hierarchical surrogates (models of varying fidelity)) . . . 360
HybridStrategy (Base class for hybrid minimization strategies) . . . 364
Interface (Base class for the interface class hierarchy) . . . 366
Iterator (Base class for the iterator class hierarchy) . . . 376
JEGAOptimizer (A version of Dakota::Optimizer for instantiation of John Eddy's Genetic Algorithms (JEGA)) . . . 388
JEGAOptimizer::Driver (A subclass of the JEGA front end driver that exposes the individual protected methods to execute the algorithm) . . . 396
JEGAOptimizer::Evaluator (An evaluator specialization that knows how to interact with Dakota) . . . 398
JEGAOptimizer::EvaluatorCreator (A specialization of the JEGA::FrontEnd::EvaluatorCreator that creates a new instance of a Evaluator) . . . 404
LeastSq (Base class for the nonlinear least squares branch of the iterator hierarchy) . . . 406
MergedConstraints (Merged data view) . . . 410
MergedVariables (Merged data view) . . . 412
Minimizer (Iterator hierarchy) . . . 414
MixedConstraints (Default data view (no variable or domain type array merging)) . . . 422
MixedVariables (Default data view (no variable or domain type array merging)) . . . 424
Model (Base class for the model class hierarchy) . . . 426
Model::FDhelp (Possibly adjusted for bounds) . . . 454
MPIPackBuffer (Class for packing MPI message buffers) . . . 455
MPIUnpackBuffer (Class for unpacking MPI message buffers) . . . 458
NCSUOptimizer (Wrapper class for the NCSU DIRECT optimization library) . . . 461
NestedModel (Execution within every evaluation of the model) . . . 464
NIDRProblemDescDB (The derived input file database utilizing the new IDR parser) . . . 472
NL2Res (Auxiliary information passed to calcr and calcj via ur) . . . 477
NL2SOLLeastSq (Wrapper class for the NL2SOL nonlinear least squares library) . . . 478
NLPQLPOptimizer (Wrapper class for the NLPQLP optimization library, Version 2.0) . . . 481
NLSSOLLeastSq (Wrapper class for the NLSSOL nonlinear least squares library) . . . 486
NoDBBaseConstructor (Dummy struct for overloading constructors used in on-the-fly instantiations) . . . 488
NonD (Base class for all nondetermistic iterators (the DAKOTA/UQ branch)) . . . 489
NonDAdaptImpSampling (Class for the Adaptive Importance Sampling methods within DAKOTA) . . . 497
NonDBayesCalibration (Distribution on model parameters given experimental data) . . . 501
NonDCalibration . . . 503

NonDCubature (Numerical cubature points for evaluation of expectation integrals) 504
NonDExpansion (Collocation (SC)) 507
NonDGlobalEvidence (Class for the Dempster-Shafer Evidence Theory methods within DAKOTA/UQ) 512
NonDGlobalInterval (To calculate interval bounds for epistemic uncertainty quantification) 514
NonDGlobalReliability (Class for global reliability methods within DAKOTA/UQ) 518
NonDGlobalSingleInterval (To calculate interval bounds for epistemic uncertainty quantification) . . . 521
NonDGPMSABayesCalibration (Generates posterior distribution on model parameters given experiment data) 523
NonDIncremLHSSampling (Performs icremental LHS sampling for uncertainty quantification) 526
NonDIntegration (Numerical integration points for evaluation of expectation integrals) 528
NonDInterval (Base class for interval-based methods within DAKOTA/UQ) 530
NonDLHSEvidence (Class for the Dempster-Shafer Evidence Theory methods within DAKOTA/UQ) . 533
NonDLHSInterval (Class for the LHS-based interval methods within DAKOTA/UQ) 535
NonDLHSSampling (Performs LHS and Monte Carlo sampling for uncertainty quantification) 537
NonDLHSSingleInterval (Class for pure interval propagation using LHS) 540
NonDLocalEvidence (Class for the Dempster-Shafer Evidence Theory methods within DAKOTA/UQ) 542
NonDLocalInterval (Calculate interval bounds for epistemic uncertainty quantification) 544
NonDLocalReliability (Class for the reliability methods within DAKOTA/UQ) 547
NonDLocalSingleInterval (Calculate interval bounds for epistemic uncertainty quantification) 554
NonDPolynomialChaos (Quantification) 556
NonDQuadrature (Normals/uniforms/exponentials/betas/gammas) 558
NonDQUESOBayesCalibration (Bayesian inference using the QUESO library from UT Austin) 561
NonDReliability (Base class for the reliability methods within DAKOTA/UQ) 563
NonDSampling (NonDIncremLHSSampling, and NonDAdaptImpSampling) 567
NonDSparseGrid (Integrals over independent standard random variables) 573
NonDStochCollocation (Quantification) 576
NPSOLOptimizer (Wrapper class for the NPSOL optimization library) 577
Optimizer (Base class for the optimizer branch of the iterator hierarchy) 581
ParallelConfiguration (Collectively identify a particular multilevel parallel configuration) 586
ParallelDirectApplicInterface (Plug-ins using assign_rep()) 588
ParallelLevel (Communicator partitioning) 589
ParallelLibrary (Message passing within these levels) 592
ParamResponsePair (Evaluation id) 605
ParamStudy (Class for vector, list, centered, and multidimensional parameter studies) 609
partial_prp_equality (Predicate for comparing ONLY the idInterface and Vars attributes of PRPair) . . . 614
partial_prp_hash (Wrapper to delegate to the ParamResponsePair hash_value function) 615
PecosApproximation (Derived approximation class for global basis polynomials) 616
ProblemDescDB (The database containing information parsed from the DAKOTA input file) 622
PStudyDACE (Design of experiments methods) 632
PSUADEDesignCompExp (Wrapper class for the PSUADE library) 635
RecastBaseConstructor (Instantiations) 639
RecastModel (In order to recast the form of its inputs and/or outputs) 640
Response (Response provides the handle class) 647
ResponseRep (ResponseRep provides the body class) 652
RichExtrapVerification (Class for Richardson extrapolation for code and solution verification) 658
SensAnalysisGlobal (And variance-based decomposition) 661
SequentialHybridStrategy (Models of varying fidelity) 663
SerialDirectApplicInterface (Plug-ins using assign_rep()) 667
SharedVariablesData (Among a set of Variables instances) 668

SharedVariablesDataRep (Or body, may be shared by multiple SharedVariablesData handle instances) . 671
SingleMethodStrategy (Single model) 674
SingleModel (Variables into responses) 676
SNLLBase (Base class for OPT++ optimization and least squares methods) 679
SNLLLeastSq (Wrapper class for the OPT++ optimization library) 682
SNLLOptimizer (Wrapper class for the OPT++ optimization library) 686
SOLBase (Base class for Stanford SOL software) 693
Strategy (Base class for the strategy class hierarchy) 696
String (Dakota::String class, used as main string class for Dakota) 703
SurfpackApproximation (Interface between Surfpack and Dakota) 706
SurrBasedGlobalMinimizer (And updates a global surrogate model without trust region controls) . . . 710
SurrBasedLocalMinimizer (And nonlinear least squares) 712
SurrBasedMinimizer (Base class for local/global surrogate-based optimization/least squares) 719
SurrogateModel (Base class for surrogate models (DataFitSurrModel and HierarchSurrModel)) 724
SysCallAnalysisCode (Simulations using system calls) 730
SysCallApplicInterface (Using system calls) 732
TANA3Approximation (Approximation (a multipoint approximation)) 735
TaylorApproximation (Series (a local approximation)) 737
TrackerHTTP (Curl library) 739
Variables (Base class for the variables class hierarchy) 742
Verification (Base class for managing common aspects of verification studies) 755

Chapter 5

DAKOTA File Index

5.1 DAKOTA File List

Here is a list of all documented files with brief descriptions:

dll_api.C (This file contains a DakotaRunner class, which launches DAKOTA) 757
dll_api.h (API for DLL interactions) 759
JEGAOptimizer.C (Contains the implementation of the JEGAOptimizer class) 761
JEGAOptimizer.H (Contains the definition of the JEGAOptimizer class) 762
library_mode.C (File containing a mock simulator main for testing DAKOTA in library mode) 763
library_split.C (File containing a mock simulator main for testing DAKOTA in library mode on a split communicator) 765
main.C (File containing the main program for DAKOTA) 766
restart_util.C (File containing the DAKOTA restart utility main program) 767

Chapter 6

DAKOTA Page Index

6.1 DAKOTA Related Pages

Here is a list of all related documentation pages:

Recommended Practices for DAKOTA Development 769
Instructions for Modifying DAKOTA's Input Specification 773
Understanding Iterator Flow 779
Interfacing with DAKOTA as a Library 781
Performing Function Evaluations 791
Software Tools for DAKOTA Development 793
Todo List . . . . . **??**

Chapter 7

DAKOTA Namespace Documentation

7.1 Dakota Namespace Reference

The primary namespace for DAKOTA.

Classes

- class AnalysisCode

  processes for managing simulations.

- class ApplicationInterface

  interfaces to simulation codes.

- class ApproximationInterface

  approximations to simulation-based results.

- class APPSEvalMgr

  Evaluation manager class for APPSPACK.

- class APPSOptimizer

  Wrapper class for APPSPACK.

- class COLINApplication
- class COLINOptimizer

  Wrapper class for optimizers defined using COLIN.

- class CollaborativeHybridStrategy

  optimization and nonlinear least squares methods.

- class GetLongOpt

  (Advanced Computer Research Institute, Lyon, France).

- class CommandLineHandler

  Utility class for managing command line inputs to DAKOTA.

- class CommandShell

  processes with system calls.

- class ConcurrentStrategy

  Strategy for multi-start iteration or pareto set optimization.

- class CONMINOptimizer

  Wrapper class for the CONMIN optimization library.

- class ActiveSet

  active set request vector and the derivative variables vector.

- class Analyzer

  hierarchy.

- class Approximation

  Base class for the approximation class hierarchy.

- class BiStream

  data types

- class BoStream

  data types

- class Constraints

  Base class for the variable constraints class hierarchy.

- class Graphics

  for post-processing with Matlab, Tecplot, etc.

- class Interface

  Base class for the interface class hierarchy.

- class Iterator

  Base class for the iterator class hierarchy.

- class LeastSq

  Base class for the nonlinear least squares branch of the iterator hierarchy.

- class Minimizer

  iterator hierarchy.

- class Model

  Base class for the model class hierarchy.

- class NonD

  Base class for all nondetermistic iterators (the DAKOTA/UQ branch).

- class Optimizer

  Base class for the optimizer branch of the iterator hierarchy.

- class PStudyDACE

  design of experiments methods.

- class ResponseRep

  ResponseRep provides the body class.

- class Response

  Response provides the handle class.

- class Strategy

  Base class for the strategy class hierarchy.

- class String

  Dakota::String class, used as main string class for Dakota.

- class Variables

  Base class for the variables class hierarchy.

- class Verification

  Base class for managing common aspects of verification studies.

- class DataFitSurrModel

  data fit surrogates (global and local)

- class DataInterface

  Handle class for interface specification data.

- class DataMethodRep

  Body class for method specification data.

- class DataMethod

  Handle class for method specification data.

- class DataModelRep

  Body class for model specification data.

- class DataModel

Handle class for model specification data.

- class DataResponsesRep

  Body class for responses specification data.

- class DataResponses

  Handle class for responses specification data.

- class DataStrategyRep

  Body class for strategy specification data.

- class DataStrategy

  Handle class for strategy specification data.

- class DataVariablesRep

  Body class for variables specification data.

- class DataVariables

  Handle class for variables specification data.

- class DDACEDesignCompExp

  Wrapper class for the DDACE design of experiments library.

- class DirectApplicInterface

  and testers using direct procedure calls.

- class DOTOptimizer

  Wrapper class for the DOT optimization library.

- class EffGlobalMinimizer

  Implementation of Efficient Global Optimization/Least Squares algorithms.

- class EmbeddedHybridStrategy

  search methods.

- class ForkAnalysisCode

  simulations using forks.

- class ForkApplicInterface

  using forks.

- class FSUDesignCompExp

  Wrapper class for the FSUDace QMC/CVT library.

- class GaussProcApproximation

  Derived approximation class for Gaussian Process implementation.

- struct BaseConstructor

  Dummy struct for overloading letter-envelope constructors.

- struct NoDBBaseConstructor

  Dummy struct for overloading constructors used in on-the-fly instantiations.

- struct RecastBaseConstructor

  instantiations.

- class GridApplicInterface

  using grid services such as Condor or Globus.

- class HierarchSurrModel

  hierarchical surrogates (models of varying fidelity).

- class HybridStrategy

  Base class for hybrid minimization strategies.

- class JEGAOptimizer

  A version of Dakota::Optimizer for instantiation of John Eddy's Genetic Algorithms (JEGA).

- class MergedConstraints

  the merged data view.

- class MergedVariables

  merged data view.

- class MixedConstraints

  the default data view (no variable or domain type array merging).

- class MixedVariables

  the default data view (no variable or domain type array merging).

- class MPIPackBuffer

  Class for packing MPI message buffers.

- class MPIUnpackBuffer

  Class for unpacking MPI message buffers.

- class NCSUOptimizer

  Wrapper class for the NCSU DIRECT optimization library.

- class NestedModel

  execution within every evaluation of the model.

- class NIDRProblemDescDB

  The derived input file database utilizing the new IDR parser.

- struct NL2Res

  Auxiliary information passed to calcr and calcj via ur.

- class NL2SOLLeastSq

  Wrapper class for the NL2SOL nonlinear least squares library.

- class NLPQLPOptimizer

  Wrapper class for the NLPQLP optimization library, Version 2.0.

- class NLSSOLLeastSq

  Wrapper class for the NLSSOL nonlinear least squares library.

- class NonDAdaptImpSampling

  Class for the Adaptive Importance Sampling methods within DAKOTA.

- class NonDBayesCalibration

  distribution on model parameters given experimental data

- class NonDCalibration
- class NonDCubature

  numerical cubature points for evaluation of expectation integrals.

- class NonDExpansion

  collocation (SC)

- class NonDGlobalEvidence

  Class for the Dempster-Shafer Evidence Theory methods within DAKOTA/UQ.

- class NonDGlobalInterval

  to calculate interval bounds for epistemic uncertainty quantification

- class NonDGlobalReliability

  Class for global reliability methods within DAKOTA/UQ.

- class NonDGlobalSingleInterval

  to calculate interval bounds for epistemic uncertainty quantification

- class NonDGPMSABayesCalibration

  Generates posterior distribution on model parameters given experiment data.

- class NonDIncremLHSSampling

  Performs icremental LHS sampling for uncertainty quantification.

- class NonDIntegration

  numerical integration points for evaluation of expectation integrals

- class NonDInterval

  Base class for interval-based methods within DAKOTA/UQ.

- class NonDLHSEvidence

  Class for the Dempster-Shafer Evidence Theory methods within DAKOTA/UQ.

- class NonDLHSInterval

  Class for the LHS-based interval methods within DAKOTA/UQ.

- class NonDLHSSampling

  Performs LHS and Monte Carlo sampling for uncertainty quantification.

- class NonDLHSSingleInterval

  Class for pure interval propagation using LHS.

- class NonDLocalEvidence

  Class for the Dempster-Shafer Evidence Theory methods within DAKOTA/UQ.

- class NonDLocalInterval

  calculate interval bounds for epistemic uncertainty quantification

- class NonDLocalReliability

  Class for the reliability methods within DAKOTA/UQ.

- class NonDLocalSingleInterval

  calculate interval bounds for epistemic uncertainty quantification

- class NonDPolynomialChaos

  quantification

- class NonDQuadrature

  normals/uniforms/exponentials/betas/gammas.

- class NonDQUESOBayesCalibration

  Bayesian inference using the QUESO library from UT Austin.

- class NonDReliability

  Base class for the reliability methods within DAKOTA/UQ.

- class NonDSampling

  NonDIncremLHSSampling, and NonDAdaptImpSampling.

- class NonDSparseGrid

integrals over independent standard random variables.

- class NonDStochCollocation

  quantification

- class NPSOLOptimizer

  Wrapper class for the NPSOL optimization library.

- class ParallelLevel

  communicator partitioning.

- class ParallelConfiguration

  collectively identify a particular multilevel parallel configuration.

- class ParallelLibrary

  message passing within these levels.

- class ParamResponsePair

  evaluation id.

- class ParamStudy

  Class for vector, list, centered, and multidimensional parameter studies.

- class PecosApproximation

  Derived approximation class for global basis polynomials.

- class ProblemDescDB

  The database containing information parsed from the DAKOTA input file.

- struct partial_prp_hash

  wrapper to delegate to the ParamResponsePair hash_value function

- struct partial_prp_equality

  predicate for comparing ONLY the idInterface and Vars attributes of PRPair

- class PSUADEDesignCompExp

  Wrapper class for the PSUADE library.

- class RecastModel

  in order to recast the form of its inputs and/or outputs.

- class RichExtrapVerification

  Class for Richardson extrapolation for code and solution verification.

- class SensAnalysisGlobal

  and variance-based decomposition

- class SequentialHybridStrategy

  models of varying fidelity.

- class SharedVariablesDataRep

  or body, may be shared by multiple SharedVariablesData handle instances.

- class SharedVariablesData

  among a set of Variables instances.

- class SingleMethodStrategy

  single model.

- class SingleModel

  variables into responses.

- class SNLLBase

  Base class for OPT++ optimization and least squares methods.

- class SNLLLeastSq

  Wrapper class for the OPT++ optimization library.

- class SNLLOptimizer

  Wrapper class for the OPT++ optimization library.

- class SOLBase

  Base class for Stanford SOL software.

- class SurfpackApproximation

  Interface between Surfpack and Dakota.

- class SurrBasedGlobalMinimizer

  and updates a global surrogate model without trust region controls

- class SurrBasedLocalMinimizer

  and nonlinear least squares.

- class SurrBasedMinimizer

  Base class for local/global surrogate-based optimization/least squares.

- class SurrogateModel

  Base class for surrogate models (DataFitSurrModel and HierarchSurrModel).

- class SysCallAnalysisCode

  simulations using system calls.

- class SysCallApplicInterface

  using system calls.

- class TANA3Approximation

  approximation (a multipoint approximation).

- class TaylorApproximation

  series (a local approximation).

- class TrackerHTTP

  curl library

Typedefs

- typedef void(∗) **p_vf** (void)
- typedef Dakota::Libentry **Libentry**
- typedef Dakota::SharedLib **SharedLib**
- typedef double **Real**
- typedef Teuchos::SerialDenseVector< int, Real > **RealVector**
- typedef Teuchos::SerialDenseVector< int, int > **IntVector**
- typedef Teuchos::SerialDenseMatrix< int, Real > **RealMatrix**
- typedef Teuchos::SerialSymDenseMatrix< int, Real > **RealSymMatrix**
- typedef std::deque< bool > **BoolDeque**
- typedef std::vector< BoolDeque > **BoolDequeArray**
- typedef std::vector< Real > **RealArray**
- typedef std::vector< RealArray > **Real2DArray**
- typedef std::vector< int > **IntArray**
- typedef std::vector< IntArray > **Int2DArray**
- typedef std::vector< short > **ShortArray**
- typedef std::vector< unsigned short > **UShortArray**
- typedef std::vector< UShortArray > **UShort2DArray**
- typedef std::vector< UShort2DArray > **UShort3DArray**
- typedef std::vector< size_t > **SizetArray**
- typedef std::vector< SizetArray > **Sizet2DArray**
- typedef std::vector< String > **StringArray**
- typedef std::vector< StringArray > **String2DArray**
- typedef boost::multi_array_types::index_range **idx_range**
- typedef boost::multi_array< String, 1 > **StringMultiArray**
- typedef StringMultiArray::array_view< 1 >::type **StringMultiArrayView**
- typedef StringMultiArray::const_array_view< 1 >::type **StringMultiArrayConstView**
- typedef boost::multi_array< unsigned short, 1 > **UShortMultiArray**
- typedef UShortMultiArray::array_view< 1 >::type **UShortMultiArrayView**
- typedef UShortMultiArray::const_array_view< 1 >::type **UShortMultiArrayConstView**
- typedef boost::multi_array< size_t, 1 > **SizetMultiArray**
- typedef SizetMultiArray::array_view< 1 >::type **SizetMultiArrayView**

- typedef SizetMultiArray::const_array_view< 1 >::type **SizetMultiArrayConstView**
- typedef std::vector< RealVector > **RealVectorArray**
- typedef std::vector< RealVectorArray > **RealVector2DArray**
- typedef std::vector< RealMatrix > **RealMatrixArray**
- typedef std::vector< RealSymMatrix > **RealSymMatrixArray**
- typedef std::vector< IntVector > **IntVectorArray**
- typedef std::vector< Variables > **VariablesArray**
- typedef std::vector< Response > **ResponseArray**
- typedef std::vector< ParamResponsePair > **PRPArray**
- typedef std::vector< PRPArray > **PRP2DArray**
- typedef std::vector< Pecos::SurrogateDataPoint > **SDPArray**
- typedef std::vector< SDPArray > **SDP2DArray**
- typedef std::vector< Model > **ModelArray**
- typedef std::vector< Iterator > **IteratorArray**
- typedef std::list< bool > **BoolList**
- typedef std::list< int > **IntList**
- typedef std::list< size_t > **SizetList**
- typedef std::list< Real > **RealList**
- typedef std::list< String > **StringList**
- typedef std::list< Pecos::SurrogateDataPoint > **SDPList**
- typedef std::list< Variables > **VariablesList**
- typedef std::list< Interface > **InterfaceList**
- typedef std::list< Response > **ResponseList**
- typedef std::list< Model > **ModelList**
- typedef std::list< Iterator > **IteratorList**
- typedef std::pair< int, String > **IntStringPair**
- typedef std::pair< Real, Real > **RealRealPair**
- typedef std::set< Real > **RealSet**
- typedef std::set< int > **IntSet**
- typedef std::vector< RealSet > **RealSetArray**
- typedef std::vector< IntSet > **IntSetArray**
- typedef std::map< int, int > **IntIntMap**
- typedef std::map< int, short > **IntShortMap**
- typedef std::map< int, RealVector > **IntRealVectorMap**
- typedef std::map< int, ActiveSet > **IntActiveSetMap**
- typedef std::map< int, Variables > **IntVariablesMap**
- typedef std::map< int, Response > **IntResponseMap**
- typedef std::map< IntArray, size_t > **IntArraySizetMap**
- typedef std::multimap< RealRealPair, ParamResponsePair > **RealPairPRPMultiMap**
- typedef IntList::iterator **ILIter**
- typedef IntList::const_iterator **ILCIter**
- typedef SizetList::iterator **StLIter**
- typedef SizetList::const_iterator **StLCIter**
- typedef RealList::iterator **RLIter**
- typedef RealList::const_iterator **RLCIter**
- typedef StringList::iterator **StringLIter**

- typedef StringList::const_iterator **StringLCIter**
- typedef SDPList::iterator **SDPLIter**
- typedef SDPList::const_iterator **SDPLCIter**
- typedef SDPList::difference_type **SDPLDiffT**
- typedef SDPArray::iterator **SDPAIter**
- typedef SDP2DArray::iterator **SDP2AIter**
- typedef VariablesList::iterator **VarsLIter**
- typedef InterfaceList::iterator **InterfLIter**
- typedef ResponseList::iterator **RespLIter**
- typedef ModelList::iterator **ModelLIter**
- typedef IteratorList::iterator **IterLIter**
- typedef std::list< ParallelLevel >::iterator **ParLevLIter**
- typedef std::list< ParallelConfiguration >::iterator **ParConfigLIter**
- typedef IntSet::iterator **ISIter**
- typedef IntSet::const_iterator **ISCIter**
- typedef IntIntMap::iterator **IntIntMIter**
- typedef IntIntMap::const_iterator **IntIntMCIter**
- typedef IntShortMap::iterator **IntShMIter**
- typedef IntRealVectorMap::iterator **IntRDVMIter**
- typedef IntRealVectorMap::const_iterator **IntRDVMCIter**
- typedef IntActiveSetMap::iterator **IntASMIter**
- typedef IntVariablesMap::iterator **IntVarsMIter**
- typedef IntVariablesMap::const_iterator **IntVarsMCIter**
- typedef IntResponseMap::iterator **IntRespMIter**
- typedef IntResponseMap::const_iterator **IntRespMCIter**
- typedef void(∗) **dl_find_optimum_t** (void ∗, Optimizer1 ∗, char ∗)
- typedef void(∗) **dl_destructor_t** (void ∗∗)
- typedef Dakota::Filesys_buf **Filesys_buf**
- typedef int(∗) **ftw_fn** (const char ∗file, const struct stat ∗, int ftype, int depth, void ∗v)
- typedef dirent **dirent**
- typedef Dakota::Cbuf **Cbuf**
- typedef Dakota::Buf **Buf**
- typedef Dakota::Finfo **Finfo**
- typedef Teuchos::SerialDenseSolver< int, Real > **RealSolver**
- typedef Teuchos::SerialSpdDenseSolver< int, Real > **RealSpdSolver**
- typedef int(∗) start_grid_computing_t (char ∗analysis_driver_script, char ∗params_file, char ∗results_file)

  definition of start grid computing type (function pointer)

- typedef int(∗) perform_analysis_t (char ∗iteration_num)

  definition of perform analysis type (function pointer)

- typedef int ∗(∗) get_jobs_completed_t ()

  definition of get completed jobs type (function pointer)

- typedef int(∗) stop_grid_computing_t ()

  definition of stop grid computing type (function pointer)

- typedef unsigned char **u_char**
- typedef unsigned short **u_short**
- typedef unsigned int **u_int**
- typedef unsigned long **u_long**
- typedef long long **long_long**
- typedef unsigned long **UL**
- typedef void(∗) **Calcrj** (int ∗n, int ∗p, Real ∗x, int ∗nf, Real ∗r, int ∗ui, void ∗ur, Vf vf)
- typedef void(∗) **Vf** ()
- typedef bmi::multi_index_container< Dakota::ParamResponsePair, bmi::indexed_by< bmi::ordered_unique< bmi::tag< ordered >, bmi::const_mem_fun< Dakota::ParamResponsePair, const IntStringPair &,&Dakota::ParamResponsePair::eval_interface_ids > >, bmi::hashed_non_unique< bmi::tag< hashed >, bmi::identity< Dakota::ParamResponsePair >, partial_prp_hash, partial_prp_equality > > > PRPMultiIndexCache

  Boost Multi-Index Container for caching ParamResponsePairs.

- typedef PRPMultiIndexCache **PRPCache**
- typedef PRPCache::index_iterator< ordered >::type **PRPCacheOIter**
- typedef PRPCache::index_const_iterator< ordered >::type **PRPCacheOCIter**
- typedef PRPCache::index_iterator< hashed >::type **PRPCacheHIter**
- typedef PRPCache::index_const_iterator< hashed >::type **PRPCacheHCIter**
- typedef PRPCacheOIter **PRPCacheIter**
- typedef PRPCacheOCIter **PRPCacheCIter**
- typedef bmi::multi_index_container< Dakota::ParamResponsePair, bmi::indexed_by< bmi::ordered_unique< bmi::tag< ordered >, bmi::const_mem_fun< Dakota::ParamResponsePair, int,&Dakota::ParamResponsePair::eval_id > >, bmi::hashed_non_unique< bmi::tag< hashed >, bmi::identity< Dakota::ParamResponsePair >, partial_prp_hash, partial_prp_equality > > > PRPMultiIndexQueue

  Boost Multi-Index Container for queueing ParamResponsePairs.

- typedef PRPMultiIndexQueue **PRPQueue**
- typedef PRPQueue::index_iterator< ordered >::type **PRPQueueOIter**
- typedef PRPQueue::index_const_iterator< ordered >::type **PRPQueueOCIter**
- typedef PRPQueue::index_iterator< hashed >::type **PRPQueueHIter**
- typedef PRPQueue::index_const_iterator< hashed >::type **PRPQueueHCIter**
- typedef PRPQueueOIter **PRPQueueIter**
- typedef PRPQueueOCIter **PRPQueueCIter**

Enumerations

- enum {

  COBYLA, **DIRECT**, **EA**, **MS**,

  PS, **SW** }
- enum { **OBJECTIVE**, **INEQUALITY_CONSTRAINT**, **EQUALITY_CONSTRAINT** }

  define algebraic function types

- enum {

  SILENT_OUTPUT, **QUIET_OUTPUT**, **NORMAL_OUTPUT**, **VERBOSE_OUTPUT**,

  DEBUG_OUTPUT }
- enum { **STD_NORMAL_U**, **ASKEY_U**, **EXTENDED_U** }
- enum { **NO_INT_REFINE**, **IS**, **AIS**, **MMAIS** }
- enum { **PROBABILITIES**, **RELIABILITIES**, **GEN_RELIABILITIES** }
- enum { **IGNORE_RANKS**, **SET_RANKS**, **GET_RANKS**, **SET_GET_RANKS** }
- enum {

  UNCERTAIN, **UNCERTAIN_UNIFORM**, **ACTIVE**, **ACTIVE_UNIFORM**,

  ALL, **ALL_UNIFORM** }
- enum {

  MV, **AMV_X**, **AMV_U**, **AMV_PLUS_X**,

  AMV_PLUS_U, **TANA_X**, **TANA_U**, **NO_APPROX** }
- enum { **BREITUNG**, **HOHENRACK**, **HONG** }
- enum { **EGRA_X**, **EGRA_U** }
- enum { **ORIGINAL_PRIMARY**, **SINGLE_OBJECTIVE**, **LAGRANGIAN_OBJECTIVE**, **AUGMENTED_LAGRANGIAN_OBJECTIVE** }
- enum { **NO_CONSTRAINTS**, **LINEARIZED_CONSTRAINTS**, **ORIGINAL_CONSTRAINTS** }
- enum { **NO_RELAX**, **HOMOTOPY**, **COMPOSITE_STEP** }
- enum { **PENALTY_MERIT**, **ADAPTIVE_PENALTY_MERIT**, **LAGRANGIAN_MERIT**, **AUGMENTED_LAGRANGIAN_MERIT** }
- enum { **FILTER**, **TR_RATIO** }
- enum { **SCALE_NONE**, **SCALE_VALUE**, **SCALE_LOG** }
- enum { **CDV**, **LINEAR**, **NONLIN**, **FN_LSQ** }
- enum { **DISALLOW**, **TARGET**, **BOUNDS** }
- enum {

  EMPTY, **MERGED_ALL**, **MIXED_ALL**, **MERGED_DISTINCT_DESIGN**,

  MERGED_DISTINCT_UNCERTAIN, **MERGED_DISTINCT_ALEATORY_UNCERTAIN**, **MERGED_DISTINCT_EPISTEMIC_UNCERTAIN**, **MERGED_DISTINCT_STATE**,

  MIXED_DISTINCT_DESIGN, **MIXED_DISTINCT_UNCERTAIN**, **MIXED_DISTINCT_-ALEATORY_UNCERTAIN**, **MIXED_DISTINCT_EPISTEMIC_UNCERTAIN**,

  MIXED_DISTINCT_STATE }
- enum {

  CONTINUOUS_DESIGN, **DISCRETE_DESIGN_RANGE**, **DISCRETE_DESIGN_SET_INT**, **DISCRETE_DESIGN_SET_REAL**,

  NORMAL_UNCERTAIN, **LOGNORMAL_UNCERTAIN**, **UNIFORM_UNCERTAIN**, **LOGUNIFORM_UNCERTAIN**,

  TRIANGULAR_UNCERTAIN, **EXPONENTIAL_UNCERTAIN**, **BETA_UNCERTAIN**, **GAMMA_-UNCERTAIN**,

  GUMBEL_UNCERTAIN, **FRECHET_UNCERTAIN**, **WEIBULL_UNCERTAIN**, **HISTOGRAM_-BIN_UNCERTAIN**,

  POISSON_UNCERTAIN, **BINOMIAL_UNCERTAIN**, **NEGATIVE_BINOMIAL_UNCERTAIN**, **GEOMETRIC_UNCERTAIN**,

HYPERGEOMETRIC_UNCERTAIN, **HISTOGRAM_POINT_UNCERTAIN**, **INTERVAL_-UNCERTAIN**, **CONTINUOUS_STATE**,

DISCRETE_STATE_RANGE, **DISCRETE_STATE_SET_INT**, **DISCRETE_STATE_SET_REAL** }

- enum var_t {

  VAR_x1, **VAR_x2**, **VAR_x3**, **VAR_b**,

  VAR_h, **VAR_P**, **VAR_M**, **VAR_Y**,

  VAR_w, **VAR_t**, **VAR_R**, **VAR_E**,

  VAR_X, **VAR_Fs**, **VAR_P1**, **VAR_P2**,

  VAR_P3, **VAR_B**, **VAR_D**, **VAR_H**,

  VAR_F0, **VAR_d** }

  enumeration of possible variable types (to index to names)

- enum driver_t {

  NO_DRIVER = 0, **CANTILEVER_BEAM**, **MOD_CANTILEVER_BEAM**, **CYLINDER_HEAD**,

  EXTENDED_ROSENBROCK, **GENERALIZED_ROSENBROCK**, **ROSENBROCK**, **LOGNORMAL_RATIO**,

  MULTIMODAL, **PLUGIN_ROSENBROCK**, **PLUGIN_TEXT_BOOK**, **SHORT_COLUMN**,

  SOBOL_RATIONAL, **SOBOL_G_FUNCTION**, **SOBOL_ISHIGAMI**, **STEEL_COLUMN_COST**,

  STEEL_COLUMN_PERFORMANCE, **TEXT_BOOK**, **TEXT_BOOK1**, **TEXT_BOOK2**,

  TEXT_BOOK3, **TEXT_BOOK_OUU**, **SALINAS**, **MODELCENTER**,

  MATLAB, **PYTHON** }

  enumeration of possible driver types (to index to names)

- enum local_data_t { **VARIABLES_MAP** = 1, **VARIABLES_VECTOR** = 2 }

  a bit representation)

- enum {

  sFTW_F, **sFTW_SL**, **sFTW_D**, **sFTW_DP**,

  sFTW_DNR, **sFTW_O**, **sFTW_NS** }
- enum {

  sFTWret_OK, **sFTWret_quit**, **sFTWret_skipdir**, **sFTWret_Follow**,

  sFTWret_mallocfailure }
- enum { **SETUP_MODEL**, **SETUP_USERFUNC** }
- enum {

  CAUVar_normal = 0, **CAUVar_lognormal** = 1, **CAUVar_uniform** = 2, **CAUVar_loguniform** = 3,

  CAUVar_triangular = 4, **CAUVar_exponential** = 5, **CAUVar_beta** = 6, **CAUVar_gamma** = 7,

  CAUVar_gumbel = 8, **CAUVar_frechet** = 9, **CAUVar_weibull** = 10, **CAUVar_histogram_bin** = 11,

  CAUVar_Nkinds = 12 }
- enum {

  DAUIVar_poisson = 0, **DAUIVar_binomial** = 1, **DAUIVar_negative_binomial** = 2, **DAUIVar_-geometric** = 3,

  DAUIVar_hypergeometric = 4, **DAUIVar_Nkinds** = 5 }

- enum { **DAURVar_histogram_point** = 0, **DAURVar_Nkinds** = 1 }
- enum { **CEUVar_interval** = 0, **CEUVar_Nkinds** = 1 }
- enum {

  DiscSetVar_design_set_int = 0, **DiscSetVar_design_set_real** = 1, **DiscSetVar_state_set_int** = 2, **DiscSetVar_state_set_real** = 3,

  DiscSetVar_Nkinds = 4 }
- enum { **N_VLS** = 4 }
- enum { **NO_EMULATOR**, **STOCHASTIC_EXPANSION**, **GAUSSIAN_PROCESS** }
- enum CG_UPDATETYPE {

  CG_STEEPEST, **CG_FLETCHER_REEVES**, **CG_POLAK_RIBIERE**, **CG_POLAK_RIBIERE_PLUS**,

  CG_HESTENES_STIEFEL }

  NonlinearCG update options.

- enum CG_LINESEARCHTYPE { **CG_FIXED_STEP**, **CG_LS_SIMPLE**, **CG_LS_BRENT**, **CG_LS_WOLFE** }

  NonlinearCG linesearch options.

- enum {

  LIST = 1, **VECTOR_SV**, **VECTOR_FP**, **CENTERED**,

  MULTIDIM }
- enum { **ESTIMATE_ORDER** = 1, **CONVERGE_ORDER**, **CONVERGE_QOI** }
- enum EvalType { **NLFEvaluator**, **CONEvaluator** }

  enumeration for the type of evaluator function

- enum {

  TH_SILENT_OUTPUT, **TH_QUIET_OUTPUT**, **TH_NORMAL_OUTPUT**, **TH_VERBOSE_OUTPUT**,

  TH_DEBUG_OUTPUT }

Functions

- static const char * basename (const char *s)

  return name of s, stripped of any leading path information

- static void cleanup_and_abort (const std::string &resname)

  output error message about results file and call abort

- int cast_from_realvector_to_vector (const Any &src, Any &dest)

  Cast from DAKOTA RealVector to std::vector<double>.

- int cast_from_vector_to_realvector (const Any &src, Any &dest)

  Cast from std::vector<double> to DAKOTA RealVector.

- int cast_from_intvector_to_vector (const Any &src, Any &dest)
  Cast from DAKOTA IntVector to std::vector<int>.
- int cast_from_vector_to_intvector (const Any &src, Any &dest)
  Cast from std::vector<int> to DAKOTA IntVector.
- int cast_from_int_to_unsignedint (const Any &src, Any &dest)
  Cast from int to unsigned int.
- int cast_from_unsignedint_to_int (const Any &src, Any &dest)
  Cast for unsigned in to int.
- int cast_from_charconst_to_string (const Any &src, Any &dest)
  Cast from char const∗ to std::string.
- bool register_dakota_cast ()
  Register the cast functions.
- CommandShell & flush (CommandShell &shell)
  convenient shell manipulator function to "flush" the shell
- bool operator== (const ActiveSet &set1, const ActiveSet &set2)
  equality operator
- std::istream & operator>> (std::istream &s, ActiveSet &set)
  std::istream extraction operator for ActiveSet. Calls read(std::istream&).
- std::ostream & operator<< (std::ostream &s, const ActiveSet &set)
  std::ostream insertion operator for ActiveSet. Calls write(std::istream&).
- BiStream & operator>> (BiStream &s, ActiveSet &set)
  BiStream extraction operator for ActiveSet. Calls read(BiStream&).
- BoStream & operator<< (BoStream &s, const ActiveSet &set)
  BoStream insertion operator for ActiveSet. Calls write(BoStream&).
- MPIUnpackBuffer & operator>> (MPIUnpackBuffer &s, ActiveSet &set)
  Calls read(MPIUnpackBuffer&).
- MPIPackBuffer & operator<< (MPIPackBuffer &s, const ActiveSet &set)
  MPIPackBuffer insertion operator for ActiveSet. Calls write(MPIPackBuffer&).
- bool operator!= (const ActiveSet &set1, const ActiveSet &set2)
  inequality operator
- template<class ArrayT> void array_read (ArrayT &v, BiStream &s)

Read an array from BiStream, s.

- template<class ArrayT> void array_write (const ArrayT &v, BoStream &s)

  Write an array to BoStream, s.

- template<class ArrayT> BiStream & operator>> (BiStream &s, ArrayT &data)

  global BiStream extraction operator for generic "array" container

- template<class ArrayT> BoStream & operator<< (BoStream &s, const ArrayT &data)

  global BoStream insertion operator for generic "array" container

- std::istream & operator>> (std::istream &s, Constraints &con)

  std::istream extraction operator for Constraints

- std::ostream & operator<< (std::ostream &s, const Constraints &con)

  std::ostream insertion operator for Constraints

- bool interface_id_compare (const Interface &interface, const void *id)

  global comparison function for Interface

- NIDR_KWlib * **nidr_lib_record** (void *, const char *)
- void * **nidr_dlopen** (const char *)
- static p_vf **Lib_load** (SharedLib *L, int k)
- void **DOT** (int *info, int *ngotoz, int *method, int *iprint, int *ndv, int *ncon, double *x, double *xl, double *xu, double *obj, int *minmax, double *g, double *rprm, int *iprm, double *wk, int *nrwk, int *iwk, int *nriwk)
- void **DOT510** (int *ndv, int *ncon, int *ncola, int *method, int *nrwk, int *nriwk, int *nrb, int *ngmax, double *xl, double *xu)
- void **NPSOL** (int *n, int *nclin, int *ncnln, int *lda, int *ldju, int *ldr, double *a, double *bl, double *bu, p_vf funcon, p_vf funobj, int *inform, int *iter, int *istate, double *c, double *cjacu, double *clamda, double *objf, double *gradu, double *r, double *x, int *iw, int *leniw, double *w, int *lenw)
- void **NLSSOL** (int *m, int *n, int *nclin, int *ncnln, int *lda, int *ldcju, int *ldfju, int *ldr, double *a, double *bl, double *bu, p_vf funcon, p_vf funobj, int *inform, int *iter, int *istate, double *c, double *cjacu, double *y, double *f, double *fjacu, double *clamda, double *objf, double *r, double *x, int *iw, int *leniw, double *w, int *lenw)
- void **NPOPTN2** (char *string, size_t string_len)
- void **NLPQLP** (int *l, int *m, int *me, int *mmax, int *n, int *nmax, int *mnn2, double *x, double *f, double *g, double *df, double *dg, double *u, double *xl, double *xu, double *c, double *d, double *acc, double *accqp, double *stpmin, int *maxfun, int *maxit, int *max_nm, double *tol_nm, int *iprint, int *mode, int *iout, int *ifail, double *wa, int *lwa, int *kwa, int *lkwa, int *active, int *lactiv, int *lql, p_vf qpsolve)
- void **QL** (int *m, int *me, int *mmax, int *n, int *nmax, int *mnn, double *c, double *d, double *a, double *b, double *xl, double *xu, double *x, double *u, double *eps, int *mode, int *iout, int *ifail, int *iprint, double *war, int *lwar, int *iwar, int *liwar)
- static void **not_available** (const char *what)
- static DOTOptimizer * **no_DOT** (Model &model)
- static DOTOptimizer * **no_DOT1** (NoDBBaseConstructor, Model &model)

- static JEGAOptimizer * **no_JEGA** (Model &model)
- static NLPQLPOptimizer * **no_NLPQL** (Model &model)
- static NLPQLPOptimizer * **no_NLPQL1** (NoDBBaseConstructor, Model &model)
- static NPSOLOptimizer * **no_NPSOL** (Model &model)
- static NPSOLOptimizer * **no_NPSOL1** (NoDBBaseConstructor, Model &model)
- static NPSOLOptimizer * **no_NPSOL2** (Model &model, const int &derivative_level, const Real &conv_tol)
- static NPSOLOptimizer * **no_NPSOL3** (const RealVector &initial_point, const RealVector &var_lower_bnds, const RealVector &var_upper_bnds, const RealMatrix &lin_ineq_coeffs, const RealVector &lin_ineq_lower_bnds, const RealVector &lin_ineq_upper_bnds, const RealMatrix &lin_eq_coeffs, const RealVector &lin_eq_targets, const RealVector &nonlin_ineq_lower_bnds, const RealVector &nonlin_ineq_upper_bnds, const RealVector &nonlin_eq_targets, void(*user_obj_eval)(int &, int &, double *, double &, double *, int &), void(*user_con_eval)(int &, int &, int &, int &, int *, double *, double *, double *, int &), const int &derivative_level, const Real &conv_tol)
- static NLSSOLLeastSq * **no_NLSSOL** (Model &model)
- static NLSSOLLeastSq * **no_NLSSOL1** (NoDBBaseConstructor, Model &model)
- bool method_id_compare (const Iterator &iterator, const void *id)

  global comparison function for Iterator

- bool model_id_compare (const Model &model, const void *id)

  global comparison function for Model

- bool operator== (const ResponseRep &rep1, const ResponseRep &rep2)

  equality operator

- bool responses_id_compare (const Response &resp, const void *id)

  global comparison function for Response

- std::istream & operator>> (std::istream &s, Response &response)

  std::istream extraction operator for Response. Calls read(std::istream&).

- std::ostream & operator<< (std::ostream &s, const Response &response)

  std::ostream insertion operator for Response. Calls write(std::ostream&).

- BiStream & operator>> (BiStream &s, Response &response)

  BiStream extraction operator for Response. Calls read(BiStream&).

- BoStream & operator<< (BoStream &s, const Response &response)

  BoStream insertion operator for Response. Calls write(BoStream&).

- MPIUnpackBuffer & operator>> (MPIUnpackBuffer &s, Response &response)

  read(MPIUnpackBuffer&).

- MPIPackBuffer & operator<< (MPIPackBuffer &s, const Response &response)

  MPIPackBuffer insertion operator for Response. Calls write(MPIPackBuffer&).

- bool operator== (const Response &resp1, const Response &resp2)

equality operator

- bool operator!= (const Response &resp1, const Response &resp2)

  inequality operator

- MPIPackBuffer & operator<< (MPIPackBuffer &s, const String &data)

  Reads String from buffer.

- MPIUnpackBuffer & operator>> (MPIUnpackBuffer &s, String &data)

  Writes String to buffer.

- String operator+ (const String &s1, const String &s2)

  Concatenate two Strings and return the resulting String.

- String operator+ (const char *s1, const String &s2)

  Append a String to a char and return the resulting String.*

- String operator+ (const String &s1, const char *s2)

  Append a char to a String and return the resulting String.*

- String operator+ (const std::string &s1, const String &s2)

  Append a String to a std::string and return the resulting String.

- String operator+ (const String &s1, const std::string &s2)

  Append a std::string to a String and return the resulting String.

- String toUpper (const String &str)

  Returns a String converted to upper case. Calls String::upper().

- String toLower (const String &str)

  Returns a String converted to lower case. Calls String::lower().

- bool operator== (const Variables &vars1, const Variables &vars2)

  equality operator

- bool binary_equal_to (const Variables &vars1, const Variables &vars2)

  binary_equal_to (since 'operator==' is not suitable for boost/hash_set)

- std::size_t hash_value (const Variables &vars)

  hash_value

- bool variables_id_compare (const Variables &vars, const void *id)

  global comparison function for Variables

- std::istream & operator>> (std::istream &s, Variables &vars)

  std::istream extraction operator for Variables.

- std::ostream & operator<< (std::ostream &s, const Variables &vars)

  std::ostream insertion operator for Variables.

- BiStream & operator>> (BiStream &s, Variables &vars)

  BiStream extraction operator for Variables.

- BoStream & operator<< (BoStream &s, const Variables &vars)

  BoStream insertion operator for Variables.

- MPIUnpackBuffer & operator>> (MPIUnpackBuffer &s, Variables &vars)

  MPIUnpackBuffer extraction operator for Variables.

- MPIPackBuffer & operator<< (MPIPackBuffer &s, const Variables &vars)

  MPIPackBuffer insertion operator for Variables.

- bool operator!= (const Variables &vars1, const Variables &vars2)

  inequality operator

- template<class T> std::ostream & operator<< (std::ostream &s, const std::set< T > &data)

  global std::ostream insertion operator for std::set

- template<class T> MPIUnpackBuffer & operator>> (MPIUnpackBuffer &s, std::set< T > &data)

  global MPIUnpackBuffer extraction operator for std::set

- template<class T> MPIPackBuffer & operator<< (MPIPackBuffer &s, const std::set< T > &data)

  global MPIPackBuffer insertion operator for std::set

- template<typename OrdinalType, typename ScalarType> MPIPackBuffer & operator<< (MPIPackBuffer &s, const Teuchos::SerialDenseVector< OrdinalType, ScalarType > &data)

  global MPIPackBuffer insertion operator for Teuchos::SerialDenseVector

- template<typename OrdinalType, typename ScalarType> MPIPackBuffer & operator<< (MPIPackBuffer &s, const Teuchos::SerialDenseMatrix< OrdinalType, ScalarType > &data)

  global MPIPackBuffer insertion operator for Teuchos::SerialDenseMatrix

- template<typename OrdinalType, typename ScalarType> MPIPackBuffer & operator<< (MPIPackBuffer &s, const Teuchos::SerialSymDenseMatrix< OrdinalType, ScalarType > &data)

  global MPIPackBuffer insertion operator for Teuchos::SerialSymDenseMatrix

- template<typename OrdinalType, typename ScalarType> MPIUnpackBuffer & operator>> (MPIUnpack-Buffer &s, Teuchos::SerialDenseVector< OrdinalType, ScalarType > &data)

  global MPIUnpackBuffer extraction operator for Teuchos::SerialDenseVector

- template<typename OrdinalType, typename ScalarType> MPIUnpackBuffer & operator>> (MPIUnpack-Buffer &s, Teuchos::SerialDenseMatrix< OrdinalType, ScalarType > &data)

global MPIUnpackBuffer extraction operator for Teuchos::SerialDenseMatrix

- template<typename OrdinalType, typename ScalarType> MPIUnpackBuffer & operator>> (MPIUnpackBuffer &s, Teuchos::SerialSymDenseMatrix< OrdinalType, ScalarType > &data)

  global MPIUnpackBuffer extraction operator for Teuchos::SerialSymDenseMatrix

- template<typename OrdinalType, typename ScalarType> void read_data (std::istream &s, Teuchos::SerialDenseVector< OrdinalType, ScalarType > &v)

  standard istream extraction operator for full SerialDenseVector

- template<typename OrdinalType, typename ScalarType> void read_data (std::istream &s, Teuchos::SerialDenseVector< OrdinalType, ScalarType > &v, StringMultiArray &label_array)

  standard istream extraction operator for full SerialDenseVector with labels

- template<typename OrdinalType, typename ScalarType> void read_data (std::istream &s, Teuchos::SerialDenseVector< OrdinalType, ScalarType > &v, StringMultiArrayView label_array)

  standard istream extraction operator for full SerialDenseVector with labels

- template<typename OrdinalType, typename ScalarType> void read_data_partial (std::istream &s, size_t start_index, size_t num_items, Teuchos::SerialDenseVector< OrdinalType, ScalarType > &v)

  standard istream extraction operator for partial SerialDenseVector

- template<typename OrdinalType, typename ScalarType> void read_data_partial (std::istream &s, size_t start_index, size_t num_items, Teuchos::SerialDenseVector< OrdinalType, ScalarType > &v, StringMultiArray &label_array)

  with labels

- template<typename OrdinalType, typename ScalarType> void read_data_partial (std::istream &s, size_t start_index, size_t num_items, Teuchos::SerialDenseVector< OrdinalType, ScalarType > &v, StringMultiArrayView label_array)

  with labels

- template<typename OrdinalType, typename ScalarType> void read_data_tabular (std::istream &s, Teuchos::SerialDenseVector< OrdinalType, ScalarType > &v)

  tabular istream extraction operator for full SerialDenseVector

- template<typename OrdinalType, typename ScalarType> void read_data_partial_tabular (std::istream &s, size_t start_index, size_t num_items, Teuchos::SerialDenseVector< OrdinalType, ScalarType > &v)

  tabular istream extraction operator for partial SerialDenseVector

- template<typename OrdinalType, typename ScalarType> void read_data_annotated (std::istream &s, Teuchos::SerialDenseVector< OrdinalType, ScalarType > &v, StringMultiArray &label_array)

  annotated istream extraction operator for full SerialDenseVector with labels

- template<typename OrdinalType, typename ScalarType> void read_data_annotated (std::istream &s, Teuchos::SerialDenseVector< OrdinalType, ScalarType > &v, StringMultiArrayView label_array)

annotated istream extraction operator for full SerialDenseVector with labels

- template<typename OrdinalType, typename ScalarType> void write_data (std::ostream &s, const ScalarType *v, OrdinalType len)

  standard ostream insertion operator for full SerialDenseVector

- template<typename OrdinalType, typename ScalarType> void write_data (std::ostream &s, const Teuchos::SerialDenseVector< OrdinalType, ScalarType > &v)

  standard ostream insertion operator for full SerialDenseVector

- template<typename OrdinalType, typename ScalarType> void write_data (std::ostream &s, const Teuchos::SerialDenseVector< OrdinalType, ScalarType > &v, const StringMultiArray &label_array)

  standard ostream insertion operator for full SerialDenseVector with labels

- template<typename OrdinalType, typename ScalarType> void write_data (std::ostream &s, const Teuchos::SerialDenseVector< OrdinalType, ScalarType > &v, StringMultiArrayConstView &label_array)

  standard ostream insertion operator for full SerialDenseVector with labels

- template<typename OrdinalType, typename ScalarType> void write_data (std::ostream &s, const Teuchos::SerialDenseVector< OrdinalType, ScalarType > &v, const StringArray &label_array)

  with alternate labels

- template<typename OrdinalType, typename ScalarType> void write_data_aprepro (std::ostream &s, const Teuchos::SerialDenseVector< OrdinalType, ScalarType > &v, const StringMultiArray &label_array)

  aprepro ostream insertion operator for full SerialDenseVector with labels

- template<typename OrdinalType, typename ScalarType> void write_data_partial (std::ostream &s, size_t start_index, size_t num_items, const Teuchos::SerialDenseVector< OrdinalType, ScalarType > &v)

  standard ostream insertion operator for partial SerialDenseVector

- template<typename OrdinalType, typename ScalarType> void write_data_partial (std::ostream &s, size_t start_index, size_t num_items, const Teuchos::SerialDenseVector< OrdinalType, ScalarType > &v, const StringMultiArray &label_array)

  with labels

- template<typename OrdinalType, typename ScalarType> void write_data_partial_aprepro (std::ostream &s, size_t start_index, size_t num_items, const Teuchos::SerialDenseVector< OrdinalType, ScalarType > &v, const StringMultiArray &label_array)

  aprepro ostream insertion operator for partial SerialDenseVector with labels

- template<typename OrdinalType, typename ScalarType> void write_data_annotated (std::ostream &s, const Teuchos::SerialDenseVector< OrdinalType, ScalarType > &v, const StringMultiArray &label_array)

  annotated ostream insertion operator for full SerialDenseVector with labels

- template<typename OrdinalType, typename ScalarType> void write_data_tabular (std::ostream &s, const Teuchos::SerialDenseVector< OrdinalType, ScalarType > &v)

tabular ostream insertion operator for full SerialDenseVector

- template<typename OrdinalType, typename ScalarType> void write_data_partial_tabular (std::ostream &s, size_t start_index, size_t num_items, const Teuchos::SerialDenseVector< OrdinalType, ScalarType > &v)

  tabular ostream insertion operator for partial SerialDenseVector

- void write_data_tabular (std::ostream &s, StringMultiArrayConstView ma)

  tabular ostream insertion operator for view of StringMultiArray

- template<typename OrdinalType, typename ScalarType> std::istream & operator>> (std::istream &s, Teuchos::SerialDenseVector< OrdinalType, ScalarType > &data)

  global std::istream extraction operator for SerialDenseVector

- template<typename OrdinalType, typename ScalarType> std::ostream & operator<< (std::ostream &s, const Teuchos::SerialDenseVector< OrdinalType, ScalarType > &data)

  global std::ostream insertion operator for SerialDenseVector

- template<typename OrdinalType, typename ScalarType> void read_data (BiStream &s, Teuchos::SerialDenseVector< OrdinalType, ScalarType > &v, StringMultiArray &label_array)

  SerialDenseVector with labels.

- template<typename OrdinalType, typename ScalarType> void read_data (BiStream &s, Teuchos::SerialDenseVector< OrdinalType, ScalarType > &v, StringMultiArrayView label_array)

  SerialDenseVector with labels.

- template<typename OrdinalType, typename ScalarType> void write_data (BoStream &s, const Teuchos::SerialDenseVector< OrdinalType, ScalarType > &v, const StringMultiArray &label_array)

  SerialDenseVector with labels.

- template<typename OrdinalType, typename ScalarType> void read_data (MPIUnpackBuffer &s, Teuchos::SerialDenseVector< OrdinalType, ScalarType > &v, StringMultiArray &label_array)

  with labels

- template<typename OrdinalType, typename ScalarType> void read_data (MPIUnpackBuffer &s, Teuchos::SerialDenseVector< OrdinalType, ScalarType > &v, StringMultiArrayView label_array)

  with labels

- template<typename OrdinalType, typename ScalarType> void write_data (MPIPackBuffer &s, const Teuchos::SerialDenseVector< OrdinalType, ScalarType > &v, const StringMultiArray &label_array)

  with labels

- template<typename OrdinalType, typename ScalarType> void read_data (std::istream &s, std::vector< Teuchos::SerialDenseVector< OrdinalType, ScalarType > > &va)

  standard istream extraction operator for std::vector of SerialDenseVectors

- template<typename OrdinalType, typename ScalarType> void read_data (std::istream &s, Teuchos::SerialSymDenseMatrix< OrdinalType, ScalarType > &m)

  standard istream extraction operator for SerialSymDenseMatrix

- template<typename OrdinalType, typename ScalarType> void read_data (BiStream &s, Teuchos::SerialSymDenseMatrix< OrdinalType, ScalarType > &m)

  standard binary stream extraction operator for SerialSymDenseMatrix

- template<typename OrdinalType, typename ScalarType> void read_data (MPIUnpackBuffer &s, Teuchos::SerialSymDenseMatrix< OrdinalType, ScalarType > &m)

  standard MPI buffer extraction operator for SerialSymDenseMatrix

- template<typename OrdinalType, typename ScalarType> void write_data (std::ostream &s, const Teuchos::SerialSymDenseMatrix< OrdinalType, ScalarType > &m, bool brackets, bool row_rtn, bool final_rtn)

  formatted ostream insertion operator for SerialSymDenseMatrix

- template<typename OrdinalType, typename ScalarType> void write_data (BoStream &s, const Teuchos::SerialSymDenseMatrix< OrdinalType, ScalarType > &m)

  standard binary stream insertion operator for SerialSymDenseMatrix

- template<typename OrdinalType, typename ScalarType> void write_data (MPIPackBuffer &s, const Teuchos::SerialSymDenseMatrix< OrdinalType, ScalarType > &m)

  standard MPI buffer insertion operator for SerialSymDenseMatrix

- template<typename OrdinalType, typename ScalarType> void write_data (std::ostream &s, const Teuchos::SerialDenseMatrix< OrdinalType, ScalarType > &m, bool brackets, bool row_rtn, bool final_rtn)

  formatted ostream insertion operator for SerialSymDenseMatrix

- template<typename OrdinalType, typename ScalarType> void write_col_vector_trans (std::ostream &s, OrdinalType col, OrdinalType num_items, bool brackets, bool break_line, bool final_rtn, const Teuchos::SerialDenseMatrix< OrdinalType, ScalarType > &sdm)

  standard MPI buffer insertion operator for SerialSymDenseMatrix

- template<typename OrdinalType, typename ScalarType> void write_col_vector_trans (std::ostream &s, OrdinalType col, bool brackets, bool break_line, bool final_rtn, const Teuchos::SerialDenseMatrix< OrdinalType, ScalarType > &sdm)

  ostream insertion operator for a column vector from a SerialDenseMatrix

- template<typename OStreamType, typename OrdinalType, typename ScalarType> void write_col_vector_trans (OStreamType &s, OrdinalType col, OrdinalType num_items, const Teuchos::SerialDenseMatrix< OrdinalType, ScalarType > &sdm)

  ostream insertion operator for a column vector from a SerialDenseMatrix

- template<typename OStreamType, typename OrdinalType, typename ScalarType> void write_col_vector_trans (OStreamType &s, OrdinalType col, const Teuchos::SerialDenseMatrix< OrdinalType, ScalarType > &sdm)

ostream insertion operator for a column vector from a SerialDenseMatrix

- template<typename IStreamType, typename OrdinalType, typename ScalarType> void read_col_vector_-trans (IStreamType &s, OrdinalType col, Teuchos::SerialDenseMatrix< OrdinalType, ScalarType > &sdm)

  istream extraction operator for a column vector from a SerialDenseMatrix

- template<class ArrayT> void array_read (ArrayT &v, std::istream &s)

  read array from std::istream

- template<class ArrayT> void array_write (const ArrayT &v, std::ostream &s)

  write array to std::ostream

- template<class ListT> void list_write (const ListT &l, std::ostream &s)

  write list to std::ostream

- template<class T> std::istream & operator>> (std::istream &s, std::vector< T > &data)

  global std::istream extraction operator for std::vector

- template<class T> std::ostream & operator<< (std::ostream &s, const std::vector< T > &data)

  global std::ostream insertion operator for std::vector

- template<class T> std::ostream & operator<< (std::ostream &s, const std::list< T > &data)

  global std::ostream insertion operator for std::list

- template<class ArrayT> void array_write (std::ostream &s, const ArrayT &v, const std::vector< String > &label_array)

  write array to std::ostream with labels

- template<class ArrayT> void array_write_aprepro (std::ostream &s, const ArrayT &v, const std::vector< String > &label_array)

  write array to std::ostream (APREPRO format)

- template<class ArrayT> void array_write_annotated (const ArrayT &v, std::ostream &s, bool write_len)

  write_len = true

- bool operator== (const ShortArray &dsa1, const ShortArray &dsa2)

  equality operator for ShortArray

- bool operator== (const StringArray &dsa1, const StringArray &dsa2)

  equality operator for StringArray

- bool operator== (const SizetArray &sa, SizetMultiArrayConstView smav)

  equality operator for SizetArray and SizetMultiArrayConstView

- void copy_data (const RealSymMatrix &rsdm, NEWMAT::SymmetricMatrix &sm)

copy RealSymMatrix to NEWMAT::SymmetricMatrix

- void copy_data (const RealMatrix &rdm, NEWMAT::Matrix &m)
  copy RealMatrix to NEWMAT::Matrix
- void copy_data (const NEWMAT::ColumnVector &cv, RealVector &rdv)
  copy NEWMAT::ColumnVector to RealVector
- void copy_data (const Real ∗rdv, const int num_items, NEWMAT::ColumnVector &cv)
  copy Real∗ (column of Teuchos_SerialDenseMatrix) to NEWMAT::ColumnVector
- void copy_data (const RealVector &rdv, NEWMAT::ColumnVector &cv)
  copy RealVector to NEWMAT::ColumnVector
- void copy_data (const DDaceSamplePoint &dsp, RealVector &rdv)
  copy DDACE point to RealVector
- void copy_data (const std::vector< DDaceSamplePoint > &dspa, RealVectorArray &rdva)
  copy DDACE point array to RealVectorArray
- void copy_data (const std::vector< DDaceSamplePoint > &dspa, Real ∗ptr, const int ptr_len)
  copy DDACE point array to Real∗
- bool operator== (const IntArray &dia1, const IntArray &dia2)
  equality operator for IntArray
- bool operator!= (const IntArray &dia1, const IntArray &dia2)
  inequality operator for IntArray
- bool operator!= (const ShortArray &dsa1, const ShortArray &dsa2)
  inequality operator for ShortArray
- bool operator!= (const StringArray &dsa1, const StringArray &dsa2)
  inequality operator for StringArray
- bool operator!= (const SizetArray &sa, SizetMultiArrayConstView smav)
  inequality operator for StringArray
- void build_label (String &label, const String &root_label, size_t tag)
  create a label by appending a numerical tag to the root_label
- void build_labels (StringArray &label_array, const String &root_label)
  label_array. Uses build_label().
- void build_labels (StringMultiArray &label_array, const String &root_label)
  label_array. Uses build_label().

- void build_labels_partial (StringArray &label_array, const String &root_label, size_t start_index, size_t num_items)

  of entries in label_array. Uses build_label().

- void copy_row_vector (const RealMatrix &m, RealMatrix::ordinalType i, std::vector< Real > &row)

  Copies a row of a Teuchos_SerialDenseMatrix<int,Real> to std::vector<Real>.

- template<class T> void copy_data (const std::vector< T > &dbv, T *ptr, const int ptr_len)

  *copy Array<T> to T**

- template<typename OrdinalType, typename ScalarType> void copy_data (const std::vector< Teuchos::SerialDenseVector< OrdinalType, ScalarType > > &sdva, ScalarType *ptr, const OrdinalType ptr_len, const String &ptr_type)

  *copy Array<Teuchos::SerialDenseVector<OT,ST> > to ST**

- template<typename OrdinalType, typename ScalarType> void copy_data (const Teuchos::SerialDenseVector< OrdinalType, ScalarType > &sdv, Teuchos::SerialDenseMatrix< OrdinalType, ScalarType > &sdm, OrdinalType nr, OrdinalType nc)

  copy Teuchos::SerialDenseVector<OT,ST> to Teuchos::SerialDenseMatrix<OT,ST>

- template<class T> void copy_data (const std::list< T > &dl, std::vector< T > &da)

  copy std::list<T> to std::vector<T>

- template<class T> void copy_data (const std::list< T > &dl, std::vector< std::vector< T > > &d2a, size_t num_a, size_t a_len)

  copy std::list<T> to std::vector<std::vector<T> >

- template<class T> void copy_data (const std::vector< std::vector< T > > &d2a, std::vector< T > &da)

  copy std::vector<vector<T> > to std::vector<T>(unroll vecOfvecs into vector)

- template<class T> void copy_data (const std::map< int, T > &im, std::vector< T > &da)

  copy map<int, T> to std::vector<T> (discard integer keys)

- template<typename OrdinalType, typename ScalarType> void copy_data (const Teuchos::SerialDenseVector< OrdinalType, ScalarType > &sdv1, Teuchos::SerialDenseVector< OrdinalType, ScalarType > &sdv2)

  (used in place of operator= when a deep copy of a vector view is needed)

- template<typename OrdinalType, typename ScalarType> void copy_data (const Teuchos::SerialDenseVector< OrdinalType, ScalarType > &sdv, std::vector< ScalarType > &da)

  std::vector<ScalarType>

- template<typename OrdinalType, typename ScalarType> void copy_data (const std::vector< ScalarType > &da, Teuchos::SerialDenseVector< OrdinalType, ScalarType > &sdv)

  Teuchos::SerialDenseVector<OrdinalType, ScalarType>.

- template<typename OrdinalType, typename ScalarType> void copy_data (const ScalarType *ptr, const OrdinalType ptr_len, Teuchos::SerialDenseVector< OrdinalType, ScalarType > &sdv)

  copy ScalarType to Teuchos::SerialDenseVector<OrdinalType, ScalarType>*

- template<typename OrdinalType, typename ScalarType> void copy_data (const Teuchos::SerialDenseVector< OrdinalType, ScalarType > &sdv, ScalarType *ptr, const OrdinalType ptr_len)

  copy ScalarType to Teuchos::SerialDenseVector<OrdinalType, ScalarType>*

- template<typename OrdinalType, typename ScalarType> void copy_data (const Teuchos::SerialDenseVector< OrdinalType, ScalarType > &sdv, std::vector< Teuchos::SerialDenseVector< OrdinalType, ScalarType > > &sdva, OrdinalType num_vec, OrdinalType vec_len)

  copy SerialDenseVector<> to Array<SerialDenseVector<> >

- template<typename OrdinalType, typename ScalarType> void copy_data_partial (const Teuchos::SerialDenseVector< OrdinalType, ScalarType > &sdv1, OrdinalType start_index1, OrdinalType num_items, Teuchos::SerialDenseVector< OrdinalType, ScalarType > &sdv2)

  copy portion of first SerialDenseVector to all of second SerialDenseVector

- template<typename OrdinalType, typename ScalarType> void copy_data_partial (const Teuchos::SerialDenseVector< OrdinalType, ScalarType > &sdv1, Teuchos::SerialDenseVector< OrdinalType, ScalarType > &sdv2, OrdinalType start_index2)

  copy all of first SerialDenseVector to portion of second SerialDenseVector

- template<typename OrdinalType, typename ScalarType> void copy_data_partial (const Teuchos::SerialDenseVector< OrdinalType, ScalarType > &sdv1, OrdinalType start_index1, OrdinalType num_items, Teuchos::SerialDenseVector< OrdinalType, ScalarType > &sdv2, OrdinalType start_index2)

  SerialDenseVector.

- template<class T> void copy_data_partial (const std::vector< T > &da1, size_t start_index1, size_t num_items, std::vector< T > &da2)

  copy portion of first Array<T> to all of second Array<T>

- template<class T> void copy_data_partial (const std::vector< T > &da1, std::vector< T > &da2, size_t start_index2)

  copy all of first Array<T> to portion of second Array<T>

- template<class T> void copy_data_partial (const std::vector< T > &da, boost::multi_array< T, 1 > &bma, size_t start_index_bma)

  copy all of first Array<T> to portion of boost::multi_array<T, 1>

- template<class T> void copy_data_partial (const std::vector< T > &da1, size_t start_index1, size_t num_items, std::vector< T > &da2, size_t start_index2)

  copy portion of first Array<T> to portion of second Array<T>

- void merge_data_partial (const IntVector &d_array, RealVector &m_array, size_t start_index_ma)

  aggregate continuous and discrete arrays into a single merged array

- template<typename OrdinalType, typename ScalarType> const ScalarType & set_index_to_value (OrdinalType index, const std::set< ScalarType > &values)

  retrieve the set value corresponding to the passed index

- template<typename ScalarType> size_t set_value_to_index (const ScalarType &value, const std::set< ScalarType > &values)

  calculate the set index corresponding to the passed value

- template<typename OrdinalType, typename ScalarType> void x_y_pairs_to_x_set (const Teuchos::SerialDenseVector< OrdinalType, ScalarType > &xy_pairs, std::set< ScalarType > &x_set)

  std::set of (x), discarding the y values

- template<typename MultiArrayType, typename DataType> size_t **find_index** (const MultiArrayType &a, const DataType &search_data)
- template<typename MultiArrayType, typename DakArrayType> void **copy_data** (const MultiArrayType &ma, DakArrayType &da)
- template<class T> size_t find_index (const boost::multi_array< T, 1 > &bma, const T &search_data)

  compute the index of an entry within a boost::multi_array

- size_t find_index (SizetMultiArrayConstView bmacv, size_t search_data)

  compute the index of an entry within a boost::multi_array view

- size_t find_index (StringMultiArrayConstView bmacv, const String &search_data)

  compute the index of an entry within a boost::multi_array view

- template<class ListT> ListT::size_type find_index (const ListT &l, const typename ListT::value_type &val)

  compute the index of an entry within a std::list

- void copy_data (SizetMultiArrayConstView ma, SizetArray &da)

  copy boost::multi_array view to Array

- void copy_data (StringMultiArrayConstView ma, StringArray &da)

  copy boost::multi_array view to Array

- template<typename DakContainerType> bool contains (const DakContainerType &v, const typename DakContainerType::value_type &val)

  return true if the item val appears in container v

- template<class ListT> ListT::size_type count_if (const ListT &l, bool(∗test_fn)(const typename ListT::value_type &, const std::string &), const std::string &test_fn_data)

  test_fn w.r.t. the passed test_fn_data

- template<class ListT> ListT::const_iterator find_if (const ListT &c, bool(∗test_fn)(const typename ListT::value_type &, const std::string &), const std::string &test_fn_data)

  predicate test_fn w.r.t. the passed test_fn_data; end if not found

- MPIPackBuffer & operator<< (MPIPackBuffer &s, const DataInterface &data)
  MPIPackBuffer insertion operator for DataInterface.
- MPIUnpackBuffer & operator>> (MPIUnpackBuffer &s, DataInterface &data)
  MPIUnpackBuffer extraction operator for DataInterface.
- std::ostream & operator<< (std::ostream &s, const DataInterface &data)
  std::ostream insertion operator for DataInterface
- MPIPackBuffer & operator<< (MPIPackBuffer &s, const DataMethod &data)
  MPIPackBuffer insertion operator for DataMethod.
- MPIUnpackBuffer & operator>> (MPIUnpackBuffer &s, DataMethod &data)
  MPIUnpackBuffer extraction operator for DataMethod.
- std::ostream & operator<< (std::ostream &s, const DataMethod &data)
  std::ostream insertion operator for DataMethod
- MPIPackBuffer & operator<< (MPIPackBuffer &s, const DataModel &data)
  MPIPackBuffer insertion operator for DataModel.
- MPIUnpackBuffer & operator>> (MPIUnpackBuffer &s, DataModel &data)
  MPIUnpackBuffer extraction operator for DataModel.
- std::ostream & operator<< (std::ostream &s, const DataModel &data)
  std::ostream insertion operator for DataModel
- MPIPackBuffer & operator<< (MPIPackBuffer &s, const DataResponses &data)
  MPIPackBuffer insertion operator for DataResponses.
- MPIUnpackBuffer & operator>> (MPIUnpackBuffer &s, DataResponses &data)
  MPIUnpackBuffer extraction operator for DataResponses.
- std::ostream & operator<< (std::ostream &s, const DataResponses &data)
  std::ostream insertion operator for DataResponses
- MPIPackBuffer & operator<< (MPIPackBuffer &s, const DataStrategy &data)
  MPIPackBuffer insertion operator for DataStrategy.
- MPIUnpackBuffer & operator>> (MPIUnpackBuffer &s, DataStrategy &data)
  MPIUnpackBuffer extraction operator for DataStrategy.
- std::ostream & operator<< (std::ostream &s, const DataStrategy &data)
  std::ostream insertion operator for DataStrategy
- MPIPackBuffer & operator<< (MPIPackBuffer &s, const DataVariables &data)

MPIPackBuffer insertion operator for DataVariables.

- MPIUnpackBuffer & operator>> (MPIUnpackBuffer &s, DataVariables &data)

  MPIUnpackBuffer extraction operator for DataVariables.

- std::ostream & operator<< (std::ostream &s, const DataVariables &data)

  std::ostream insertion operator for DataVariables

- int salinas_main (int argc, char *argv[ ], MPI_Comm *comm)

  subroutine interface to SALINAS simulation code

- int **dlsolver_option** (Opt_Info *)
- void abort_handler (int code)

  global function which handles serial or parallel aborts

- RealVector const * **continuous_lower_bounds** (Optimizer1 *o)
- RealVector const * **continuous_upper_bounds** (Optimizer1 *o)
- RealVector const * **nonlinear_ineq_constraint_lower_bounds** (Optimizer1 *o)
- RealVector const * **nonlinear_ineq_constraint_upper_bounds** (Optimizer1 *o)
- RealVector const * **nonlinear_eq_constraint_targets** (Optimizer1 *o)
- RealVector const * **linear_ineq_constraint_lower_bounds** (Optimizer1 *o)
- RealVector const * **linear_ineq_constraint_upper_bounds** (Optimizer1 *o)
- RealVector const * **linear_eq_constraint_targets** (Optimizer1 *o)
- RealMatrix const * **linear_ineq_constraint_coeffs** (Optimizer1 *o)
- RealMatrix const * **linear_eq_constraint_coeffs** (Optimizer1 *o)
- void **ComputeResponses** (Optimizer1 *o, int mode, int n, double *x)
- void **GetFuncs** (Optimizer1 *o, int m0, int m1, double *f)
- void **GetGrads** (Optimizer1 *o, int m0, int m1, int n, int is, int js, double *g)
- void **GetContVars** (Optimizer1 *o, int n, double *x)
- void **SetBestContVars** (Optimizer1 *o, int n, double *x)
- void **SetBestRespFns** (Optimizer1 *o, int n, double *x)
- void * **dl_constructor** (Optimizer1 *, Dakota_funcs *, dl_find_optimum_t *, dl_destructor_t *)
- static RealVector const * **continuous_lower_bounds1** (Optimizer1 *o)
- static RealVector const * **continuous_upper_bounds1** (Optimizer1 *o)
- static RealVector const * **nonlinear_ineq_constraint_lower_bounds1** (Optimizer1 *o)
- static RealVector const * **nonlinear_ineq_constraint_upper_bounds1** (Optimizer1 *o)
- static RealVector const * **nonlinear_eq_constraint_targets1** (Optimizer1 *o)
- static RealVector const * **linear_ineq_constraint_lower_bounds1** (Optimizer1 *o)
- static RealVector const * **linear_ineq_constraint_upper_bounds1** (Optimizer1 *o)
- static RealVector const * **linear_eq_constraint_targets1** (Optimizer1 *o)
- static RealMatrix const * **linear_eq_constraint_coeffs1** (Optimizer1 *o)
- static RealMatrix const * **linear_ineq_constraint_coeffs1** (Optimizer1 *o)
- static void **ComputeResponses1** (Optimizer1 *o, int mode, int n, double *x)
- static void **GetFuncs1** (Optimizer1 *o, int m0, int m1, double *f)
- static void **GetGrads1** (Optimizer1 *o, int m0, int m1, int n, int is, int js, double *g)
- static void **GetContVars1** (Optimizer1 *o, int n, double *x)

- static void **SetBestContVars1** (Optimizer1 ∗o, int n, double ∗x)
- static void **SetBestDiscVars1** (Optimizer1 ∗o, int n, int ∗x)
- static void **SetBestRespFns1** (Optimizer1 ∗o, int n, double ∗x)
- static double **Get_Real1** (Optimizer1 ∗o, const char ∗name)
- static int **Get_Int1** (Optimizer1 ∗o, const char ∗name)
- static bool **Get_Bool1** (Optimizer1 ∗o, const char ∗name)
- static void **find_token** (const char ∗s0, const char ∗∗s1, const char ∗∗s2, const char ∗∗s3)
- const char ∗∗ **arg_list_adjust** (const char ∗∗arg_list, void ∗∗a0)
- static std::string **get_dakpath** ()
- int **not_executable** (const char ∗dname, const char ∗tdir)
- void **dak_sigcatch** (int sig)
- void start_dakota_heartbeat (int seconds)
- static int **usage** (int rc)
- int **main** (int argc, char ∗∗argv)
- int **sftw** (const char ∗name, int(∗fn)(const char ∗file, const struct stat ∗, int ftype, int depth, void ∗v), void ∗v)
- static int **ftw1** (char ∗name, size_t namelen, size_t namemaxlen, ftw_fn fn, int, void ∗v)
- static int **compar** (const void ∗a, const void ∗b)
- static int **dodir** (DIR ∗dir, char ∗name, size_t namelen, size_t namemaxlen, ftw_fn fn, int depth, void ∗v, struct stat ∗sb)
- int **sftw** (const char ∗name, ftw_fn fn, void ∗v)
- static int **Symlink** (const char ∗from, const char ∗to)
- static int **my_recrm** (const char ∗file, const struct stat ∗sb, int ftype, int depth, void ∗v)
- int **rec_rmdir** (const char ∗name)
- static void **buf_incr** (Buf ∗b, size_t Lt)
- static int **my_cp** (const char ∗file, const struct stat ∗sb, int ftype, int depth, void ∗v)
- int **rec_cp** (const char ∗from, const char ∗todir, int copy, int flatten, int replace)
- static char ∗ **pathsimp** (char ∗t0)
- static char ∗ **Malloc** (size_t L)
- static void **get_npath** (int appdrive, char ∗∗pnpath)
- void **workdir_adjust** (const char ∗workdir)
- void **workdir_reset** ()
- void **wd_reset** ()
- static const char ∗∗ **arg_adjust** (bool cmd_line_args, std::vector< std::string > &args, const char ∗∗av, const char ∗s)
- static HANDLE ∗ **wait_setup** (std::map< pid_t, int > ∗M, size_t ∗pn)
- static int **wait_for_one** (size_t n, HANDLE ∗h, int req1, size_t ∗pi)
- static void **pid_botch** ()
- template<class ListT> void **removeAt** (ListT &l, typename ListT::size_type index)
- Real getdist (const RealVector &x1, const RealVector &x2)
- Real mindist (const RealVector &x, const RealMatrix &xset, int except)
- Real mindistindx (const RealVector &x, const RealMatrix &xset, const IntArray &indx)
- Real getRmax (const RealMatrix &xset)
- template<typename T> T abort_handler_t (int code)
- int start_grid_computing (char ∗analysis_driver_script, char ∗params_file, char ∗results_file)
- int stop_grid_computing ()

- int perform_analysis (char *iteration_num)
- template<typename T> string asstring (const T &val)

  Creates a string from the argument val *using an ostringstream.*

- void run_dakota_data ()

  mode 2: direct Data class instantiation.

- void run_dakota_data ()

  mode 2: direct Data class instantiation.

- **PACKBUF** (int, MPI_INT)
- **UNPACKBUF** (int, MPI_INT)
- **PACKSIZE** (int, MPI_INT)
- MPIPackBuffer & operator<< (MPIPackBuffer &buff, const int &data)

  insert an int

- MPIPackBuffer & operator<< (MPIPackBuffer &buff, const u_int &data)

  insert a u_int

- MPIPackBuffer & operator<< (MPIPackBuffer &buff, const long &data)

  insert a long

- MPIPackBuffer & operator<< (MPIPackBuffer &buff, const u_long &data)

  insert a u_long

- MPIPackBuffer & operator<< (MPIPackBuffer &buff, const short &data)

  insert a short

- MPIPackBuffer & operator<< (MPIPackBuffer &buff, const u_short &data)

  insert a u_short

- MPIPackBuffer & operator<< (MPIPackBuffer &buff, const char &data)

  insert a char

- MPIPackBuffer & operator<< (MPIPackBuffer &buff, const u_char &data)

  insert a u_char

- MPIPackBuffer & operator<< (MPIPackBuffer &buff, const double &data)

  insert a double

- MPIPackBuffer & operator<< (MPIPackBuffer &buff, const float &data)

  insert a float

- MPIPackBuffer & operator<< (MPIPackBuffer &buff, const bool &data)

  insert a bool

- MPIUnpackBuffer & operator>> (MPIUnpackBuffer &buff, int &data)

  extract an int

- MPIUnpackBuffer & operator>> (MPIUnpackBuffer &buff, u_int &data)

  extract a u_int

- MPIUnpackBuffer & operator>> (MPIUnpackBuffer &buff, long &data)

  extract a long

- MPIUnpackBuffer & operator>> (MPIUnpackBuffer &buff, u_long &data)

  extract a u_long

- MPIUnpackBuffer & operator>> (MPIUnpackBuffer &buff, short &data)

  extract a short

- MPIUnpackBuffer & operator>> (MPIUnpackBuffer &buff, u_short &data)

  extract a u_short

- MPIUnpackBuffer & operator>> (MPIUnpackBuffer &buff, char &data)

  extract a char

- MPIUnpackBuffer & operator>> (MPIUnpackBuffer &buff, u_char &data)

  extract a u_char

- MPIUnpackBuffer & operator>> (MPIUnpackBuffer &buff, double &data)

  extract a double

- MPIUnpackBuffer & operator>> (MPIUnpackBuffer &buff, float &data)

  extract a float

- MPIUnpackBuffer & operator>> (MPIUnpackBuffer &buff, bool &data)

  extract a bool

- template<class ContainerT> void container_read (ContainerT &c, MPIUnpackBuffer &s)

  Read a generic container (vector<T>, list<T>) from MPIUnpackBuffer, s.

- template<class ContainerT> void container_write (const ContainerT &c, MPIPackBuffer &s)

  Write a generic container to MPIPackBuffer, s.

- template<class ContainerT> MPIUnpackBuffer & operator>> (MPIUnpackBuffer &s, ContainerT &data)

  global MPIUnpackBuffer extraction operator for generic container

- template<class ContainerT> MPIPackBuffer & operator<< (MPIPackBuffer &s, const ContainerT &data)

  global MPIPackBuffer insertion operator for generic container

- int MPIPackSize (const int &data, const int num=1)
  return packed size of an int
- int MPIPackSize (const u_int &data, const int num=1)
  return packed size of a u_int
- int MPIPackSize (const long &data, const int num=1)
  return packed size of a long
- int MPIPackSize (const u_long &data, const int num=1)
  return packed size of a u_long
- int MPIPackSize (const short &data, const int num=1)
  return packed size of a short
- int MPIPackSize (const u_short &data, const int num=1)
  return packed size of a u_short
- int MPIPackSize (const char &data, const int num=1)
  return packed size of a char
- int MPIPackSize (const u_char &data, const int num=1)
  return packed size of a u_char
- int MPIPackSize (const double &data, const int num=1)
  return packed size of a double
- int MPIPackSize (const float &data, const int num=1)
  return packed size of a float
- int MPIPackSize (const bool &data, const int num=1)
  return packed size of a bool
- int **nidr_parse** (const char ∗, FILE ∗)
- static void **scale_chk** (StringArray &ST, RealVector &S, const char ∗what, const char ∗∗univ)
- static void **BuildLabels** (StringArray ∗sa, size_t nsa, size_t n1, size_t n2, const char ∗stub)
- static int **flist_check** (IntList ∗L, int n, IntArray ∗iv, const char ∗what)
- static void **flist_check2** (size_t n, IntArray ∗iv, const char ∗what)
- static int **wronglen** (size_t n, RealVector ∗V, const char ∗what)
- static int **wronglen2** (size_t n, IntVector ∗V, const char ∗what)
- static void **Vcopyup** (RealVector ∗V, RealVector ∗M, size_t i, size_t n)
- static void **Set_rdv** (RealVector ∗V, double d, size_t n)
- static void **Vadj_Normal** (DataVariablesRep ∗dv, size_t i0, Var_Info ∗vi)
- static void **Vbgen_normalUnc** (DataVariablesRep ∗dv, size_t i0)
- static void **Vadj_Lognormal** (DataVariablesRep ∗dv, size_t i0, Var_Info ∗vi)

- static void **Vbgen_lognormalUnc** (DataVariablesRep *dv, size_t i0)
- static void **Vadj_Uniform** (DataVariablesRep *dv, size_t i0, Var_Info *vi)
- static void **Vbgen_uniformUnc** (DataVariablesRep *dv, size_t i0)
- static void **Vadj_Loguniform** (DataVariablesRep *dv, size_t i0, Var_Info *vi)
- static void **Vbgen_loguniformUnc** (DataVariablesRep *dv, size_t i0)
- static void **Vadj_Triangular** (DataVariablesRep *dv, size_t i0, Var_Info *vi)
- static void **Vbgen_triangularUnc** (DataVariablesRep *dv, size_t i0)
- static void **Vadj_Exponential** (DataVariablesRep *dv, size_t i0, Var_Info *vi)
- static void **Vbgen_Exponential** (DataVariablesRep *dv, size_t i0)
- static void **Vadj_Beta** (DataVariablesRep *dv, size_t i0, Var_Info *vi)
- static void **Vbgen_betaUnc** (DataVariablesRep *dv, size_t i0)
- static void **Vadj_Gamma** (DataVariablesRep *dv, size_t i0, Var_Info *vi)
- static void **Vbgen_Gamma** (DataVariablesRep *dv, size_t i0)
- static void **Vadj_Gumbel** (DataVariablesRep *dv, size_t i0, Var_Info *vi)
- static void **Vbgen_Gumbel** (DataVariablesRep *dv, size_t i0)
- static void **Vadj_Frechet** (DataVariablesRep *dv, size_t i0, Var_Info *vi)
- static void **Vbgen_Frechet** (DataVariablesRep *dv, size_t i0)
- static void **Vadj_Weibull** (DataVariablesRep *dv, size_t i0, Var_Info *vi)
- static void **Vbgen_Weibull** (DataVariablesRep *dv, size_t i0)
- static void **Vadj_HistogramBin** (DataVariablesRep *dv, size_t i0, Var_Info *vi)
- static void **Vadj_Poisson** (DataVariablesRep *dv, size_t i0, Var_Info *vi)
- static void **Vadj_Binomial** (DataVariablesRep *dv, size_t i0, Var_Info *vi)
- static void **Vadj_NegBinomial** (DataVariablesRep *dv, size_t i0, Var_Info *vi)
- static void **Vadj_Geometric** (DataVariablesRep *dv, size_t i0, Var_Info *vi)
- static void **Vadj_HyperGeom** (DataVariablesRep *dv, size_t i0, Var_Info *vi)
- static void **Vadj_HistogramPt** (DataVariablesRep *dv, size_t i0, Var_Info *vi)
- static void **Vbgen_HistogramBin** (DataVariablesRep *dv, size_t i0)
- static void **Vbgen_HistogramPt** (DataVariablesRep *dv, size_t i0)
- static void **Vadj_Interval** (DataVariablesRep *dv, size_t i0, Var_Info *vi)
- static void **Vbgen_Interval** (DataVariablesRep *dv, size_t i0)
- static void **Vbgen_Poisson** (DataVariablesRep *dv, size_t i0)
- static void **Vbgen_Binomial** (DataVariablesRep *dv, size_t i0)
- static void **Vbgen_NegBinomial** (DataVariablesRep *dv, size_t i0)
- static void **Vbgen_Geometric** (DataVariablesRep *dv, size_t i0)
- static void **Vbgen_HyperGeom** (DataVariablesRep *dv, size_t i0)
- static void **DIset** (size_t n, IntSetArray *a, IntVector *L, IntVector *U, IntVector *V)
- static void **DRset** (size_t n, RealSetArray *a, RealVector *L, RealVector *U, RealVector *V)
- static void **Vbgen_DDSI** (DataVariablesRep *dv, size_t n)
- static void **Vbgen_DDSR** (DataVariablesRep *dv, size_t n)
- static void **Vbgen_DSSI** (DataVariablesRep *dv, size_t n)
- static void **Vbgen_DSSR** (DataVariablesRep *dv, size_t n)
- static void **not_div** (const char *kind, size_t nsv, size_t m)
- static void **wrong_number** (const char *what, const char *kind, size_t nsv, size_t m)
- static void **too_small** (const char *kind)
- static void **suppressed** (const char *kind, int ndup, int *ip, Real *rp)
- static void **bad_initial_ivalue** (const char *kind, int val)

- static void **bad_initial_rvalue** (const char ∗kind, Real val)
- static void **Vadj_DiscreteDesSetReal** (DataVariablesRep ∗dv, size_t i0, Var_Info ∗vi)
- static void **Vadj_DiscreteDesSetInt** (DataVariablesRep ∗dv, size_t i0, Var_Info ∗vi)
- static void **Vadj_DiscreteStateSetReal** (DataVariablesRep ∗dv, size_t i0, Var_Info ∗vi)
- static void **Vadj_DiscreteStateSetInt** (DataVariablesRep ∗dv, size_t i0, Var_Info ∗vi)
- static void **Rdv_copy** (RealVector ∗∗prdv, RealVectorArray ∗rdva)
- static void **var_iulbl** (const char ∗keyname, Values ∗val, VarLabel ∗vl)
- static Iface_mp_Rlit **MP3** (failAction, recoveryFnVals, recover)
- static Iface_mp_ilit **MP3** (failAction, retryLimit, retry)
- static Iface_mp_lit **MP2** (analysisScheduling, self)
- static Iface_mp_lit **MP2** (analysisScheduling, static)
- static Iface_mp_lit **MP2** (evalScheduling, self)
- static Iface_mp_lit **MP2** (evalScheduling, static)
- static Iface_mp_lit **MP2** (failAction, abort)
- static Iface_mp_lit **MP2** (failAction, continuation)
- static Iface_mp_lit **MP2** (interfaceSynchronization, asynchronous)
- static Iface_mp_lit **MP2** (interfaceType, direct)
- static Iface_mp_lit **MP2** (interfaceType, fork)
- static Iface_mp_lit **MP2** (interfaceType, grid)
- static Iface_mp_lit **MP2** (interfaceType, system)
- static Iface_mp_lit **MP2** (asynchLocalEvalScheduling, self)
- static Iface_mp_lit **MP2** (asynchLocalEvalScheduling, static)
- static String2DArray **MP_** (analysisComponents)
- static StringArray **MP_** (analysisDrivers)
- static StringArray **MP_** (templateFiles)
- static bool **MP_** (activeSetVectorFlag)
- static bool **MP_** (allowExistingResultsFlag)
- static bool **MP_** (apreproFlag)
- static bool **MP_** (dirSave)
- static bool **MP_** (dirTag)
- static bool **MP_** (evalCacheFlag)
- static bool **MP_** (fileSaveFlag)
- static bool **MP_** (fileTagFlag)
- static bool **MP_** (restartFileFlag)
- static bool **MP_** (templateCopy)
- static bool **MP_** (templateReplace)
- static bool **MP_** (useWorkdir)
- static bool **MP_** (verbatimFlag)
- static int **MP_** (analysisServers)
- static int **MP_** (asynchLocalAnalysisConcurrency)
- static int **MP_** (asynchLocalEvalConcurrency)
- static int **MP_** (evalServers)
- static int **MP_** (procsPerAnalysis)
- static IntVector **MP_** (primeBase)
- static IntVector **MP_** (sequenceLeap)
- static IntVector **MP_** (sequenceStart)

- static IntVector **MP_** (stepsPerVariable)
- static Method_mp_ilit2 **MP3** (replacementType, numberRetained, chc)
- static Method_mp_ilit2 **MP3** (replacementType, numberRetained, elitist)
- static Method_mp_ilit2 **MP3** (replacementType, numberRetained, random)
- static Method_mp_ilit2z **MP3** (crossoverType, numCrossPoints, multi_point_binary)
- static Method_mp_ilit2z **MP3** (crossoverType, numCrossPoints, multi_point_parameterized_binary)
- static Method_mp_ilit2z **MP3** (crossoverType, numCrossPoints, multi_point_real)
- static Method_mp_lit **MP2** (boxDivision, all_dimensions)
- static Method_mp_lit **MP2** (boxDivision, major_dimension)
- static Method_mp_lit **MP2** (collocPtReuse, all)
- static Method_mp_lit **MP2** (convergenceType, average_fitness_tracker)
- static Method_mp_lit **MP2** (convergenceType, best_fitness_tracker)
- static Method_mp_lit **MP2** (convergenceType, metric_tracker)
- static Method_mp_lit **MP2** (crossoverType, blend)
- static Method_mp_lit **MP2** (crossoverType, two_point)
- static Method_mp_lit **MP2** (crossoverType, uniform)
- static Method_mp_lit **MP2** (distributionType, complementary)
- static Method_mp_lit **MP2** (distributionType, cumulative)
- static Method_mp_lit **MP2** (evalSynchronization, blocking)
- static Method_mp_lit **MP2** (evalSynchronization, nonblocking)
- static Method_mp_lit **MP2** (evalSynchronize, blocking)
- static Method_mp_lit **MP2** (evalSynchronize, nonblocking)
- static Method_mp_lit **MP2** (expansionSampleType, incremental_lhs)
- static Method_mp_lit **MP2** (exploratoryMoves, adaptive)
- static Method_mp_lit **MP2** (exploratoryMoves, multi_step)
- static Method_mp_lit **MP2** (exploratoryMoves, simple)
- static Method_mp_lit **MP2** (fitnessType, domination_count)
- static Method_mp_lit **MP2** (fitnessType, layer_rank)
- static Method_mp_lit **MP2** (fitnessType, linear_rank)
- static Method_mp_lit **MP2** (fitnessType, merit_function)
- static Method_mp_lit **MP2** (fitnessType, proportional)
- static Method_mp_lit **MP2** (initializationType, random)
- static Method_mp_lit **MP2** (initializationType, unique_random)
- static Method_mp_lit **MP2** (integrationRefine, ais)
- static Method_mp_lit **MP2** (integrationRefine, is)
- static Method_mp_lit **MP2** (integrationRefine, mmais)
- static Method_mp_lit **MP2** (meritFunction, merit_max)
- static Method_mp_lit **MP2** (meritFunction, merit_max_smooth)
- static Method_mp_lit **MP2** (meritFunction, merit1)
- static Method_mp_lit **MP2** (meritFunction, merit1_smooth)
- static Method_mp_lit **MP2** (meritFunction, merit2)
- static Method_mp_lit **MP2** (meritFunction, merit2_smooth)
- static Method_mp_lit **MP2** (meritFunction, merit2_squared)
- static Method_mp_lit **MP2** (methodName, asynch_pattern_search)
- static Method_mp_lit **MP2** (methodName, coliny_cobyla)
- static Method_mp_lit **MP2** (methodName, coliny_direct)

- static Method_mp_lit **MP2** (methodName, coliny_pattern_search)
- static Method_mp_lit **MP2** (methodName, coliny_solis_wets)
- static Method_mp_lit **MP2** (methodName, conmin_frcg)
- static Method_mp_lit **MP2** (methodName, conmin_mfd)
- static Method_mp_lit **MP2** (methodName, dace)
- static Method_mp_lit **MP2** (methodName, dot_bfgs)
- static Method_mp_lit **MP2** (methodName, dot_frcg)
- static Method_mp_lit **MP2** (methodName, dot_mmfd)
- static Method_mp_lit **MP2** (methodName, dot_slp)
- static Method_mp_lit **MP2** (methodName, dot_sqp)
- static Method_mp_lit **MP2** (methodName, efficient_global)
- static Method_mp_lit **MP2** (methodName, fsu_cvt)
- static Method_mp_lit **MP2** (methodName, fsu_halton)
- static Method_mp_lit **MP2** (methodName, fsu_hammersley)
- static Method_mp_lit **MP2** (methodName, ncsu_direct)
- static Method_mp_lit **MP2** (methodName, nl2sol)
- static Method_mp_lit **MP2** (methodName, nlpql_sqp)
- static Method_mp_lit **MP2** (methodName, nlssol_sqp)
- static Method_mp_lit **MP2** (methodName, nond_bayes_calibration)
- static Method_mp_lit **MP2** (methodName, nond_global_evidence)
- static Method_mp_lit **MP2** (methodName, nond_global_interval_est)
- static Method_mp_lit **MP2** (methodName, nond_global_reliability)
- static Method_mp_lit **MP2** (methodName, nond_importance_sampling)
- static Method_mp_lit **MP2** (methodName, nond_local_evidence)
- static Method_mp_lit **MP2** (methodName, nond_local_interval_est)
- static Method_mp_lit **MP2** (methodName, nond_polynomial_chaos)
- static Method_mp_lit **MP2** (methodName, nond_sampling)
- static Method_mp_lit **MP2** (methodName, nond_stoch_collocation)
- static Method_mp_lit **MP2** (methodName, nonlinear_cg)
- static Method_mp_lit **MP2** (methodName, npsol_sqp)
- static Method_mp_lit **MP2** (methodName, optpp_cg)
- static Method_mp_lit **MP2** (methodName, optpp_fd_newton)
- static Method_mp_lit **MP2** (methodName, optpp_g_newton)
- static Method_mp_lit **MP2** (methodName, optpp_newton)
- static Method_mp_lit **MP2** (methodName, optpp_pds)
- static Method_mp_lit **MP2** (methodName, optpp_q_newton)
- static Method_mp_lit **MP2** (methodName, psuade_moat)
- static Method_mp_lit **MP2** (methodName, richardson_extrap)
- static Method_mp_lit **MP2** (methodName, surrogate_based_global)
- static Method_mp_lit **MP2** (methodName, surrogate_based_local)
- static Method_mp_lit **MP2** (methodName, vector_parameter_study)
- static Method_mp_lit **MP2** (methodName, list_parameter_study)
- static Method_mp_lit **MP2** (methodName, centered_parameter_study)
- static Method_mp_lit **MP2** (methodName, multidim_parameter_study)
- static Method_mp_lit **MP2** (minMaxType, maximize)
- static Method_mp_lit **MP2** (minMaxType, minimize)

- static Method_mp_lit **MP2** (mutationType, bit_random)
- static Method_mp_lit **MP2** (mutationType, offset_cauchy)
- static Method_mp_lit **MP2** (mutationType, offset_normal)
- static Method_mp_lit **MP2** (mutationType, offset_uniform)
- static Method_mp_lit **MP2** (mutationType, replace_uniform)
- static Method_mp_lit **MP2** (nondOptAlgorithm, nip)
- static Method_mp_lit **MP2** (nondOptAlgorithm, sqp)
- static Method_mp_lit **MP2** (nondOptAlgorithm, lhs)
- static Method_mp_lit **MP2** (nondOptAlgorithm, ego)
- static Method_mp_lit **MP2** (patternBasis, coordinate)
- static Method_mp_lit **MP2** (patternBasis, simplex)
- static Method_mp_lit **MP2** (reliabilityIntegration, first_order)
- static Method_mp_lit **MP2** (reliabilityIntegration, second_order)
- static Method_mp_lit **MP2** (reliabilitySearchType, amv_plus_u)
- static Method_mp_lit **MP2** (reliabilitySearchType, amv_plus_x)
- static Method_mp_lit **MP2** (reliabilitySearchType, amv_u)
- static Method_mp_lit **MP2** (reliabilitySearchType, amv_x)
- static Method_mp_lit **MP2** (reliabilitySearchType, egra_u)
- static Method_mp_lit **MP2** (reliabilitySearchType, egra_x)
- static Method_mp_lit **MP2** (reliabilitySearchType, no_approx)
- static Method_mp_lit **MP2** (reliabilitySearchType, tana_u)
- static Method_mp_lit **MP2** (reliabilitySearchType, tana_x)
- static Method_mp_lit **MP2** (replacementType, elitist)
- static Method_mp_lit **MP2** (replacementType, favor_feasible)
- static Method_mp_lit **MP2** (replacementType, roulette_wheel)
- static Method_mp_lit **MP2** (replacementType, unique_roulette_wheel)
- static Method_mp_lit **MP2** (responseLevelMappingType, gen_reliabilities)
- static Method_mp_lit **MP2** (responseLevelMappingType, probabilities)
- static Method_mp_lit **MP2** (responseLevelMappingType, reliabilities)
- static Method_mp_lit **MP2** (rngName, mt19937)
- static Method_mp_lit **MP2** (rngName, rnum2)
- static Method_mp_lit **MP2** (sampleType, incremental_lhs)
- static Method_mp_lit **MP2** (sampleType, incremental_random)
- static Method_mp_lit **MP2** (sampleType, lhs)
- static Method_mp_lit **MP2** (sampleType, random)
- static Method_mp_lit **MP2** (searchMethod, gradient_based_line_search)
- static Method_mp_lit **MP2** (searchMethod, tr_pds)
- static Method_mp_lit **MP2** (searchMethod, trust_region)
- static Method_mp_lit **MP2** (searchMethod, value_based_line_search)
- static Method_mp_lit **MP2** (subMethodName, box_behnken)
- static Method_mp_lit **MP2** (subMethodName, central_composite)
- static Method_mp_lit **MP2** (subMethodName, gpmsa)
- static Method_mp_lit **MP2** (subMethodName, grid)
- static Method_mp_lit **MP2** (subMethodName, lhs)
- static Method_mp_lit **MP2** (subMethodName, oa_lhs)
- static Method_mp_lit **MP2** (subMethodName, oas)

- static Method_mp_lit **MP2** (subMethodName, queso)
- static Method_mp_lit **MP2** (subMethodName, random)
- static Method_mp_lit **MP2** (subMethodName, converge_order)
- static Method_mp_lit **MP2** (subMethodName, converge_qoi)
- static Method_mp_lit **MP2** (subMethodName, estimate_order)
- static Method_mp_lit **MP2** (trialType, grid)
- static Method_mp_lit **MP2** (trialType, halton)
- static Method_mp_lit **MP2** (trialType, random)
- static Method_mp_lit2 **MP4** (methodName, reliabilitySearchType, nond_local_reliability,"mv")
- static Method_mp_litc **MP3** (crossoverType, crossoverRate, shuffle_random)
- static Method_mp_litc **MP3** (crossoverType, crossoverRate, null_crossover)
- static Method_mp_litc **MP3** (mutationType, mutationRate, null_mutation)
- static Method_mp_litc **MP3** (mutationType, mutationRate, offset_cauchy)
- static Method_mp_litc **MP3** (mutationType, mutationRate, offset_normal)
- static Method_mp_litc **MP3** (mutationType, mutationRate, offset_uniform)
- static Method_mp_litc **MP3** (replacementType, fitnessLimit, below_limit)
- static Method_mp_litrv **MP3** (nichingType, nicheVector, distance)
- static Method_mp_litrv **MP3** (nichingType, nicheVector, radial)
- static Method_mp_litrv **MP3** (postProcessorType, distanceVector, distance_postprocessor)
- static Method_mp_slit **MP2a** (methodOutput, DEBUG_OUTPUT)
- static Method_mp_slit **MP2a** (methodOutput, QUIET_OUTPUT)
- static Method_mp_slit **MP2a** (methodOutput, SILENT_OUTPUT)
- static Method_mp_slit **MP2a** (methodOutput, VERBOSE_OUTPUT)
- static Method_mp_slit **MP2a** (surrBasedLocalAcceptLogic, FILTER)
- static Method_mp_slit **MP2a** (surrBasedLocalAcceptLogic, TR_RATIO)
- static Method_mp_slit **MP2a** (surrBasedLocalConstrRelax, HOMOTOPY)
- static Method_mp_slit **MP2a** (surrBasedLocalMeritFn, ADAPTIVE_PENALTY_MERIT)
- static Method_mp_slit **MP2a** (surrBasedLocalMeritFn, AUGMENTED_LAGRANGIAN_MERIT)
- static Method_mp_slit **MP2a** (surrBasedLocalMeritFn, LAGRANGIAN_MERIT)
- static Method_mp_slit **MP2a** (surrBasedLocalMeritFn, PENALTY_MERIT)
- static Method_mp_slit **MP2a** (surrBasedLocalSubProbCon, LINEARIZED_CONSTRAINTS)
- static Method_mp_slit **MP2a** (surrBasedLocalSubProbCon, NO_CONSTRAINTS)
- static Method_mp_slit **MP2a** (surrBasedLocalSubProbCon, ORIGINAL_CONSTRAINTS)
- static Method_mp_slit **MP2a** (surrBasedLocalSubProbObj, AUGMENTED_LAGRANGIAN_-OBJECTIVE)
- static Method_mp_slit **MP2a** (surrBasedLocalSubProbObj, LAGRANGIAN_OBJECTIVE)
- static Method_mp_slit **MP2a** (surrBasedLocalSubProbObj, ORIGINAL_PRIMARY)
- static Method_mp_slit **MP2a** (surrBasedLocalSubProbObj, SINGLE_OBJECTIVE)
- static Method_mp_slit2 **MP3** (initializationType, flatFile, flat_file)
- static Method_mp_slit2 **MP3** (methodName, dlDetails, dl_solver)
- static Real **MP_** (absConvTol)
- static Real **MP_** (centeringParam)
- static Real **MP_** (collocationRatio)
- static Real **MP_** (constraintPenalty)
- static Real **MP_** (constrPenalty)
- static Real **MP_** (constraintTolerance)

- static Real **MP_** (contractFactor)
- static Real **MP_** (contractStepLength)
- static Real **MP_** (convergenceTolerance)
- static Real **MP_** (crossoverRate)
- static Real **MP_** (falseConvTol)
- static Real **MP_** (functionPrecision)
- static Real **MP_** (globalBalanceParam)
- static Real **MP_** (gradientTolerance)
- static Real **MP_** (initDelta)
- static Real **MP_** (initStepLength)
- static Real **MP_** (initTRRadius)
- static Real **MP_** (lineSearchTolerance)
- static Real **MP_** (localBalanceParam)
- static Real **MP_** (maxBoxSize)
- static Real **MP_** (maxStep)
- static Real **MP_** (minBoxSize)
- static Real **MP_** (mutationRate)
- static Real **MP_** (mutationScale)
- static Real **MP_** (refinementRate)
- static Real **MP_** (shrinkagePercent)
- static Real **MP_** (singConvTol)
- static Real **MP_** (singRadius)
- static Real **MP_** (smoothFactor)
- static Real **MP_** (solnTarget)
- static Real **MP_** (stepLenToBoundary)
- static Real **MP_** (surrBasedLocalTRContract)
- static Real **MP_** (surrBasedLocalTRContractTrigger)
- static Real **MP_** (surrBasedLocalTRExpand)
- static Real **MP_** (surrBasedLocalTRExpandTrigger)
- static Real **MP_** (surrBasedLocalTRInitSize)
- static Real **MP_** (surrBasedLocalTRMinSize)
- static Real **MP_** (threshDelta)
- static Real **MP_** (threshStepLength)
- static Real **MP_** (vbdDropTolerance)
- static Real **MP_** (volBoxSize)
- static Real **MP_** (xConvTol)
- static RealVector **MP_** (finalPoint)
- static RealVector **MP_** (linearEqConstraintCoeffs)
- static RealVector **MP_** (linearEqTargets)
- static RealVector **MP_** (linearEqScales)
- static RealVector **MP_** (linearIneqConstraintCoeffs)
- static RealVector **MP_** (linearIneqLowerBnds)
- static RealVector **MP_** (linearIneqUpperBnds)
- static RealVector **MP_** (linearIneqScales)
- static RealVector **MP_** (listOfPoints)
- static RealVector **MP_** (sparseGridDimPref)

- static RealVector **MP_** (stepVector)
- static RealVectorArray **MP_** (genReliabilityLevels)
- static RealVectorArray **MP_** (probabilityLevels)
- static RealVectorArray **MP_** (reliabilityLevels)
- static RealVectorArray **MP_** (responseLevels)
- static unsigned short **MP_** (cubIntOrder)
- static unsigned short **MP_** (sparseGridLevel)
- static UShortArray **MP_** (expansionOrder)
- static UShortArray **MP_** (quadratureOrder)
- static UShortArray **MP_** (varPartitions)
- static StringArray **MP_** (linearEqScaleTypes)
- static StringArray **MP_** (linearIneqScaleTypes)
- static StringArray **MP_** (miscOptions)
- static bool **MP_** (allVarsFlag)
- static bool **MP_** (constantPenalty)
- static bool **MP_** (expansionDerivUsageFlag)
- static bool **MP_** (expansionFlag)
- static bool **MP_** (fixedSeedFlag)
- static bool **MP_** (fixedSequenceFlag)
- static bool **MP_** (latinizeFlag)
- static bool **MP_** (mainEffectsFlag)
- static bool **MP_** (methodScaling)
- static bool **MP_** (mutationAdaptive)
- static bool **MP_** (printPopFlag)
- static bool **MP_** (randomizeOrderFlag)
- static bool **MP_** (regressDiag)
- static bool **MP_** (showMiscOptions)
- static bool **MP_** (speculativeFlag)
- static bool **MP_** (surrBasedGlobalReplacePts)
- static bool **MP_** (surrBasedLocalLayerBypass)
- static bool **MP_** (vbdFlag)
- static bool **MP_** (volQualityFlag)
- static short **MP_** (expansionType)
- static short **MP_** (nestingOverride)
- static short **MP_** (refinementType)
- static int **MP_** (collocationPoints)
- static int **MP_** (contractAfterFail)
- static int **MP_** (covarianceType)
- static int **MP_** (expandAfterSuccess)
- static int **MP_** (expansionSamples)
- static int **MP_** (expansionTerms)
- static int **MP_** (maxFunctionEvaluations)
- static int **MP_** (maxIterations)
- static int **MP_** (mutationRange)
- static int **MP_** (newSolnsGenerated)
- static int **MP_** (numSamples)

- static int **MP_** (numSteps)
- static int **MP_** (numSymbols)
- static int **MP_** (numTrials)
- static int **MP_** (populationSize)
- static int **MP_** (previousSamples)
- static int **MP_** (randomSeed)
- static int **MP_** (searchSchemeSize)
- static int **MP_** (surrBasedLocalSoftConvLimit)
- static int **MP_** (totalPatternSize)
- static int **MP_** (verifyLevel)
- static size_t **MP_** (numFinalSolutions)
- static size_t **MP_** (numGenerations)
- static size_t **MP_** (numOffspring)
- static size_t **MP_** (numParents)
- static Method_mp_type **MP2s** (expansionType, ASKEY_U)
- static Method_mp_type **MP2s** (expansionType, STD_NORMAL_U)
- static Method_mp_type **MP2p** (nestingOverride, NESTED)
- static Method_mp_type **MP2p** (nestingOverride, NON_NESTED)
- static Method_mp_type **MP2p** (refinementControl, GENERALIZED_SPARSE)
- static Method_mp_type **MP2p** (refinementControl, SPECTRAL_DECAY)
- static Method_mp_type **MP2p** (refinementControl, TOTAL_SOBOL)
- static Method_mp_type **MP2p** (refinementType, ADAPTIVE_P_REFINEMENT)
- static Method_mp_type **MP2p** (refinementType, UNIFORM_P_REFINEMENT)
- static Method_mp_type **MP2p** (vbdControl, UNIVARIATE_VBD)
- static IntSet **MP_** (surrogateFnIndices)
- static Model_mp_lit **MP2** (approxCorrectionType, additive)
- static Model_mp_lit **MP2** (approxCorrectionType, combined)
- static Model_mp_lit **MP2** (approxCorrectionType, multiplicative)
- static Model_mp_lit **MP2** (approxPointReuse, all)
- static Model_mp_lit **MP2** (approxPointReuse, none)
- static Model_mp_lit **MP2** (approxPointReuse, region)
- static Model_mp_lit **MP2** (marsInterpolation, linear)
- static Model_mp_lit **MP2** (marsInterpolation, cubic)
- static Model_mp_lit **MP2** (modelType, nested)
- static Model_mp_lit **MP2** (modelType, single)
- static Model_mp_lit **MP2** (modelType, surrogate)
- static Model_mp_lit **MP2** (surrogateType, hierarchical)
- static Model_mp_lit **MP2** (surrogateType, global_gaussian)
- static Model_mp_lit **MP2** (surrogateType, global_kriging)
- static Model_mp_lit **MP2** (surrogateType, global_mars)
- static Model_mp_lit **MP2** (surrogateType, global_moving_least_squares)
- static Model_mp_lit **MP2** (surrogateType, global_neural_network)
- static Model_mp_lit **MP2** (surrogateType, global_polynomial)
- static Model_mp_lit **MP2** (surrogateType, global_radial_basis)
- static Model_mp_lit **MP2** (surrogateType, local_taylor)
- static Model_mp_lit **MP2** (surrogateType, multipoint_tana)

- static Model_mp_lit **MP2** (trendOrder, constant)
- static Model_mp_lit **MP2** (trendOrder, linear)
- static Model_mp_lit **MP2** (trendOrder, reduced_quadratic)
- static Model_mp_lit **MP2** (trendOrder, quadratic)
- static Model_mp_ord **MP2s** (approxCorrectionOrder, 0)
- static Model_mp_ord **MP2s** (approxCorrectionOrder, 1)
- static Model_mp_ord **MP2s** (approxCorrectionOrder, 2)
- static Model_mp_ord **MP2s** (polynomialOrder, 1)
- static Model_mp_ord **MP2s** (polynomialOrder, 2)
- static Model_mp_ord **MP2s** (polynomialOrder, 3)
- static Real **MP_** (annRange)
- static RealVector **MP_** (krigingCorrelations)
- static RealVector **MP_** (primaryRespCoeffs)
- static RealVector **MP_** (secondaryRespCoeffs)
- static StringArray **MP_** (primaryVarMaps)
- static StringArray **MP_** (secondaryVarMaps)
- static StringArray **MP_** (diagMetrics)
- static bool **MP_** (approxDerivUsageFlag)
- static bool **MP_** (pointsMinimum)
- static bool **MP_** (pointsRecommended)
- static bool **MP_** (pointSelection)
- static short **MP_** (annNodes)
- static short **MP_** (annRandomWeight)
- static short **MP_** (krigingMaxTrials)
- static short **MP_** (marsMaxBases)
- static short **MP_** (mlsPolyOrder)
- static short **MP_** (mlsWeightFunction)
- static short **MP_** (rbfBases)
- static short **MP_** (rbfMaxPts)
- static short **MP_** (rbfMaxSubsets)
- static short **MP_** (rbfMinPartition)
- static int **MP_** (pointsTotal)
- static IntList **MP_** (idAnalyticGrads)
- static IntList **MP_** (idAnalyticHessians)
- static IntList **MP_** (idNumericalGrads)
- static IntList **MP_** (idNumericalHessians)
- static IntList **MP_** (idQuasiHessians)
- static RealVector **MP_** (primaryRespFnWeights)
- static RealVector **MP_** (nonlinearEqTargets)
- static RealVector **MP_** (nonlinearIneqLowerBnds)
- static RealVector **MP_** (nonlinearIneqUpperBnds)
- static RealVector **MP_** (fdGradStepSize)
- static RealVector **MP_** (fdHessStepSize)
- static RealVector **MP_** (primaryRespFnScales)
- static RealVector **MP_** (nonlinearEqScales)
- static RealVector **MP_** (nonlinearIneqScales)

- static Resp_mp_lit **MP2** (gradientType, analytic)
- static Resp_mp_lit **MP2** (gradientType, mixed)
- static Resp_mp_lit **MP2** (gradientType, none)
- static Resp_mp_lit **MP2** (gradientType, numerical)
- static Resp_mp_lit **MP2** (hessianType, analytic)
- static Resp_mp_lit **MP2** (hessianType, mixed)
- static Resp_mp_lit **MP2** (hessianType, none)
- static Resp_mp_lit **MP2** (hessianType, numerical)
- static Resp_mp_lit **MP2** (hessianType, quasi)
- static Resp_mp_lit **MP2** (intervalType, central)
- static Resp_mp_lit **MP2** (intervalType, forward)
- static Resp_mp_lit **MP2** (methodSource, dakota)
- static Resp_mp_lit **MP2** (methodSource, vendor)
- static Resp_mp_lit **MP2** (quasiHessianType, bfgs)
- static Resp_mp_lit **MP2** (quasiHessianType, damped_bfgs)
- static Resp_mp_lit **MP2** (quasiHessianType, sr1)
- static StringArray **MP_** (primaryRespFnScaleTypes)
- static StringArray **MP_** (nonlinearEqScaleTypes)
- static StringArray **MP_** (nonlinearIneqScaleTypes)
- static StringArray **MP_** (responseLabels)
- static bool **MP_** (centralHess)
- static bool **MP_** (ignoreBounds)
- static size_t **MP_** (numLeastSqTerms)
- static size_t **MP_** (numNonlinearEqConstraints)
- static size_t **MP_** (numNonlinearIneqConstraints)
- static size_t **MP_** (numObjectiveFunctions)
- static size_t **MP_** (numResponseFunctions)
- static Real **MP_** (hybridLSProb)
- static RealVector **MP_** (concurrentParameterSets)
- static Strategy_mp_lit **MP2** (hybridType, collaborative)
- static Strategy_mp_lit **MP2** (hybridType, embedded)
- static Strategy_mp_lit **MP2** (hybridType, sequential)
- static Strategy_mp_lit **MP2** (iteratorScheduling, self)
- static Strategy_mp_lit **MP2** (iteratorScheduling, static)
- static Strategy_mp_lit **MP2** (strategyType, hybrid)
- static Strategy_mp_lit **MP2** (strategyType, multi_start)
- static Strategy_mp_lit **MP2** (strategyType, pareto_set)
- static Strategy_mp_lit **MP2** (strategyType, single_method)
- static StringArray **MP_** (hybridMethodList)
- static bool **MP_** (graphicsFlag)
- static bool **MP_** (tabularDataFlag)
- static int **MP_** (concurrentRandomJobs)
- static int **MP_** (concurrentSeed)
- static int **MP_** (iteratorServers)
- static int **MP_** (outputPrecision)
- static size_t **MP_** (numBetaUncVars)

- static size_t **MP_** (numBinomialUncVars)
- static size_t **MP_** (numContinuousDesVars)
- static size_t **MP_** (numContinuousStateVars)
- static size_t **MP_** (numDiscreteDesRangeVars)
- static size_t **MP_** (numDiscreteDesSetIntVars)
- static size_t **MP_** (numDiscreteDesSetRealVars)
- static size_t **MP_** (numDiscreteStateRangeVars)
- static size_t **MP_** (numDiscreteStateSetIntVars)
- static size_t **MP_** (numDiscreteStateSetRealVars)
- static size_t **MP_** (numExponentialUncVars)
- static size_t **MP_** (numFrechetUncVars)
- static size_t **MP_** (numGammaUncVars)
- static size_t **MP_** (numGeometricUncVars)
- static size_t **MP_** (numGumbelUncVars)
- static size_t **MP_** (numHistogramBinUncVars)
- static size_t **MP_** (numHistogramPtUncVars)
- static size_t **MP_** (numHyperGeomUncVars)
- static size_t **MP_** (numIntervalUncVars)
- static size_t **MP_** (numLognormalUncVars)
- static size_t **MP_** (numLoguniformUncVars)
- static size_t **MP_** (numNegBinomialUncVars)
- static size_t **MP_** (numNormalUncVars)
- static size_t **MP_** (numPoissonUncVars)
- static size_t **MP_** (numTriangularUncVars)
- static size_t **MP_** (numUniformUncVars)
- static size_t **MP_** (numWeibullUncVars)
- static IntVector **MP_** (binomialUncNumTrials)
- static IntVector **MP_** (hyperGeomUncTotalPop)
- static IntVector **MP_** (hyperGeomUncSelectedPop)
- static IntVector **MP_** (hyperGeomUncNumDrawn)
- static IntVector **MP_** (negBinomialUncNumTrials)
- static IntVector **MP_** (discreteDesignRangeLowerBnds)
- static IntVector **MP_** (discreteDesignRangeUpperBnds)
- static IntVector **MP_** (discreteDesignRangeVars)
- static IntVector **MP_** (discreteDesignSetIntVars)
- static IntVector **MP_** (discreteStateRangeLowerBnds)
- static IntVector **MP_** (discreteStateRangeUpperBnds)
- static IntVector **MP_** (discreteStateRangeVars)
- static IntVector **MP_** (discreteStateSetIntVars)
- static IntArray **VP_** (dsvi)
- static IntArray **VP_** (ndsvi)
- static IntArray **VP_** (ndsvr)
- static IntArray **VP_** (nIv)
- static IntArray **VP_** (nbp)
- static IntArray **VP_** (npp)
- static IntArray **VP_** (nssvi)

- static IntArray **VP_** (nssvr)
- static IntArray **VP_** (ssvi)
- static RealVector **MP_** (betaUncLowerBnds)
- static RealVector **MP_** (betaUncUpperBnds)
- static RealVector **MP_** (binomialUncProbPerTrial)
- static RealVector **MP_** (continuousDesignLowerBnds)
- static RealVector **MP_** (continuousDesignUpperBnds)
- static RealVector **MP_** (continuousDesignVars)
- static RealVector **MP_** (continuousDesignScales)
- static RealVector **MP_** (continuousStateLowerBnds)
- static RealVector **MP_** (continuousStateUpperBnds)
- static RealVector **MP_** (continuousStateVars)
- static RealVector **MP_** (discreteDesignSetRealVars)
- static RealVector **MP_** (discreteStateSetRealVars)
- static RealVector **MP_** (frechetUncBetas)
- static RealVector **MP_** (geometricUncProbPerTrial)
- static RealVector **MP_** (gumbelUncBetas)
- static RealVector **MP_** (negBinomialUncProbPerTrial)
- static RealVector **MP_** (normalUncLowerBnds)
- static RealVector **MP_** (normalUncMeans)
- static RealVector **MP_** (normalUncUpperBnds)
- static RealVector **MP_** (poissonUncLambdas)
- static RealVector **MP_** (triangularUncModes)
- static RealVector **VP_** (dsvr)
- static RealVector **VP_** (Ivb)
- static RealVector **VP_** (Ivp)
- static RealVector **VP_** (ba)
- static RealVector **VP_** (bo)
- static RealVector **VP_** (bc)
- static RealVector **VP_** (pa)
- static RealVector **VP_** (pc)
- static RealVector **VP_** (ucm)
- static RealVector **VP_** (ssvr)
- static StringArray **MP_** (continuousDesignLabels)
- static StringArray **MP_** (continuousDesignScaleTypes)
- static StringArray **MP_** (continuousStateLabels)
- static StringArray **MP_** (discreteDesignRangeLabels)
- static StringArray **MP_** (discreteDesignSetIntLabels)
- static StringArray **MP_** (discreteDesignSetRealLabels)
- static StringArray **MP_** (discreteStateRangeLabels)
- static StringArray **MP_** (discreteStateSetIntLabels)
- static StringArray **MP_** (discreteStateSetRealLabels)
- static Var_brv **MP2s** (betaUncAlphas, 0.)
- static Var_brv **MP2s** (betaUncBetas, 0.)
- static Var_brv **MP2s** (exponentialUncBetas, 0.)
- static Var_brv **MP2s** (frechetUncAlphas, 2.)

- static Var_brv **MP2s** (gammaUncAlphas, 0.)
- static Var_brv **MP2s** (gammaUncBetas, 0.)
- static Var_brv **MP2s** (gumbelUncAlphas, 0.)
- static Var_brv **MP2s** (lognormalUncErrFacts, 1.)
- static Var_brv **MP2s** (lognormalUncLambdas, 0.)
- static Var_brv **MP2s** (lognormalUncLowerBnds, 0.)
- static Var_brv **MP2s** (lognormalUncMeans, 0.)
- static Var_brv **MP2s** (lognormalUncStdDevs, 0.)
- static Var_brv **MP2s** (lognormalUncUpperBnds, DBL_MAX)
- static Var_brv **MP2s** (lognormalUncZetas, 0.)
- static Var_brv **MP2s** (loguniformUncLowerBnds, 0.)
- static Var_brv **MP2s** (loguniformUncUpperBnds, DBL_MAX)
- static Var_brv **MP2s** (normalUncStdDevs, 0.)
- static Var_brv **MP2s** (triangularUncLowerBnds,-DBL_MAX)
- static Var_brv **MP2s** (triangularUncUpperBnds, DBL_MAX)
- static Var_brv **MP2s** (uniformUncLowerBnds,-DBL_MAX)
- static Var_brv **MP2s** (uniformUncUpperBnds, DBL_MAX)
- static Var_brv **MP2s** (weibullUncAlphas, 0.)
- static Var_brv **MP2s** (weibullUncBetas, 0.)
- static const char * **Var_Name** (StringArray *sa, char *buf, size_t i)
- void **dn2f_** (int *n, int *p, Real *x, Calcrj, int *iv, int *liv, int *lv, Real *v, int *ui, void *ur, Vf)
- void **dn2fb_** (int *n, int *p, Real *x, Real *b, Calcrj, int *iv, int *liv, int *lv, Real *v, int *ui, void *ur, Vf)
- void **dn2g_** (int *n, int *p, Real *x, Calcrj, Calcrj, int *iv, int *liv, int *lv, Real *v, int *ui, void *ur, Vf)
- void **dn2gb_** (int *n, int *p, Real *x, Real *b, Calcrj, Calcrj, int *iv, int *liv, int *lv, Real *v, int *ui, void *ur, Vf)
- void **divset_** (int *, int *, int *, int *, Real *)
- double **dr7mdc_** (int *)
- static void **Rswapchk** (Nl2Misc *q)
- static int **hasnaninf** (const double *d, int n)
- Real rel_change_c_star (const RealVector &curr_c_star, const RealVector &prev_c_star)

  Computes relative change between successive c_stars using Euclidean norm.

- std::istream & operator>> (std::istream &s, ParamResponsePair &pair)

  std::istream extraction operator for ParamResponsePair

- std::ostream & operator<< (std::ostream &s, const ParamResponsePair &pair)

  std::ostream insertion operator for ParamResponsePair

- BiStream & operator>> (BiStream &s, ParamResponsePair &pair)

  BiStream extraction operator for ParamResponsePair.

- BoStream & operator<< (BoStream &s, const ParamResponsePair &pair)

  BoStream insertion operator for ParamResponsePair.

- MPIUnpackBuffer & operator>> (MPIUnpackBuffer &s, ParamResponsePair &pair)

  MPIUnpackBuffer extraction operator for ParamResponsePair.

- MPIPackBuffer & operator<< (MPIPackBuffer &s, const ParamResponsePair &pair)

  MPIPackBuffer insertion operator for ParamResponsePair.

- bool operator== (const ParamResponsePair &pair1, const ParamResponsePair &pair2)

  equality operator

- bool operator!= (const ParamResponsePair &pair1, const ParamResponsePair &pair2)

  inequality operator

- static void ∗ **binsearch** (void ∗kw, size_t kwsize, size_t n, const char ∗key)
- static const char ∗ **Begins** (const String &entry_name, const char ∗s)
- static void **Bad_name** (String entry_name, const char ∗where)
- static void **Locked_db** ()
- static void **Null_rep** (const char ∗who)
- static void **Null_rep1** (const char ∗who)
- bool set_compare (const ParamResponsePair &database_pr, const ActiveSet &search_set)

  on ActiveSet content (request vector and derivative variables vector)

- bool id_vars_exact_compare (const ParamResponsePair &database_pr, const ParamResponsePair &search_pr)

  search function for a particular ParamResponsePair within a PRPMultiIndex

- std::size_t hash_value (const ParamResponsePair &prp)

  hash_value for ParamResponsePairs stored in a PRPMultiIndex

- PRPCacheHIter hashedCacheBegin (PRPCache &prp_cache)

  hashed definition of cache begin

- PRPCacheHIter hashedCacheEnd (PRPCache &prp_cache)

  hashed definition of cache end

- PRPQueueHIter hashedQueueBegin (PRPQueue &prp_queue)

  hashed definition of queue begin

- PRPQueueHIter hashedQueueEnd (PRPQueue &prp_queue)

  hashed definition of queue end

- PRPCacheHIter lookup_by_val (PRPMultiIndexCache &prp_cache, const ParamResponsePair &search_pr)

  ActiveSet search data within search_pr.

- bool lookup_by_val (PRPMultiIndexCache &prp_cache, const ParamResponsePair &search_pr, ParamResponsePair &found_pr)

  lookup_by_val(PRPMultiIndexCache&, ParamResponsePair&)

- PRPCacheHIter lookup_by_val (PRPMultiIndexCache &prp_cache, const String &search_interface_id, const Variables &search_vars, const ActiveSet &search_set)

  based on interface id, variables, and ActiveSet search data

- bool lookup_by_val (PRPMultiIndexCache &prp_cache, const String &search_interface_id, const Variables &search_vars, const ActiveSet &search_set, ParamResponsePair &found_pr)

  variables, and ActiveSet search data

- bool lookup_by_val (PRPMultiIndexCache &prp_cache, const String &search_interface_id, const Variables &search_vars, const ActiveSet &search_set, int &found_eval_id)

  based on interface id, variables, and ActiveSet search data

- bool lookup_by_val (PRPMultiIndexCache &prp_cache, const String &search_interface_id, const Variables &search_vars, const ActiveSet &search_set, Response &found_resp)

  based on interface id, variables, and ActiveSet search data

- PRPCacheOIter lookup_by_ids (PRPMultiIndexCache &prp_cache, const IntStringPair &search_ids)

  (i.e. std::pair<eval_id,interface_id>) search data

- bool lookup_by_ids (PRPMultiIndexCache &prp_cache, const IntStringPair &search_eval_interface_ids, ParamResponsePair &found_pr)

  eval_interface_ids

- bool lookup_by_ids (PRPMultiIndexCache &prp_cache, const ParamResponsePair &search_pr, ParamResponsePair &found_pr)

  eval_interface_ids from the ParamResponsePair search data

- PRPQueueHIter lookup_by_val (PRPMultiIndexQueue &prp_queue, const ParamResponsePair &search_pr)

  ActiveSet search data within search_pr.

- bool lookup_by_val (PRPMultiIndexQueue &prp_queue, const ParamResponsePair &search_pr, ParamResponsePair &found_pr)

  lookup_by_val(PRPMultiIndexQueue&, ParamResponsePair&)

- PRPQueueHIter lookup_by_val (PRPMultiIndexQueue &prp_queue, const String &search_interface_id, const Variables &search_vars, const ActiveSet &search_set)

  based on interface id, variables, and ActiveSet search data

- bool lookup_by_val (PRPMultiIndexQueue &prp_queue, const String &search_interface_id, const Variables &search_vars, const ActiveSet &search_set, ParamResponsePair &found_pr)

  variables, and ActiveSet search data

- bool lookup_by_val (PRPMultiIndexQueue &prp_queue, const String &search_interface_id, const Variables &search_vars, const ActiveSet &search_set, int &found_eval_id)

  based on interface id, variables, and ActiveSet search data

- bool lookup_by_val (PRPMultiIndexQueue &prp_queue, const String &search_interface_id, const Variables &search_vars, const ActiveSet &search_set, Response &found_resp)

  based on interface id, variables, and ActiveSet search data

- PRPQueueOIter lookup_by_eval_id (PRPMultiIndexQueue &prp_queue, const int &search_id)

  (i.e. integer eval_id) search data

- bool lookup_by_eval_id (PRPMultiIndexQueue &prp_queue, const int &search_id, ParamResponsePair &found_pr)

  find a ParamResponsePair within a PRPMultiIndexQueue based on eval_id

- bool lookup_by_eval_id (PRPMultiIndexQueue &prp_queue, const ParamResponsePair &search_pr, ParamResponsePair &found_pr)

  eval_id from the ParamResponsePair search data

- void print_restart (int argc, char **argv, String print_dest)

  print a restart file

- void print_restart_tabular (int argc, char **argv, String print_dest)

  print a restart file (tabular format)

- void read_neutral (int argc, char **argv)

  read a restart file (neutral file format)

- void repair_restart (int argc, char **argv, String identifier_type)

  repair a restart file by removing corrupted evaluations

- void concatenate_restart (int argc, char **argv)

  concatenate multiple restart files

Variables

- const volatile bool **dakota_cast_registered** = register_dakota_cast()
- ParallelLibrary * Dak_pl

  set by ParallelLibrary, for use in CLH

- ProblemDescDB dummy_db

  dummy ProblemDescDB object used for mandatory reference initialization when a real ProblemDescDB instance is unavailable

- static Libentry **Dot_entries** [ ] = { {"dot_"}, {"dot510_"} }
- static Libentry **Npsol_entries** [ ] = { {"npsol_"}, {"nlssol_"}, {"npoptn2_"} }
- static Libentry **Nlpql_entries** [ ] = { {"nlpqlp_"}, {"ql_"} }
- static SharedLib **Dot_lib** = { "libdot.dll", NumberOf(Dot_entries), Dot_entries }
- static SharedLib **Npsol_lib** = { "libnpsol.dll", NumberOf(Npsol_entries), Npsol_entries }

- static SharedLib **Nlpql_lib** = { "libnlpql.dll", NumberOf(Nlpql_entries), Nlpql_entries }
- DOTOptimizer *(*) **new_DOTOptimizer** (Model &model) = no_DOT
- DOTOptimizer *(*) **new_DOTOptimizer1** (NoDBBaseConstructor, Model &model) = no_DOT1
- JEGAOptimizer *(*) **new_JEGAOptimizer** (Model &model) = no_JEGA
- NLPQLPOptimizer *(*) **new_NLPQLPOptimizer** (Model &model) = no_NLPQL
- NLPQLPOptimizer *(*) **new_NLPQLPOptimizer1** (NoDBBaseConstructor, Model &model) = no_NLPQL1
- NPSOLOptimizer *(*) **new_NPSOLOptimizer** (Model &model) = no_NPSOL
- NPSOLOptimizer *(*) **new_NPSOLOptimizer1** (NoDBBaseConstructor, Model &model) = no_NPSOL1
- NPSOLOptimizer *(*) **new_NPSOLOptimizer2** (Model &, const int &, const Real &) = no_NPSOL2
- NPSOLOptimizer *(*) **new_NPSOLOptimizer3** (const RealVector &initial_point, const RealVector &var_lower_bnds, const RealVector &var_upper_bnds, const RealMatrix &lin_ineq_coeffs, const RealVector &lin_ineq_lower_bnds, const RealVector &lin_ineq_upper_bnds, const RealMatrix &lin_eq_coeffs, const RealVector &lin_eq_targets, const RealVector &nonlin_ineq_lower_bnds, const RealVector &nonlin_ineq_upper_bnds, const RealVector &nonlin_eq_targets, void(*user_obj_eval)(int &, int &, double *, double &, double *, int &), void(*user_con_eval)(int &, int &, int &, int &, int *, double *, double *, double *, int &), const int &derivative_level, const Real &conv_tol) = no_NPSOL3
- NLSSOLLeastSq *(*) **new_NLSSOLLeastSq** (Model &model) = no_NLSSOL
- NLSSOLLeastSq *(*) **new_NLSSOLLeastSq1** (NoDBBaseConstructor, Model &model) = no_NLSSOL1

- ParallelLibrary dummy_lib

  dummy ParallelLibrary object used for mandatory reference initialization when a real ParallelLibrary instance is unavailable

- ProblemDescDB dummy_db

  dummy ProblemDescDB object used for mandatory reference initialization when a real ProblemDescDB instance is unavailable

- Graphics dakota_graphics

  the global Dakota::Graphics object used by strategies, models, and approximations

- Interface dummy_interface

  dummy Interface object used for mandatory reference initialization or default virtual function return by reference when a real Interface instance is unavailable

- Model dummy_model

  dummy Model object used for mandatory reference initialization or default virtual function return by reference when a real Model instance is unavailable

- Iterator dummy_iterator

  dummy Iterator object used for mandatory reference initialization or default virtual function return by reference when a real Iterator instance is unavailable

- ProblemDescDB dummy_db

  dummy ProblemDescDB object used for mandatory reference initialization when a real ProblemDescDB instance is unavailable

- ParallelLibrary dummy_lib

  dummy ParallelLibrary object used for mandatory reference initialization when a real ParallelLibrary instance is unavailable

- const char * FIELD_NAMES [ ]
- const int NUMBER_OF_FIELDS = 25
- PRPCache data_pairs

  contains all parameter/response pairs.

- Dakota_funcs * **DF**
- Dakota_funcs **DakFuncs0**
- static time_t **start_time**
- static char * **progname**
- static int **dakdrive**
- static char **slmap** [256]
- static char * **wd_path** [N_wdpath]
- std::ostream * dakota_cout = &cout

  DAKOTA stdout initially points to cout, but may be redirected to a tagged ofstream if there are concurrent iterators.

- std::ostream * dakota_cerr = &cerr

  DAKOTA stderr initially points to cerr, but may be redirected to a tagged ofstream if there are concurrent iterators.

- PRPCache data_pairs

  contains all parameter/response pairs.

- BoStream write_restart

  the restart binary output stream (doesn't really need to be global anymore except for abort_handler()).

- Graphics dakota_graphics

  the global Dakota::Graphics object used by strategies, models, and approximations

- int write_precision = 10

  used in ostream data output functions (restart_util.C overrides this default value)

- ParallelLibrary dummy_lib ("dummy")

  dummy ParallelLibrary object used for mandatory reference initialization when a real ParallelLibrary instance is unavailable

- ProblemDescDB dummy_db

  dummy ProblemDescDB object used for mandatory reference initialization when a real ProblemDescDB instance is unavailable

- int mc_ptr_int = 0

  global pointer for ModelCenter API

- int dc_ptr_int = 0

global pointer for ModelCenter eval DB

- ProblemDescDB ∗ Dak_pddb

  set by ProblemDescDB, for use in parsing

- ParallelLibrary ∗ Dak_pl

  set by ParallelLibrary, for use in CLH

- const size_t _NPOS = ∼(size_t)0

  special value returned by index() when entry not found

- std::ostream ∗ dakota_cout

  DAKOTA stdout initially points to cout, but may be redirected to a tagged ofstream if there are concurrent iterators.

- std::ostream ∗ dakota_cerr

  DAKOTA stderr initially points to cerr, but may be redirected to a tagged ofstream if there are concurrent iterators.

- int write_precision

  used in ostream data output functions (restart_util.C overrides this default value)

- int mc_ptr_int

  global pointer for ModelCenter API

- int dc_ptr_int

  global pointer for ModelCenter eval DB

- static GuiKeyWord kw_1 [3]
- static GuiKeyWord **kw_2** [1]
- static GuiKeyWord **kw_3** [4]
- static GuiKeyWord **kw_4** [2]
- static GuiKeyWord **kw_5** [7]
- static GuiKeyWord **kw_6** [8]
- static GuiKeyWord **kw_7** [9]
- static GuiKeyWord **kw_8** [4]
- static GuiKeyWord **kw_9** [10]
- static GuiKeyWord **kw_10** [7]
- static GuiKeyWord **kw_11** [2]
- static GuiKeyWord **kw_12** [18]
- static GuiKeyWord **kw_13** [2]
- static GuiKeyWord **kw_14** [8]
- static GuiKeyWord **kw_15** [3]
- static GuiKeyWord **kw_16** [7]
- static GuiKeyWord **kw_17** [2]
- static GuiKeyWord **kw_18** [11]
- static GuiKeyWord **kw_19** [3]
- static GuiKeyWord **kw_20** [2]

- static GuiKeyWord **kw_21** [3]
- static GuiKeyWord **kw_22** [2]
- static GuiKeyWord **kw_23** [5]
- static GuiKeyWord **kw_24** [4]
- static GuiKeyWord **kw_25** [14]
- static GuiKeyWord **kw_26** [3]
- static GuiKeyWord **kw_27** [2]
- static GuiKeyWord **kw_28** [2]
- static GuiKeyWord **kw_29** [17]
- static GuiKeyWord **kw_30** [13]
- static GuiKeyWord **kw_31** [9]
- static GuiKeyWord **kw_32** [1]
- static GuiKeyWord **kw_33** [14]
- static GuiKeyWord **kw_34** [2]
- static GuiKeyWord **kw_35** [15]
- static GuiKeyWord **kw_36** [10]
- static GuiKeyWord **kw_37** [1]
- static GuiKeyWord **kw_38** [3]
- static GuiKeyWord **kw_39** [1]
- static GuiKeyWord **kw_40** [8]
- static GuiKeyWord **kw_41** [1]
- static GuiKeyWord **kw_42** [10]
- static GuiKeyWord **kw_43** [2]
- static GuiKeyWord **kw_44** [1]
- static GuiKeyWord **kw_45** [1]
- static GuiKeyWord **kw_46** [2]
- static GuiKeyWord **kw_47** [2]
- static GuiKeyWord **kw_48** [2]
- static GuiKeyWord **kw_49** [9]
- static GuiKeyWord **kw_50** [2]
- static GuiKeyWord **kw_51** [5]
- static GuiKeyWord **kw_52** [2]
- static GuiKeyWord **kw_53** [1]
- static GuiKeyWord **kw_54** [1]
- static GuiKeyWord **kw_55** [2]
- static GuiKeyWord **kw_56** [2]
- static GuiKeyWord **kw_57** [2]
- static GuiKeyWord **kw_58** [9]
- static GuiKeyWord **kw_59** [2]
- static GuiKeyWord **kw_60** [2]
- static GuiKeyWord **kw_61** [7]
- static GuiKeyWord **kw_62** [1]
- static GuiKeyWord **kw_63** [2]
- static GuiKeyWord **kw_64** [1]
- static GuiKeyWord **kw_65** [1]
- static GuiKeyWord **kw_66** [2]

- static GuiKeyWord **kw_67** [2]
- static GuiKeyWord **kw_68** [6]
- static GuiKeyWord **kw_69** [2]
- static GuiKeyWord **kw_70** [5]
- static GuiKeyWord **kw_71** [3]
- static GuiKeyWord **kw_72** [9]
- static GuiKeyWord **kw_73** [1]
- static GuiKeyWord **kw_74** [3]
- static GuiKeyWord **kw_75** [2]
- static GuiKeyWord **kw_76** [7]
- static GuiKeyWord **kw_77** [2]
- static GuiKeyWord **kw_78** [5]
- static GuiKeyWord **kw_79** [3]
- static GuiKeyWord **kw_80** [1]
- static GuiKeyWord **kw_81** [6]
- static GuiKeyWord **kw_82** [3]
- static GuiKeyWord **kw_83** [2]
- static GuiKeyWord **kw_84** [2]
- static GuiKeyWord **kw_85** [1]
- static GuiKeyWord **kw_86** [2]
- static GuiKeyWord **kw_87** [4]
- static GuiKeyWord **kw_88** [21]
- static GuiKeyWord **kw_89** [1]
- static GuiKeyWord **kw_90** [4]
- static GuiKeyWord **kw_91** [9]
- static GuiKeyWord **kw_92** [1]
- static GuiKeyWord **kw_93** [3]
- static GuiKeyWord **kw_94** [2]
- static GuiKeyWord **kw_95** [5]
- static GuiKeyWord **kw_96** [2]
- static GuiKeyWord **kw_97** [3]
- static GuiKeyWord **kw_98** [3]
- static GuiKeyWord **kw_99** [2]
- static GuiKeyWord **kw_100** [2]
- static GuiKeyWord **kw_101** [3]
- static GuiKeyWord **kw_102** [2]
- static GuiKeyWord **kw_103** [3]
- static GuiKeyWord **kw_104** [2]
- static GuiKeyWord **kw_105** [23]
- static GuiKeyWord **kw_106** [1]
- static GuiKeyWord **kw_107** [4]
- static GuiKeyWord **kw_108** [1]
- static GuiKeyWord **kw_109** [12]
- static GuiKeyWord **kw_110** [2]
- static GuiKeyWord **kw_111** [2]
- static GuiKeyWord **kw_112** [3]

- static GuiKeyWord **kw_113** [2]
- static GuiKeyWord **kw_114** [1]
- static GuiKeyWord **kw_115** [2]
- static GuiKeyWord **kw_116** [20]
- static GuiKeyWord **kw_117** [1]
- static GuiKeyWord **kw_118** [12]
- static GuiKeyWord **kw_119** [11]
- static GuiKeyWord **kw_120** [10]
- static GuiKeyWord **kw_121** [4]
- static GuiKeyWord **kw_122** [16]
- static GuiKeyWord **kw_123** [4]
- static GuiKeyWord **kw_124** [3]
- static GuiKeyWord **kw_125** [4]
- static GuiKeyWord **kw_126** [2]
- static GuiKeyWord **kw_127** [2]
- static GuiKeyWord **kw_128** [2]
- static GuiKeyWord **kw_129** [2]
- static GuiKeyWord **kw_130** [4]
- static GuiKeyWord **kw_131** [19]
- static GuiKeyWord **kw_132** [14]
- static GuiKeyWord **kw_133** [3]
- static GuiKeyWord **kw_134** [2]
- static GuiKeyWord **kw_135** [7]
- static GuiKeyWord **kw_136** [1]
- static GuiKeyWord **kw_137** [4]
- static GuiKeyWord **kw_138** [6]
- static GuiKeyWord **kw_139** [18]
- static GuiKeyWord **kw_140** [3]
- static GuiKeyWord **kw_141** [75]
- static GuiKeyWord **kw_142** [1]
- static GuiKeyWord **kw_143** [4]
- static GuiKeyWord **kw_144** [2]
- static GuiKeyWord **kw_145** [1]
- static GuiKeyWord **kw_146** [6]
- static GuiKeyWord **kw_147** [3]
- static GuiKeyWord **kw_148** [2]
- static GuiKeyWord **kw_149** [4]
- static GuiKeyWord **kw_150** [4]
- static GuiKeyWord **kw_151** [2]
- static GuiKeyWord **kw_152** [2]
- static GuiKeyWord **kw_153** [2]
- static GuiKeyWord **kw_154** [3]
- static GuiKeyWord **kw_155** [3]
- static GuiKeyWord **kw_156** [4]
- static GuiKeyWord **kw_157** [3]
- static GuiKeyWord **kw_158** [18]

- static GuiKeyWord **kw_159** [6]
- static GuiKeyWord **kw_160** [3]
- static GuiKeyWord **kw_161** [2]
- static GuiKeyWord **kw_162** [2]
- static GuiKeyWord **kw_163** [5]
- static GuiKeyWord **kw_164** [6]
- static GuiKeyWord **kw_165** [1]
- static GuiKeyWord **kw_166** [10]
- static GuiKeyWord **kw_167** [2]
- static GuiKeyWord **kw_168** [1]
- static GuiKeyWord **kw_169** [2]
- static GuiKeyWord **kw_170** [5]
- static GuiKeyWord **kw_171** [3]
- static GuiKeyWord **kw_172** [4]
- static GuiKeyWord **kw_173** [6]
- static GuiKeyWord **kw_174** [3]
- static GuiKeyWord **kw_175** [4]
- static GuiKeyWord **kw_176** [5]
- static GuiKeyWord **kw_177** [8]
- static GuiKeyWord **kw_178** [4]
- static GuiKeyWord **kw_179** [1]
- static GuiKeyWord **kw_180** [2]
- static GuiKeyWord **kw_181** [15]
- static GuiKeyWord **kw_182** [1]
- static GuiKeyWord **kw_183** [3]
- static GuiKeyWord **kw_184** [1]
- static GuiKeyWord **kw_185** [5]
- static GuiKeyWord **kw_186** [1]
- static GuiKeyWord **kw_187** [3]
- static GuiKeyWord **kw_188** [1]
- static GuiKeyWord **kw_189** [5]
- static GuiKeyWord **kw_190** [1]
- static GuiKeyWord **kw_191** [1]
- static GuiKeyWord **kw_192** [10]
- static GuiKeyWord **kw_193** [10]
- static GuiKeyWord **kw_194** [3]
- static GuiKeyWord **kw_195** [12]
- static GuiKeyWord **kw_196** [8]
- static GuiKeyWord **kw_197** [8]
- static GuiKeyWord **kw_198** [4]
- static GuiKeyWord **kw_199** [4]
- static GuiKeyWord **kw_200** [8]
- static GuiKeyWord **kw_201** [4]
- static GuiKeyWord **kw_202** [4]
- static GuiKeyWord **kw_203** [4]
- static GuiKeyWord **kw_204** [6]

- static GuiKeyWord **kw_205** [6]
- static GuiKeyWord **kw_206** [2]
- static GuiKeyWord **kw_207** [6]
- static GuiKeyWord **kw_208** [10]
- static GuiKeyWord **kw_209** [8]
- static GuiKeyWord **kw_210** [4]
- static GuiKeyWord **kw_211** [8]
- static GuiKeyWord **kw_212** [2]
- static GuiKeyWord **kw_213** [4]
- static GuiKeyWord **kw_214** [10]
- static GuiKeyWord **kw_215** [6]
- static GuiKeyWord **kw_216** [3]
- static GuiKeyWord **kw_217** [10]
- static GuiKeyWord **kw_218** [2]
- static GuiKeyWord **kw_219** [8]
- static GuiKeyWord **kw_220** [6]
- static GuiKeyWord **kw_221** [6]
- static GuiKeyWord **kw_222** [29]
- static GuiKeyWord **kw_223** [6]
- static KeyWord kw_1 [3]
- static KeyWord **kw_2** [1]
- static KeyWord **kw_3** [4]
- static KeyWord **kw_4** [2]
- static KeyWord **kw_5** [7]
- static KeyWord **kw_6** [8]
- static KeyWord **kw_7** [9]
- static KeyWord **kw_8** [4]
- static KeyWord **kw_9** [10]
- static KeyWord **kw_20** [2]
- static KeyWord **kw_21** [3]
- static KeyWord **kw_22** [2]
- static KeyWord **kw_26** [3]
- static KeyWord **kw_27** [2]
- static KeyWord **kw_34** [2]
- static KeyWord **kw_37** [1]
- static KeyWord **kw_44** [1]
- static KeyWord **kw_48** [2]
- static KeyWord **kw_56** [2]
- static KeyWord **kw_63** [2]
- static KeyWord **kw_66** [2]
- static KeyWord **kw_67** [2]
- static KeyWord **kw_80** [1]
- static KeyWord **kw_84** [2]
- static KeyWord **kw_94** [2]
- static KeyWord **kw_101** [3]
- static KeyWord **kw_102** [2]

- static KeyWord **kw_104** [2]
- static KeyWord **kw_110** [2]
- static KeyWord **kw_113** [2]
- static KeyWord **kw_137** [4]
- static KeyWord **kw_149** [4]
- static KeyWord **kw_176** [5]
- static KeyWord **kw_182** [1]
- static KeyWord **kw_209** [8]
- static KeyWord **kw_220** [6]
- static KeyWord **kw_224** [8]
- static KeyWord **kw_225** [2]
- static KeyWord **kw_226** [4]
- static KeyWord **kw_227** [10]
- static KeyWord **kw_228** [6]
- static KeyWord **kw_229** [3]
- static KeyWord **kw_230** [10]
- static KeyWord **kw_231** [2]
- static KeyWord **kw_232** [8]
- static KeyWord **kw_233** [6]
- static KeyWord **kw_234** [6]
- static KeyWord **kw_235** [29]
- static KeyWord **kw_236** [6]
- FILE ∗ **nidrin**
- static const char ∗ **aln_scaletypes** [ ] = { "auto", "log", "none", 0 }
- static Var_uinfo **CAUVLbl** [CAUVar_Nkinds]
- static Var_uinfo **DAUIVLbl** [DAUIVar_Nkinds]
- static Var_uinfo **DAURVLbl** [DAURVar_Nkinds]
- static Var_uinfo **CEUVLbl** [CEUVar_Nkinds]
- static Var_uinfo **DiscSetLbl** [DiscSetVar_Nkinds]
- static VarLabelChk **Vlch** [ ]
- static VLstuff **VLS** [N_VLS]
- static int **VL_aleatory** [N_VLS] = { 1, 0, 1, 1 }
- static String **MP_** (algebraicMappings)
- static String **MP_** (idInterface)
- static String **MP_** (inputFilter)
- static String **MP_** (outputFilter)
- static String **MP_** (parametersFile)
- static String **MP_** (resultsFile)
- static String **MP_** (templateDir)
- static String **MP_** (workDir)
- static String **MP_** (centralPath)
- static String **MP_** (expansionImportFile)
- static String **MP_** (idMethod)
- static String **MP_** (logFile)
- static String **MP_** (meritFn)
- static String **MP_** (modelPointer)

- static String **MP_** (subMethodName)
- static String **MP_** (subMethodPointer)
- static String **MP_** (xObsDataFile)
- static String **MP_** (yObsDataFile)
- static String **MP_** (yStdDataFile)
- static String **MP_** (approxPointReuseFile)
- static String **MP_** (idModel)
- static String **MP_** (interfacePointer)
- static String **MP_** (krigingOptMethod)
- static String **MP_** (lowFidelityModelPointer)
- static String **MP_** (optionalInterfRespPointer)
- static String **MP_** (responsesPointer)
- static String **MP_** (subMethodPointer)
- static String **MP_** (truthModelPointer)
- static String **MP_** (variablesPointer)
- static String **MP_** (idResponses)
- static String **MP_** (leastSqDataFile)
- static String **MP_** (hybridGlobalMethodPointer)
- static String **MP_** (hybridLocalMethodPointer)
- static String **MP_** (methodPointer)
- static String **MP_** (tabularDataFile)
- static String **MP_** (idVariables)
- static Var_bgen **var_mp_bgen** [ ]
- static Var_bgen **var_mp_bgen_audr** [ ]
- static Var_bgen **var_mp_bgen_audi** [ ]
- static Var_bgen **var_mp_bgen_eu** [ ]
- static Var_bgen **var_mp_bgen_dis** [ ]
- static VarBgen **Bgen** [ ]
- static Var_bchk **var_mp_bndchk** [ ]
- static Var_ibchk **var_mp_ibndchk** [ ]
- NPSOLOptimizer ∗(∗) **new_NPSOLOptimizer** (Model &)
- NPSOLOptimizer ∗(∗) **new_NPSOLOptimizer1** (NoDBBaseConstructor, Model &)
- NPSOLOptimizer ∗(∗) **new_NPSOLOptimizer2** (Model &, const int &, const Real &)
- NPSOLOptimizer ∗(∗) **new_NPSOLOptimizer3** (const RealVector &initial_point, const RealVector &var_lower_bnds, const RealVector &var_upper_bnds, const RealMatrix &lin_ineq_coeffs, const RealVector &lin_ineq_lower_bnds, const RealVector &lin_ineq_upper_bnds, const RealMatrix &lin_eq_coeffs, const RealVector &lin_eq_targets, const RealVector &nonlin_ineq_lower_bnds, const RealVector &nonlin_ineq_upper_bnds, const RealVector &nonlin_eq_targets, void(∗user_obj_eval)(int &, int &, double ∗, double &, double ∗, int &), void(∗user_con_eval)(int &, int &, int &, int &, int ∗, double ∗, double ∗, double ∗, int &), const int &derivative_level, const Real &conv_tol)
- ParallelLibrary ∗ Dak_pl

  set by ParallelLibrary, for use in CLH

- ParallelLibrary dummy_lib

  dummy ParallelLibrary object used for mandatory reference initialization when a real ParallelLibrary instance is unavailable

- ProblemDescDB * Dak_pddb

  set by ProblemDescDB, for use in parsing

- const int LARGE_SCALE = 100

  large-scale algorithm if numVars >= LARGE_SCALE

7.1.1 Detailed Description

The primary namespace for DAKOTA.

The COLINOptimizer class wraps COLIN, a Sandia-developed C++ optimization interface library. A variety of COLIN optimizers are defined in COLIN and its associated libraries, including SCOLIB which contains the optimization components from the old COLINY (formerly SGOPT) library. COLIN contains optimizers such as genetic algorithms, pattern search methods, and other nongradient-based techniques. COLINOptimizer uses a COLINApplication object to perform the function evaluations.

The user input mappings are as follows: `max_iterations`, `max_function_evaluations`, `convergence_tolerance`, and `solution_accuracy` are mapped into COLIN's `max_iterations`, `max_function_evaluations_this_trial`, `function_value_tolerance`, `sufficient_objective_value` properties. An `outputLevel` is mapped to COLIN's `output_level` property and a setting of `debug` activates output of method initialization and sets the COLIN `debug` attribute to 10000 for the DEBUG output level. Refer to [Hart, W.E., 2006] for additional information on COLIN objects and controls.

7.1.2 Function Documentation

7.1.2.1 CommandShell & flush (CommandShell & *shell*)

convenient shell manipulator function to "flush" the shell

global convenience function for manipulating the shell; invokes the class member flush function.

7.1.2.2 void start_dakota_heartbeat (int)

Heartbeat function provided by not_executable.C; pass output interval in seconds, or -1 to use $DAKOTA_HEARTBEAT

7.1.2.3 Real Dakota::getdist (const RealVector & *x1*, const RealVector & *x2*)

Gets the Euclidean distance between x1 and x2

7.1.2.4 Real Dakota::mindist (const RealVector & *x*, const RealMatrix & *xset*, int *except*)

Returns the minimum distance between the point x and the points in the set xset (compares against all points in xset except point "except"): if except is not needed, pass 0.

7.1.2.5 Real Dakota::mindistindx (const RealVector & *x*, const RealMatrix & *xset*, const IntArray & *indx*)

Gets the min distance between x and points in the set xset defined by the nindx values in indx.

7.1.2.6 Real Dakota::getRmax (const RealMatrix & *xset*)

Gets the maximum of the min distance between each point and the rest of the set.

7.1.2.7 T Dakota::abort_handler_t (int *code*)

Templatized abort_handler_t method that allows for convenient return from methods that otherwise have no sensible return from error clauses. Usage: MyType& method() { return abort_handler<MyType&>(-1); }

7.1.2.8 int Dakota::start_grid_computing (char * *analysis_driver_script*, char * *params_file*, char * *results_file*)

sample function prototype for launching grid computing

7.1.2.9 int Dakota::stop_grid_computing ()

sample function prototype for terminating grid computing

7.1.2.10 int Dakota::perform_analysis (char * *iteration_num*)

sample function prototype for submitting a grid evaluation

7.1.2.11 string Dakota::asstring (const T & *val*)

Creates a string from the argument *val* using an ostringstream.

This only gets used in this file and is only ever called with ints so no error checking is in place.

Parameters:

val The value of type T to convert to a string.

Returns:

The string representation of *val* created using an ostringstream.

7.1.2.12 void Dakota::run_dakota_data ()

mode 2: direct Data class instantiation.

Rather than parsing from an input file, this function populates Data class objects directly using a minimal specification and relies on constructor defaults and post-processing in post_process() to fill in the rest.

7.1.2.13 void Dakota::run_dakota_data ()

mode 2: direct Data class instantiation.

Rather than parsing from an input file, this function populates Data class objects directly using a minimal specification and relies on constructor defaults and post-processing in post_process() to fill in the rest.

7.1.2.14 bool Dakota::set_compare (const ParamResponsePair & *database_pr*, const ActiveSet & *search_set*) [inline]

on ActiveSet content (request vector and derivative variables vector)

a global function to compare the ActiveSet of a particular database_pr (presumed to be in the global history list) with a passed in ActiveSet (search_set).

7.1.2.15 bool Dakota::id_vars_exact_compare (const ParamResponsePair & *database_pr*, const ParamResponsePair & *search_pr*) [inline]

search function for a particular ParamResponsePair within a PRPMultiIndex

a global function to compare the interface id and variables of a particular database_pr (presumed to be in the global history list) with a passed in key of interface id and variables provided by search_pr.

7.1.2.16 PRPCacheHIter Dakota::lookup_by_val (PRPMultiIndexCache & *prp_cache*, const ParamResponsePair & *search_pr*) [inline]

ActiveSet search data within search_pr.

Lookup occurs in two steps: (1) PRPMultiIndexCache lookup based on strict equality in interface id and variables, and (2) set_compare() post-processing based on ActiveSet subset logic.

7.1.2.17 PRPQueueHIter Dakota::lookup_by_val (PRPMultiIndexQueue & *prp_queue*, const ParamResponsePair & *search_pr*) [inline]

ActiveSet search data within search_pr.

Lookup occurs in two steps: (1) PRPMultiIndexQueue lookup based on strict equality in interface id and variables, and (2) set_compare() post-processing based on ActiveSet subset logic.

7.1.2.18 void print_restart (int *argc*, char ** *argv*, String *print_dest*)

print a restart file

Usage: "dakota_restart_util print dakota.rst"

"dakota_restart_util to_neutral dakota.rst dakota.neu"

Prints all evals. in full precision to either stdout or a neutral file. The former is useful for ensuring that duplicate detection is successful in a restarted run (e.g., starting a new method from the previous best), and the latter is used for translating binary files between platforms.

7.1.2.19 void print_restart_tabular (int *argc*, char ** *argv*, String *print_dest*)

print a restart file (tabular format)

Usage: "dakota_restart_util to_pdb dakota.rst dakota.pdb"

"dakota_restart_util to_tabular dakota.rst dakota.txt"

Unrolls all data associated with a particular tag for all evaluations and then writes this data in a tabular format (e.g., to a PDB database or MATLAB/TECPLOT data file).

7.1.2.20 void read_neutral (int *argc*, char ** *argv*)

read a restart file (neutral file format)

Usage: "dakota_restart_util from_neutral dakota.neu dakota.rst"

Reads evaluations from a neutral file. This is used for translating binary files between platforms.

7.1.2.21 void repair_restart (int *argc*, char ** *argv*, String *identifier_type*)

repair a restart file by removing corrupted evaluations

Usage: "dakota_restart_util remove 0.0 dakota_old.rst dakota_new.rst"

"dakota_restart_util remove_ids 2 7 13 dakota_old.rst dakota_new.rst"

Repairs a restart file by removing corrupted evaluations. The identifier for evaluation removal can be either a double precision number (all evaluations having a matching response function value are removed) or a list of integers (all evaluations with matching evaluation ids are removed).

7.1.2.22 void concatenate_restart (int *argc*, char ** *argv*)

concatenate multiple restart files

Usage: "dakota_restart_util cat dakota_1.rst ... dakota_n.rst dakota_new.rst"

Combines multiple restart files into a single restart database.

7.1.3 Variable Documentation

7.1.3.1 const char* FIELD_NAMES[ ]

Initial value:

```
{ "numFns", "numVars", "numACV", "numADIV",
                            "numADRV", "numDerivVars", "xC", "xDI",
                            "xDR", "xCLabels", "xDILabels",
                            "xDRLabels", "directFnASV", "directFnASM",
                            "directFnDVV", "directFnDVV_bool",
                            "fnFlag", "gradFlag", "hessFlag",
                            "fnVals",  "fnGrads",  "fnHessians",
                            "fnLabels", "failure", "fnEvalId" }
```

fields to pass to Matlab in Dakota structure

7.1.3.2 const int NUMBER_OF_FIELDS = 25

number of fields in above structure

7.1.3.3 Dakota_funcs DakFuncs0

Initial value:

```
{
        fprintf,
        abort_handler,
        dlsolver_option,
        continuous_lower_bounds1,
        continuous_upper_bounds1,
        nonlinear_ineq_constraint_lower_bounds1,
        nonlinear_ineq_constraint_upper_bounds1,
        nonlinear_eq_constraint_targets1,
        linear_ineq_constraint_lower_bounds1,
        linear_ineq_constraint_upper_bounds1,
        linear_eq_constraint_targets1,
        linear_ineq_constraint_coeffs1,
        linear_eq_constraint_coeffs1,
        ComputeResponses1,
        GetFuncs1,
        GetGrads1,
        GetContVars1,
        SetBestContVars1,
        SetBestDiscVars1,
        SetBestRespFns1,
        Get_Real1,
        Get_Int1,
        Get_Bool1
        }
```

7.1.3.4 char slmap[256] [static]

Initial value:

```
{


0x0, 0x1, 0x2, 0x3, 0x4, 0x5, 0x6, 0x7, 0x8, 0x9, 0xa, 0xb, 0xc, 0xd, 0xe, 0xf,
0x10, 0x11, 0x12, 0x13, 0x14, 0x15, 0x16, 0x17, 0x18, 0x19, 0x1a, 0x1b, 0x1c, 0x1d, 0x1e, 0x1f,
0x20, 0x21, 0x22, 0x23, 0x24, 0x25, 0x26, 0x27, 0x28, 0x29, 0x2a, 0x2b, 0x2c, 0x2d, 0x2e, 0x2f,
0x30, 0x31, 0x32, 0x33, 0x34, 0x35, 0x36, 0x37, 0x38, 0x39, 0x3a, 0x3b, 0x3c, 0x3d, 0x3e, 0x3f,
0x40, 0x41, 0x42, 0x43, 0x44, 0x45, 0x46, 0x47, 0x48, 0x49, 0x4a, 0x4b, 0x4c, 0x4d, 0x4e, 0x4f,
0x50, 0x51, 0x52, 0x53, 0x54, 0x55, 0x56, 0x57, 0x58, 0x59, 0x5a, 0x5b, '/',  0x5d, 0x5e, 0x5f,
0x60, 'A',  'B',  'C',  'D',  'E',  'F',  'G',  'H',  'I',  'J',  'K',  'L',  'M',  'N',  'O',
'P',  'Q',  'R',  'S',  'T',  'U',  'V',  'W',  'X',  'Y',  'Z',  0x7b, 0x7c, 0x7d, 0x7e, 0x7f,
0x80, 0x81, 0x82, 0x83, 0x84, 0x85, 0x86, 0x87, 0x88, 0x89, 0x8a, 0x8b, 0x8c, 0x8d, 0x8e, 0x8f,
0x90, 0x91, 0x92, 0x93, 0x94, 0x95, 0x96, 0x97, 0x98, 0x99, 0x9a, 0x9b, 0x9c, 0x9d, 0x9e, 0x9f,
0xa0, 0xa1, 0xa2, 0xa3, 0xa4, 0xa5, 0xa6, 0xa7, 0xa8, 0xa9, 0xaa, 0xab, 0xac, 0xad, 0xae, 0xaf,
```

```
0xb0, 0xb1, 0xb2, 0xb3, 0xb4, 0xb5, 0xb6, 0xb7, 0xb8, 0xb9, 0xba, 0xbb, 0xbc, 0xbd, 0xbe, 0xbf,
0xc0, 0xc1, 0xc2, 0xc3, 0xc4, 0xc5, 0xc6, 0xc7, 0xc8, 0xc9, 0xca, 0xcb, 0xcc, 0xcd, 0xce, 0xcf,
0xd0, 0xd1, 0xd2, 0xd3, 0xd4, 0xd5, 0xd6, 0xd7, 0xd8, 0xd9, 0xda, 0xdb, 0xdc, 0xdd, 0xde, 0xdf,
0xe0, 0xe1, 0xe2, 0xe3, 0xe4, 0xe5, 0xe6, 0xe7, 0xe8, 0xe9, 0xea, 0xeb, 0xec, 0xed, 0xee, 0xef,
0xf0, 0xf1, 0xf2, 0xf3, 0xf4, 0xf5, 0xf6, 0xf7, 0xf8, 0xf9, 0xfa, 0xfb, 0xfc, 0xfd, 0xfe, 0xff}
```

7.1.3.5 GuiKeyWord kw_1[3] [static]

Initial value:

```
{
                {"active_set_vector",8,0,1,0,1567},
                {"evaluation_cache",8,0,2,0,1569},
                {"restart_file",8,0,3,0,1571}
                }
```

862 distinct keywords (plus 103 aliases)

7.1.3.6 GuiKeyWord kw_2[1] [static]

Initial value:

```
{
                {"processors_per_analysis",9,0,1,0,1551,0,0.,0.,0.,0,"{Number of processors per analysis} htt
                }
```

7.1.3.7 GuiKeyWord kw_3[4] [static]

Initial value:

```
{
                {"abort",8,0,1,1,1557,0,0.,0.,0.,0,"@[CHOOSE failure mitigation]"},
                {"continuation",8,0,1,1,1563},
                {"recover",14,0,1,1,1561},
                {"retry",9,0,1,1,1559}
                }
```

7.1.3.8 GuiKeyWord kw_4[2] [static]

Initial value:

```
{
                {"copy",8,0,1,0,1545,0,0.,0.,0.,0,"{Copy template files} http://www.cs.sandia.gov/dakota/lice
                {"replace",8,0,2,0,1547,0,0.,0.,0.,0,"{Replace existing files} http://www.cs.sandia.gov/dakot
                }
```

7.1.3.9 GuiKeyWord kw_5[7] [static]

Initial value:

```
{
                {"dir_save",0,0,3,0,1538},
                {"dir_tag",0,0,2,0,1536},
                {"directory_save",8,0,3,0,1539,0,0.,0.,0.,0,"{Save work directory} http://www.cs.sandia.gov/dakot
                {"directory_tag",8,0,2,0,1537,0,0.,0.,0.,0,"{Tag work directory} http://www.cs.sandia.gov/dakota/
                {"named",11,0,1,0,1535,0,0.,0.,0.,0,"{Name of work directory} http://www.cs.sandia.gov/dakota/lic
                {"template_directory",11,2,4,0,1541,kw_4,0.,0.,0.,0,"{Template directory} http://www.cs.sandia.go
                {"template_files",15,2,4,0,1543,kw_4,0.,0.,0.,0,"{Template files} http://www.cs.sandia.gov/dakota
                }
```

7.1.3.10 GuiKeyWord kw_6[8] [static]

Initial value:

```
{
                {"allow_existing_results",8,0,3,0,1523,0,0.,0.,0.,0,"{Allow existing results files} http://www.cs
                {"aprepro",8,0,5,0,1527,0,0.,0.,0.,0,"{Aprepro parameters file format} http://www.cs.sandia.gov/d
                {"file_save",8,0,7,0,1531,0,0.,0.,0.,0,"{Parameters and results file saving} http://www.cs.sandia
                {"file_tag",8,0,6,0,1529,0,0.,0.,0.,0,"{Parameters and results file tagging} http://www.cs.sandia
                {"parameters_file",11,0,1,0,1519,0,0.,0.,0.,0,"{Parameters file name} http://www.cs.sandia.gov/da
                {"results_file",11,0,2,0,1521,0,0.,0.,0.,0,"{Results file name} http://www.cs.sandia.gov/dakota/l
                {"verbatim",8,0,4,0,1525,0,0.,0.,0.,0,"{Verbatim driver/filter invocation syntax} http://www.cs.s
                {"work_directory",8,7,8,0,1533,kw_5,0.,0.,0.,0,"{Create work directory} http://www.cs.sandia.gov/
                }
```

7.1.3.11 GuiKeyWord kw_7[9] [static]

Initial value:

```
{
                {"analysis_components",15,0,1,0,1509,0,0.,0.,0.,0,"{Additional identifiers for use by the analysi
                {"deactivate",8,3,6,0,1565,kw_1,0.,0.,0.,0,"{Feature deactivation} http://www.cs.sandia.gov/dakot
                {"direct",8,1,4,1,1549,kw_2,0.,0.,0.,0,"[CHOOSE interface type]{Direct function interface } http:
                {"failure_capture",8,4,5,0,1555,kw_3,0.,0.,0.,0,"{Failure capturing} http://www.cs.sandia.gov/dak
                {"fork",8,8,4,1,1517,kw_6,0.,0.,0.,0,"@"},
                {"grid",8,0,4,1,1553,0,0.,0.,0.,0,"{Grid interface } http://www.cs.sandia.gov/dakota/licensing/vo
                {"input_filter",11,0,2,0,1511,0,0.,0.,0.,0,"{Input filter} http://www.cs.sandia.gov/dakota/licens
                {"output_filter",11,0,3,0,1513,0,0.,0.,0.,0,"{Output filter} http://www.cs.sandia.gov/dakota/lice
                {"system",8,8,4,1,1515,kw_6,0.,0.,0.,0,"{System call interface } http://www.cs.sandia.gov/dakota/
                }
```

7.1.3.12 GuiKeyWord kw_8[4] [static]

Initial value:

```
{
                {"analysis_concurrency",9,0,3,0,1581,0,0.,0.,0.,0,"{Asynchronous analysis concurrency} http://www
```

```
{"evaluation_concurrency",9,0,1,0,1575,0,0.,0.,0.,0,"{Asynchronous evaluation concurrency} ht
{"local_evaluation_self_scheduling",8,0,2,0,1577,0,0.,0.,0.,0,"{Self-schedule local evals} ht
{"local_evaluation_static_scheduling",8,0,2,0,1579,0,0.,0.,0.,0,"{Static-schedule local evals
}
```

7.1.3.13 GuiKeyWord kw_9[10] [static]

Initial value:

```
{
{"algebraic_mappings",11,0,2,0,1505,0,0.,0.,0.,0,"{Algebraic mappings file} http://www.cs.san
{"analysis_drivers",15,9,3,0,1507,kw_7,0.,0.,0.,0,"{Analysis drivers} http://www.cs.sandia.go
{"analysis_self_scheduling",8,0,8,0,1591,0,0.,0.,0.,0,"[CHOOSE analysis sched.]{Self schedul
{"analysis_servers",9,0,7,0,1589,0,0.,0.,0.,0,"{Number of analysis servers} http://www.cs.san
{"analysis_static_scheduling",8,0,8,0,1593,0,0.,0.,0.,0,"{Static scheduling of analyses} http
{"asynchronous",8,4,4,0,1573,kw_8,0.,0.,0.,0,"{Asynchronous interface usage} http://www.cs.sa
{"evaluation_self_scheduling",8,0,6,0,1585,0,0.,0.,0.,0,"[CHOOSE evaluation sched.]{Self sche
{"evaluation_servers",9,0,5,0,1583,0,0.,0.,0.,0,"{Number of evaluation servers} http://www.cs
{"evaluation_static_scheduling",8,0,6,0,1587,0,0.,0.,0.,0,"{Static scheduling of evaluations}
{"id_interface",11,0,1,0,1503,0,0.,0.,0.,0,"{Interface set identifier} http://www.cs.sandia.g
}
```

7.1.3.14 static KeyWord kw_10 [static]

Initial value:

```
{
{"merit1",8,0,1,1,259,0,0.,0.,0.,0,"[CHOOSE merit function]"},
{"merit1_smooth",8,0,1,1,261},
{"merit2",8,0,1,1,263},
{"merit2_smooth",8,0,1,1,265,0,0.,0.,0.,0,"@"},
{"merit2_squared",8,0,1,1,267},
{"merit_max",8,0,1,1,255},
{"merit_max_smooth",8,0,1,1,257}
}
```

7.1.3.15 static KeyWord kw_11 [static]

Initial value:

```
{
{"blocking",8,0,1,1,249,0,0.,0.,0.,0,"[CHOOSE synchronization]"},
{"nonblocking",8,0,1,1,251,0,0.,0.,0.,0,"@"}
}
```

7.1.3.16 static KeyWord kw_12 [static]

Initial value:

```
{
                {"constraint_penalty",10,0,7,0,269,0,0.,0.,0.,0,"{Constraint penalty} http://www.cs.sandia.gov/da
                {"contraction_factor",10,0,2,0,241,0,0.,0.,0.,0,"{Pattern contraction factor} http://www.cs.sandi
                {"initial_delta",10,0,1,0,239,0,0.,0.,0.,0,"{Initial offset value} http://www.cs.sandia.gov/dakot
                {"linear_equality_constraint_matrix",14,0,14,0,401,0,0.,0.,0.,0,"{Linear equality coefficient mat
                {"linear_equality_scale_types",15,0,16,0,405,0,0.,0.,0.,0,"{Linear equality scaling types} http:/
                {"linear_equality_scales",14,0,17,0,407,0,0.,0.,0.,0,"{Linear equality scales} http://www.cs.sand
                {"linear_equality_targets",14,0,15,0,403,0,0.,0.,0.,0,"{Linear equality targets} http://www.cs.sa
                {"linear_inequality_constraint_matrix",14,0,9,0,391,0,0.,0.,0.,0,"{Linear inequality coefficient
                {"linear_inequality_lower_bounds",14,0,10,0,393,0,0.,0.,0.,0,"{Linear inequality lower bounds} ht
                {"linear_inequality_scale_types",15,0,12,0,397,0,0.,0.,0.,0,"{Linear inequality scaling types} ht
                {"linear_inequality_scales",14,0,13,0,399,0,0.,0.,0.,0,"{Linear inequality scales} http://www.cs.
                {"linear_inequality_upper_bounds",14,0,11,0,395,0,0.,0.,0.,0,"{Linear inequality upper bounds} ht
                {"merit_function",8,7,6,0,253,kw_10,0.,0.,0.,0,"{Merit function} http://www.cs.sandia.gov/dakota/
                {"smoothing_factor",10,0,8,0,271,0,0.,0.,0.,0,"{Smoothing factor} http://www.cs.sandia.gov/dakota
                {"solution_accuracy",2,0,4,0,244},
                {"solution_target",10,0,4,0,245,0,0.,0.,0.,0,"{Solution target} http://www.cs.sandia.gov/dakota/l
                {"synchronization",8,2,5,0,247,kw_11,0.,0.,0.,0,"{Evaluation synchronization} http://www.cs.sandi
                {"threshold_delta",10,0,3,0,243,0,0.,0.,0.,0,"{Threshold for offset values} http://www.cs.sandia.
                }
```

7.1.3.17 static KeyWord kw_13 [static]

Initial value:

```
{
                {"mt19937",8,0,1,1,799},
                {"rnum2",8,0,1,1,801}
                }
```

7.1.3.18 static KeyWord kw_14 [static]

Initial value:

```
{
                {"gpmsa",8,0,1,1,795},
                {"queso",8,0,1,1,793},
                {"rng",8,2,2,0,797,kw_13},
                {"samples",9,0,7,0,863,0,0.,0.,0.,0,"{Number of samples} http://www.cs.sandia.gov/dakota/licensin
                {"seed",9,0,6,0,865,0,0.,0.,0.,0,"{Random seed} http://www.cs.sandia.gov/dakota/licensing/votd/ht
                {"x_obs_data_file",11,0,3,0,803},
                {"y_obs_data_file",11,0,4,0,805},
                {"y_std_data_file",11,0,5,0,807}
                }
```

7.1.3.19 static KeyWord kw_15 [static]

Initial value:

```
{
                {"deltas_per_variable",5,0,2,2,1046},
                {"step_vector",14,0,1,1,1045,0,0.,0.,0.,0,"{Step vector} http://www.cs.sandia.gov/dakota/licensin
                {"steps_per_variable",13,0,2,2,1047,0,0.,0.,0.,0,"{Number of steps per variable} http://www.cs.sa
                }
```

7.1.3.20 static KeyWord kw_16 [static]

Initial value:

```
{
                {"initial_delta",10,0,5,1,457,0,0.,0.,0.,0,"{Initial offset value} http://www.cs.sandia.gov/d
                {"misc_options",15,0,4,0,543,0,0.,0.,0.,0,"{Specify miscellaneous options} http://www.cs.sand
                {"seed",9,0,2,0,539,0,0.,0.,0.,0,"{Random seed for stochastic pattern search} http://www.cs.s
                {"show_misc_options",8,0,3,0,541,0,0.,0.,0.,0,"{Show miscellaneous options} http://www.cs.san
                {"solution_accuracy",2,0,1,0,536},
                {"solution_target",10,0,1,0,537,0,0.,0.,0.,0,"{Desired solution target} http://www.cs.sandia.
                {"threshold_delta",10,0,6,2,459,0,0.,0.,0.,0,"{Threshold for offset values} http://www.cs.san
                }
```

7.1.3.21 static KeyWord kw_17 [static]

Initial value:

```
{
                {"all_dimensions",8,0,1,1,467},
                {"major_dimension",8,0,1,1,465}
                }
```

7.1.3.22 static KeyWord kw_18 [static]

Initial value:

```
{
                {"constraint_penalty",10,0,6,0,477,0,0.,0.,0.,0,"{Constraint penalty} http://www.cs.sandia.go
                {"division",8,2,1,0,463,kw_17,0.,0.,0.,0,"{Box subdivision approach} http://www.cs.sandia.gov
                {"global_balance_parameter",10,0,2,0,469,0,0.,0.,0.,0,"{Global search balancing parameter} ht
                {"local_balance_parameter",10,0,3,0,471,0,0.,0.,0.,0,"{Local search balancing parameter} http
                {"max_boxsize_limit",10,0,4,0,473,0,0.,0.,0.,0,"{Maximum boxsize limit} http://www.cs.sandia.
                {"min_boxsize_limit",10,0,5,0,475,0,0.,0.,0.,0,"{Minimum boxsize limit} http://www.cs.sandia.
                {"misc_options",15,0,10,0,543,0,0.,0.,0.,0,"{Specify miscellaneous options} http://www.cs.san
                {"seed",9,0,8,0,539,0,0.,0.,0.,0,"{Random seed for stochastic pattern search} http://www.cs.s
                {"show_misc_options",8,0,9,0,541,0,0.,0.,0.,0,"{Show miscellaneous options} http://www.cs.san
                {"solution_accuracy",2,0,7,0,536},
                {"solution_target",10,0,7,0,537,0,0.,0.,0.,0,"{Desired solution target} http://www.cs.sandia.
                }
```

7.1.3.23 static KeyWord kw_19 [static]

Initial value:

```
{
                {"blend",8,0,1,1,513},
                {"two_point",8,0,1,1,511},
                {"uniform",8,0,1,1,515}
                }
```

7.1.3.24 GuiKeyWord kw_20[2] [static]

Initial value:

```
{
                {"linear_rank",8,0,1,1,493},
                {"merit_function",8,0,1,1,495}
                }
```

7.1.3.25 GuiKeyWord kw_21[3] [static]

Initial value:

```
{
                {"flat_file",11,0,1,1,489},
                {"simple_random",8,0,1,1,485},
                {"unique_random",8,0,1,1,487}
                }
```

7.1.3.26 GuiKeyWord kw_22[2] [static]

Initial value:

```
{
                {"mutation_range",9,0,2,0,531,0,0.,0.,0.,0,"{Mutation range} http://www.cs.sandia.gov/dakota/lice
                {"mutation_scale",10,0,1,0,529,0,0.,0.,0.,0,"{Mutation scale} http://www.cs.sandia.gov/dakota/lic
                }
```

7.1.3.27 static KeyWord kw_23 [static]

Initial value:

```
{
                {"non_adaptive",8,0,2,0,533,0,0.,0.,0.,0,"{Non-adaptive mutation flag} http://www.cs.sandia.gov/d
                {"offset_cauchy",8,2,1,1,525,kw_22},
                {"offset_normal",8,2,1,1,523,kw_22},
                {"offset_uniform",8,2,1,1,527,kw_22},
                {"replace_uniform",8,0,1,1,521}
                }
```

7.1.3.28 static KeyWord kw_24 [static]

Initial value:

```
{
                {"chc",9,0,1,1,501,0,0.,0.,0.,0,"{CHC replacement type} http://www.cs.sandia.gov/dakota/licensing
                {"elitist",9,0,1,1,503,0,0.,0.,0.,0,"{Elitist replacement type} http://www.cs.sandia.gov/dakota/l
                {"new_solutions_generated",9,0,2,0,505,0,0.,0.,0.,0,"{New solutions generated} http://www.cs.sand
                {"random",9,0,1,1,499,0,0.,0.,0.,0,"{Random replacement type} http://www.cs.sandia.gov/dakota/lic
                }
```

7.1.3.29 static KeyWord kw_25 [static]

Initial value:

```
{
                {"constraint_penalty",10,0,9,0,535},
                {"crossover_rate",10,0,5,0,507,0,0.,0.,0.,0,"{Crossover rate} http://www.cs.sandia.gov/dakota
                {"crossover_type",8,3,6,0,509,kw_19,0.,0.,0.,0,"{Crossover type} http://www.cs.sandia.gov/dak
                {"fitness_type",8,2,3,0,491,kw_20,0.,0.,0.,0,"{Fitness type} http://www.cs.sandia.gov/dakota/
                {"initialization_type",8,3,2,0,483,kw_21,0.,0.,0.,0,"{Initialization type} http://www.cs.sand
                {"misc_options",15,0,13,0,543,0,0.,0.,0.,0,"{Specify miscellaneous options} http://www.cs.san
                {"mutation_rate",10,0,7,0,517,0,0.,0.,0.,0,"{Mutation rate} http://www.cs.sandia.gov/dakota/l
                {"mutation_type",8,5,8,0,519,kw_23,0.,0.,0.,0,"{Mutation type} http://www.cs.sandia.gov/dakot
                {"population_size",9,0,1,0,481,0,0.,0.,0.,0,"{Number of population members} http://www.cs.san
                {"replacement_type",8,4,4,0,497,kw_24,0.,0.,0.,0,"{Replacement type} http://www.cs.sandia.gov
                {"seed",9,0,11,0,539,0,0.,0.,0.,0,"{Random seed for stochastic pattern search} http://www.cs.
                {"show_misc_options",8,0,12,0,541,0,0.,0.,0.,0,"{Show miscellaneous options} http://www.cs.sa
                {"solution_accuracy",2,0,10,0,536},
                {"solution_target",10,0,10,0,537,0,0.,0.,0.,0,"{Desired solution target} http://www.cs.sandia
                }
```

7.1.3.30 GuiKeyWord kw_26[3] [static]

Initial value:

```
{
                {"adaptive_pattern",8,0,1,1,431},
                {"basic_pattern",8,0,1,1,433},
                {"multi_step",8,0,1,1,429}
                }
```

7.1.3.31 GuiKeyWord kw_27[2] [static]

Initial value:

```
{
                {"coordinate",8,0,1,1,419},
                {"simplex",8,0,1,1,421}
                }
```

7.1.3.32 static KeyWord kw_28 [static]

Initial value:

```
{
                {"blocking",8,0,1,1,437},
                {"nonblocking",8,0,1,1,439}
                }
```

7.1.3.33 static KeyWord kw_29 [static]

Initial value:

```
{
                {"constant_penalty",8,0,1,0,411,0,0.,0.,0.,0,"{Control of dynamic penalty} http://www.cs.sandia.g
                {"constraint_penalty",10,0,16,0,453,0,0.,0.,0.,0,"{Constraint penalty} http://www.cs.sandia.gov/d
                {"contraction_factor",10,0,15,0,451,0,0.,0.,0.,0,"{Pattern contraction factor} http://www.cs.sand
                {"expand_after_success",9,0,3,0,415,0,0.,0.,0.,0,"{Number of consecutive improvements before expa
                {"exploratory_moves",8,3,7,0,427,kw_26,0.,0.,0.,0,"{Exploratory moves selection} http://www.cs.sa
                {"initial_delta",10,0,13,1,457,0,0.,0.,0.,0,"{Initial offset value} http://www.cs.sandia.gov/dako
                {"misc_options",15,0,12,0,543,0,0.,0.,0.,0,"{Specify miscellaneous options} http://www.cs.sandia.
                {"no_expansion",8,0,2,0,413,0,0.,0.,0.,0,"{No expansion flag} http://www.cs.sandia.gov/dakota/lic
                {"pattern_basis",8,2,4,0,417,kw_27,0.,0.,0.,0,"{Pattern basis selection} http://www.cs.sandia.gov
                {"seed",9,0,10,0,539,0,0.,0.,0.,0,"{Random seed for stochastic pattern search} http://www.cs.sand
                {"show_misc_options",8,0,11,0,541,0,0.,0.,0.,0,"{Show miscellaneous options} http://www.cs.sandia
                {"solution_accuracy",2,0,9,0,536},
                {"solution_target",10,0,9,0,537,0,0.,0.,0.,0,"{Desired solution target} http://www.cs.sandia.gov/
                {"stochastic",8,0,5,0,423,0,0.,0.,0.,0,"{Stochastic pattern search} http://www.cs.sandia.gov/dako
                {"synchronization",8,2,8,0,435,kw_28,0.,0.,0.,0,"{Evaluation synchronization} http://www.cs.sandi
                {"threshold_delta",10,0,14,2,459,0,0.,0.,0.,0,"{Threshold for offset values} http://www.cs.sandia
                {"total_pattern_size",9,0,6,0,425,0,0.,0.,0.,0,"{Total number of points in pattern} http://www.cs
                }
```

7.1.3.34 static KeyWord kw_30 [static]

Initial value:

```
{
                {"constant_penalty",8,0,4,0,449,0,0.,0.,0.,0,"{Control of dynamic penalty} http://www.cs.sandia.g
                {"constraint_penalty",10,0,12,0,453,0,0.,0.,0.,0,"{Constraint penalty} http://www.cs.sandia.gov/d
                {"contract_after_failure",9,0,1,0,443,0,0.,0.,0.,0,"{Number of consecutive failures before contra
                {"contraction_factor",10,0,11,0,451,0,0.,0.,0.,0,"{Pattern contraction factor} http://www.cs.sand
                {"expand_after_success",9,0,3,0,447,0,0.,0.,0.,0,"{Number of consecutive improvements before expa
                {"initial_delta",10,0,9,1,457,0,0.,0.,0.,0,"{Initial offset value} http://www.cs.sandia.gov/dakot
                {"misc_options",15,0,8,0,543,0,0.,0.,0.,0,"{Specify miscellaneous options} http://www.cs.sandia.g
                {"no_expansion",8,0,2,0,445,0,0.,0.,0.,0,"{No expansion flag} http://www.cs.sandia.gov/dakota/lic
                {"seed",9,0,6,0,539,0,0.,0.,0.,0,"{Random seed for stochastic pattern search} http://www.cs.sandi
                {"show_misc_options",8,0,7,0,541,0,0.,0.,0.,0,"{Show miscellaneous options} http://www.cs.sandia.
                {"solution_accuracy",2,0,5,0,536},
                {"solution_target",10,0,5,0,537,0,0.,0.,0.,0,"{Desired solution target} http://www.cs.sandia.gov/
                {"threshold_delta",10,0,10,2,459,0,0.,0.,0.,0,"{Threshold for offset values} http://www.cs.sandia
                }
```

7.1.3.35 static KeyWord kw_31 [static]

Initial value:

```
{
                {"linear_equality_constraint_matrix",14,0,14,0,401,0,0.,0.,0.,0,"{Linear equality coefficient mat
                {"linear_equality_scale_types",15,0,16,0,405,0,0.,0.,0.,0,"{Linear equality scaling types} http:/
                {"linear_equality_scales",14,0,17,0,407,0,0.,0.,0.,0,"{Linear equality scales} http://www.cs.sand
                {"linear_equality_targets",14,0,15,0,403,0,0.,0.,0.,0,"{Linear equality targets} http://www.cs.sa
                {"linear_inequality_constraint_matrix",14,0,9,0,391,0,0.,0.,0.,0,"{Linear inequality coefficient
```

```
                {"linear_inequality_lower_bounds",14,0,10,0,393,0,0.,0.,0.,0,"{Linear inequality lower bounds
                {"linear_inequality_scale_types",15,0,12,0,397,0,0.,0.,0.,0,"{Linear inequality scaling types
                {"linear_inequality_scales",14,0,13,0,399,0,0.,0.,0.,0,"{Linear inequality scales} http://www
                {"linear_inequality_upper_bounds",14,0,11,0,395,0,0.,0.,0.,0,"{Linear inequality upper bounds
                }
```

7.1.3.36 static KeyWord kw_32 [static]

Initial value:

```
{
                {"drop_tolerance",10,0,1,0,831}
                }
```

7.1.3.37 static KeyWord kw_33 [static]

Initial value:

```
{
                {"box_behnken",8,0,1,1,821,0,0.,0.,0.,0,"[CHOOSE DACE type]"},
                {"central_composite",8,0,1,1,823},
                {"fixed_seed",8,0,5,0,833,0,0.,0.,0.,0,"{Fixed seed flag} http://www.cs.sandia.gov/dakota/lic
                {"grid",8,0,1,1,811},
                {"lhs",8,0,1,1,817},
                {"main_effects",8,0,2,0,825,0,0.,0.,0.,0,"{Main effects} http://www.cs.sandia.gov/dakota/lice
                {"oa_lhs",8,0,1,1,819},
                {"oas",8,0,1,1,815},
                {"quality_metrics",8,0,3,0,827,0,0.,0.,0.,0,"{Quality metrics} http://www.cs.sandia.gov/dakot
                {"random",8,0,1,1,813},
                {"samples",9,0,8,0,863,0,0.,0.,0.,0,"{Number of samples} http://www.cs.sandia.gov/dakota/lice
                {"seed",9,0,7,0,865,0,0.,0.,0.,0,"{Random seed} http://www.cs.sandia.gov/dakota/licensing/vot
                {"symbols",9,0,6,0,835,0,0.,0.,0.,0,"{Number of symbols} http://www.cs.sandia.gov/dakota/lice
                {"variance_based_decomp",8,1,4,0,829,kw_32,0.,0.,0.,0,"{Variance based decomposition} http://
                }
```

7.1.3.38 GuiKeyWord kw_34[2] [static]

Initial value:

```
{
                {"maximize",8,0,1,1,175},
                {"minimize",8,0,1,1,173}
                }
```

7.1.3.39 static KeyWord kw_35 [static]

Initial value:

```
{
                {"bfgs",8,0,1,1,165},
                {"frcg",8,0,1,1,161},
                {"linear_equality_constraint_matrix",14,0,7,0,401,0,0.,0.,0.,0,"{Linear equality coefficient matr
                {"linear_equality_scale_types",15,0,9,0,405,0,0.,0.,0.,0,"{Linear equality scaling types} http://
                {"linear_equality_scales",14,0,10,0,407,0,0.,0.,0.,0,"{Linear equality scales} http://www.cs.sand
                {"linear_equality_targets",14,0,8,0,403,0,0.,0.,0.,0,"{Linear equality targets} http://www.cs.san
                {"linear_inequality_constraint_matrix",14,0,2,0,391,0,0.,0.,0.,0,"{Linear inequality coefficient
                {"linear_inequality_lower_bounds",14,0,3,0,393,0,0.,0.,0.,0,"{Linear inequality lower bounds} htt
                {"linear_inequality_scale_types",15,0,5,0,397,0,0.,0.,0.,0,"{Linear inequality scaling types} htt
                {"linear_inequality_scales",14,0,6,0,399,0,0.,0.,0.,0,"{Linear inequality scales} http://www.cs.s
                {"linear_inequality_upper_bounds",14,0,4,0,395,0,0.,0.,0.,0,"{Linear inequality upper bounds} htt
                {"mmfd",8,0,1,1,163},
                {"optimization_type",8,2,11,0,171,kw_34,0.,0.,0.,0,"{Optimization type} http://www.cs.sandia.gov/
                {"slp",8,0,1,1,167},
                {"sqp",8,0,1,1,169}
                }
```

7.1.3.40 static KeyWord kw_36 [static]

Initial value:

```
{
                {"linear_equality_constraint_matrix",14,0,6,0,401,0,0.,0.,0.,0,"{Linear equality coefficient matr
                {"linear_equality_scale_types",15,0,8,0,405,0,0.,0.,0.,0,"{Linear equality scaling types} http://
                {"linear_equality_scales",14,0,9,0,407,0,0.,0.,0.,0,"{Linear equality scales} http://www.cs.sandi
                {"linear_equality_targets",14,0,7,0,403,0,0.,0.,0.,0,"{Linear equality targets} http://www.cs.san
                {"linear_inequality_constraint_matrix",14,0,1,0,391,0,0.,0.,0.,0,"{Linear inequality coefficient
                {"linear_inequality_lower_bounds",14,0,2,0,393,0,0.,0.,0.,0,"{Linear inequality lower bounds} htt
                {"linear_inequality_scale_types",15,0,4,0,397,0,0.,0.,0.,0,"{Linear inequality scaling types} htt
                {"linear_inequality_scales",14,0,5,0,399,0,0.,0.,0.,0,"{Linear inequality scales} http://www.cs.s
                {"linear_inequality_upper_bounds",14,0,3,0,395,0,0.,0.,0.,0,"{Linear inequality upper bounds} htt
                {"optimization_type",8,2,10,0,171,kw_34,0.,0.,0.,0,"{Optimization type} http://www.cs.sandia.gov/
                }
```

7.1.3.41 GuiKeyWord kw_37[1] [static]

Initial value:

```
{
                {"seed",9,0,7,0,865,0,0.,0.,0.,0,"{Random seed} http://www.cs.sandia.gov/dakota/licensing/votd/ht
                }
```

7.1.3.42 static KeyWord kw_38 [static]

Initial value:

```
{
                {"grid",8,0,1,1,851,0,0.,0.,0.,0,"[CHOOSE trial type]"},
                {"halton",8,0,1,1,853},
                {"random",8,0,1,1,855,0,0.,0.,0.,0,"@"}
                }
```

7.1.3.43 static KeyWord kw_39 [static]

Initial value:

```
{
                {"drop_tolerance",10,0,1,0,845}
                }
```

7.1.3.44 static KeyWord kw_40 [static]

Initial value:

```
{
                {"fixed_seed",8,0,4,0,847,0,0.,0.,0.,0,"{Fixed seed flag} http://www.cs.sandia.gov/dakota/lic
                {"latinize",8,0,1,0,839,0,0.,0.,0.,0,"{Latinization of samples} http://www.cs.sandia.gov/dako
                {"num_trials",9,0,6,0,857,0,0.,0.,0.,0,"{Number of trials  } http://www.cs.sandia.gov/dakota/
                {"quality_metrics",8,0,2,0,841,0,0.,0.,0.,0,"{Quality metrics} http://www.cs.sandia.gov/dakot
                {"samples",9,0,8,0,863,0,0.,0.,0.,0,"{Number of samples} http://www.cs.sandia.gov/dakota/lice
                {"seed",9,0,7,0,865,0,0.,0.,0.,0,"{Random seed} http://www.cs.sandia.gov/dakota/licensing/vot
                {"trial_type",8,3,5,0,849,kw_38,0.,0.,0.,0,"{Trial type} http://www.cs.sandia.gov/dakota/lice
                {"variance_based_decomp",8,1,3,0,843,kw_39,0.,0.,0.,0,"{Variance based decomposition} http://
                }
```

7.1.3.45 static KeyWord kw_41 [static]

Initial value:

```
{
                {"drop_tolerance",10,0,1,0,1019}
                }
```

7.1.3.46 static KeyWord kw_42 [static]

Initial value:

```
{
                {"fixed_sequence",8,0,6,0,1023,0,0.,0.,0.,0,"{Fixed sequence flag} http://www.cs.sandia.gov/d
                {"halton",8,0,1,1,1009,0,0.,0.,0.,0,"[CHOOSE sequence type]"},
                {"hammersley",8,0,1,1,1011},
                {"latinize",8,0,2,0,1013,0,0.,0.,0.,0,"{Latinization of samples} http://www.cs.sandia.gov/dak
                {"prime_base",13,0,9,0,1029,0,0.,0.,0.,0,"{Prime bases for sequences} http://www.cs.sandia.go
                {"quality_metrics",8,0,3,0,1015,0,0.,0.,0.,0,"{Quality metrics} http://www.cs.sandia.gov/dako
                {"samples",9,0,5,0,1021,0,0.,0.,0.,0,"{Number of samples} http://www.cs.sandia.gov/dakota/lic
                {"sequence_leap",13,0,8,0,1027,0,0.,0.,0.,0,"{Sequence leaping indices} http://www.cs.sandia.
                {"sequence_start",13,0,7,0,1025,0,0.,0.,0.,0,"{Sequence starting indices} http://www.cs.sandi
                {"variance_based_decomp",8,1,4,0,1017,kw_41,0.,0.,0.,0,"{Variance based decomposition} http:/
                }
```

7.1.3.47 static KeyWord kw_43 [static]

Initial value:

```
{
                {"complementary",8,0,1,1,763},
                {"cumulative",8,0,1,1,761}
                }
```

7.1.3.48 GuiKeyWord kw_44[1] [static]

Initial value:

```
{
                {"num_gen_reliability_levels",13,0,1,0,771,0,0.,0.,0.,0,"{Number of generalized reliability level
                }
```

7.1.3.49 static KeyWord kw_45 [static]

Initial value:

```
{
                {"num_probability_levels",13,0,1,0,767,0,0.,0.,0.,0,"{Number of probability levels} http://www.cs
                }
```

7.1.3.50 static KeyWord kw_46 [static]

Initial value:

```
{
                {"mt19937",8,0,1,1,775},
                {"rnum2",8,0,1,1,777}
                }
```

7.1.3.51 static KeyWord kw_47 [static]

Initial value:

```
{
                {"gen_reliabilities",8,0,1,1,757},
                {"probabilities",8,0,1,1,755}
                }
```

7.1.3.52 GuiKeyWord kw_48[2] [static]

Initial value:

```
{
                {"compute",8,2,2,0,753,kw_47},
                {"num_response_levels",13,0,1,0,751}
                }
```

7.1.3.53 static KeyWord kw_49 [static]

Initial value:

```
{
                {"distribution",8,2,5,0,759,kw_43,0.,0.,0.,0,"{Distribution type} http://www.cs.sandia.gov/dai
                {"ego",8,0,1,0,747},
                {"gen_reliability_levels",14,1,7,0,769,kw_44,0.,0.,0.,0,"{Generalized reliability levels} htt
                {"lhs",8,0,1,0,745},
                {"probability_levels",14,1,6,0,765,kw_45,0.,0.,0.,0,"{Probability levels} http://www.cs.sandi
                {"response_levels",14,2,2,0,749,kw_48},
                {"rng",8,2,8,0,773,kw_46,0.,0.,0.,0,"{Random number generator} http://www.cs.sandia.gov/dakot
                {"samples",9,0,4,0,863,0,0.,0.,0.,0,"{Number of samples} http://www.cs.sandia.gov/dakota/lice
                {"seed",9,0,3,0,865,0,0.,0.,0.,0,"{Random seed} http://www.cs.sandia.gov/dakota/licensing/vot
                }
```

7.1.3.54 static KeyWord kw_50 [static]

Initial value:

```
{
                {"mt19937",8,0,1,1,787},
                {"rnum2",8,0,1,1,789}
                }
```

7.1.3.55 static KeyWord kw_51 [static]

Initial value:

```
{
                {"ego",8,0,1,0,783},
                {"lhs",8,0,1,0,781},
                {"rng",8,2,2,0,785,kw_50,0.,0.,0.,0,"{Random seed generator} http://www.cs.sandia.gov/dakota/
                {"samples",9,0,4,0,863,0,0.,0.,0.,0,"{Number of samples} http://www.cs.sandia.gov/dakota/lice
                {"seed",9,0,3,0,865,0,0.,0.,0.,0,"{Random seed} http://www.cs.sandia.gov/dakota/licensing/vot
                }
```

7.1.3.56 static KeyWord kw_52 [static]

Initial value:

```
{
                {"complementary",8,0,1,1,997},
                {"cumulative",8,0,1,1,995}
                }
```

7.1.3.57 static KeyWord kw_53 [static]

Initial value:

```
{
                {"num_gen_reliability_levels",13,0,1,0,1005}
                }
```

7.1.3.58 static KeyWord kw_54 [static]

Initial value:

```
{
                {"num_probability_levels",13,0,1,0,1001}
                }
```

7.1.3.59 static KeyWord kw_55 [static]

Initial value:

```
{
                {"gen_reliabilities",8,0,1,1,991},
                {"probabilities",8,0,1,1,989}
                }
```

7.1.3.60 GuiKeyWord kw_56[2] [static]

Initial value:

```
{
                {"compute",8,2,2,0,987,kw_55},
                {"num_response_levels",13,0,1,0,985}
                }
```

7.1.3.61 static KeyWord kw_57 [static]

Initial value:

```
{
                {"mt19937",8,0,1,1,979},
                {"rnum2",8,0,1,1,981}
                }
```

7.1.3.62 static KeyWord kw_58 [static]

Initial value:

```
{
                {"all_variables",8,0,2,0,973,0,0.,0.,0.,0,"{All variables flag} http://www.cs.sandia.gov/dako
                {"distribution",8,2,6,0,993,kw_52},
                {"gen_reliability_levels",14,1,8,0,1003,kw_53},
                {"probability_levels",14,1,7,0,999,kw_54},
                {"response_levels",14,2,5,0,983,kw_56},
                {"rng",8,2,4,0,977,kw_57},
                {"seed",9,0,3,0,975,0,0.,0.,0.,0,"{Random seed for initial GP construction} http://www.cs.san
                {"u_gaussian_process",8,0,1,1,971},
                {"x_gaussian_process",8,0,1,1,969}
                }
```

7.1.3.63 static KeyWord kw_59 [static]

Initial value:

```
{
                {"gen_reliabilities",8,0,1,1,741},
                {"probabilities",8,0,1,1,739}
                }
```

7.1.3.64 static KeyWord kw_60 [static]

Initial value:

```
{
                {"compute",8,2,2,0,737,kw_59},
                {"num_response_levels",13,0,1,0,735}
                }
```

7.1.3.65 static KeyWord kw_61 [static]

Initial value:

```
{
                {"distribution",8,2,4,0,759,kw_43,0.,0.,0.,0,"{Distribution type} http://www.cs.sandia.gov/dakota
                {"gen_reliability_levels",14,1,6,0,769,kw_44,0.,0.,0.,0,"{Generalized reliability levels} http://
                {"probability_levels",14,1,5,0,765,kw_45,0.,0.,0.,0,"{Probability levels} http://www.cs.sandia.go
                {"response_levels",14,2,1,0,733,kw_60},
                {"rng",8,2,7,0,773,kw_46,0.,0.,0.,0,"{Random number generator} http://www.cs.sandia.gov/dakota/li
                {"samples",9,0,3,0,863,0,0.,0.,0.,0,"{Number of samples} http://www.cs.sandia.gov/dakota/licensin
                {"seed",9,0,2,0,865,0,0.,0.,0.,0,"{Random seed} http://www.cs.sandia.gov/dakota/licensing/votd/ht
                }
```

7.1.3.66 static KeyWord kw_62 [static]

Initial value:

```
{
                {"list_of_points",14,0,1,1,1041,0,0.,0.,0.,0,"{List of points to evaluate} http://www.cs.sandia.g
                }
```

7.1.3.67 GuiKeyWord kw_63[2] [static]

Initial value:

```
{
                {"complementary",8,0,1,1,903},
                {"cumulative",8,0,1,1,901}
                }
```

7.1.3.68 static KeyWord kw_64 [static]

Initial value:

```
{
                {"num_gen_reliability_levels",13,0,1,0,897}
                }
```

7.1.3.69 static KeyWord kw_65 [static]

Initial value:

```
{
                {"num_probability_levels",13,0,1,0,893}
                }
```

7.1.3.70 GuiKeyWord kw_66[2] [static]

Initial value:

```
{
                {"gen_reliabilities",8,0,1,1,889},
                {"probabilities",8,0,1,1,887}
                }
```

7.1.3.71 GuiKeyWord kw_67[2] [static]

Initial value:

```
{
                {"compute",8,2,2,0,885,kw_66},
                {"num_response_levels",13,0,1,0,883}
                }
```

7.1.3.72 static KeyWord kw_68 [static]

Initial value:

```
{
                {"distribution",8,2,5,0,899,kw_63},
                {"gen_reliability_levels",14,1,4,0,895,kw_64},
                {"nip",8,0,1,0,879},
                {"probability_levels",14,1,3,0,891,kw_65},
                {"response_levels",14,2,2,0,881,kw_67},
                {"sqp",8,0,1,0,877}
                }
```

7.1.3.73 static KeyWord kw_69 [static]

Initial value:

```
{
                {"nip",8,0,1,0,909},
                {"sqp",8,0,1,0,907}
                }
```

7.1.3.74 static KeyWord kw_70 [static]

Initial value:

```
{
                {"adapt_import",8,0,1,1,943},
                {"import",8,0,1,1,941},
                {"mm_adapt_import",8,0,1,1,945},
                {"samples",9,0,2,0,947,0,0.,0.,0.,0,"{Refinement samples} http://www.cs.sandia.gov/dakota/lic
                {"seed",9,0,3,0,949,0,0.,0.,0.,0,"{Refinement seed} http://www.cs.sandia.gov/dakota/licensing
                }
```

7.1.3.75 static KeyWord kw_71 [static]

Initial value:

```
{
                {"first_order",8,0,1,1,935},
                {"sample_refinement",8,5,2,0,939,kw_70},
                {"second_order",8,0,1,1,937}
                }
```

7.1.3.76 static KeyWord kw_72 [static]

Initial value:

```
{
                {"nip",8,0,2,0,931},
                {"no_approx",8,0,1,1,927},
                {"sqp",8,0,2,0,929},
                {"u_taylor_mean",8,0,1,1,917},
                {"u_taylor_mpp",8,0,1,1,921},
                {"u_two_point",8,0,1,1,925},
                {"x_taylor_mean",8,0,1,1,915},
                {"x_taylor_mpp",8,0,1,1,919},
                {"x_two_point",8,0,1,1,923}
                }
```

7.1.3.77 static KeyWord kw_73 [static]

Initial value:

```
{
                {"num_reliability_levels",13,0,1,0,965}
                }
```

7.1.3.78 static KeyWord kw_74 [static]

Initial value:

```
{
                {"gen_reliabilities",8,0,1,1,961},
                {"probabilities",8,0,1,1,957},
                {"reliabilities",8,0,1,1,959}
                }
```

7.1.3.79 static KeyWord kw_75 [static]

Initial value:

```
{
                {"compute",8,3,2,0,955,kw_74},
                {"num_response_levels",13,0,1,0,953}
                }
```

7.1.3.80 static KeyWord kw_76 [static]

Initial value:

```
{
                {"distribution",8,2,5,0,993,kw_52},
                {"gen_reliability_levels",14,1,7,0,1003,kw_53},
                {"integration",8,3,2,0,933,kw_71,0.,0.,0.,0,"{Integration method} http://www.cs.sandia.gov/dak
                {"mpp_search",8,9,1,0,913,kw_72,0.,0.,0.,0,"{MPP search type} http://www.cs.sandia.gov/dakota
                {"probability_levels",14,1,6,0,999,kw_54},
                {"reliability_levels",14,1,4,0,963,kw_73},
                {"response_levels",14,2,3,0,951,kw_75}
                }
```

7.1.3.81 static KeyWord kw_77 [static]

Initial value:

```
{
                {"num_offspring",0x19,0,2,0,369,0,0.,0.,0.,0,"{Number of offspring in random shuffle crossove
                {"num_parents",0x19,0,1,0,367,0,0.,0.,0.,0,"{Number of parents in random shuffle crossover} h
                }
```

7.1.3.82 static KeyWord kw_78 [static]

Initial value:

```
{
                {"crossover_rate",10,0,2,0,371,0,0.,0.,0.,0,"{Crossover rate} http://www.cs.sandia.gov/dakota
                {"multi_point_binary",9,0,1,1,359,0,0.,0.,0.,0,"{Multi point binary crossover} http://www.cs.
                {"multi_point_parameterized_binary",9,0,1,1,361,0,0.,0.,0.,0,"{Multi point parameterized bina
                {"multi_point_real",9,0,1,1,363,0,0.,0.,0.,0,"{Multi point real crossover} http://www.cs.sand
                {"shuffle_random",8,2,1,1,365,kw_77,0.,0.,0.,0,"{Random shuffle crossover} http://www.cs.sand
                }
```

7.1.3.83 static KeyWord kw_79 [static]

Initial value:

```
{
                {"flat_file",11,0,1,1,355},
                {"simple_random",8,0,1,1,351},
                {"unique_random",8,0,1,1,353}
                }
```

7.1.3.84 GuiKeyWord kw_80[1] [static]

Initial value:

```
{
                {"mutation_scale",10,0,1,0,385,0,0.,0.,0.,0,"{Mutation scale} http://www.cs.sandia.gov/dakota/lic
                }
```

7.1.3.85 static KeyWord kw_81 [static]

Initial value:

```
{
                {"bit_random",8,0,1,1,375},
                {"mutation_rate",10,0,2,0,387,0,0.,0.,0.,0,"{Mutation rate} http://www.cs.sandia.gov/dakota/licen
                {"offset_cauchy",8,1,1,1,381,kw_80},
                {"offset_normal",8,1,1,1,379,kw_80},
                {"offset_uniform",8,1,1,1,383,kw_80},
                {"replace_uniform",8,0,1,1,377}
                }
```

7.1.3.86 static KeyWord kw_82 [static]

Initial value:

```
{
                {"metric_tracker",8,0,1,1,301,0,0.,0.,0.,0,"{Convergence type} http://www.cs.sandia.gov/dakota/li
                {"num_generations",0x29,0,3,0,305,0,0.,0.,0.,0,"{Number generations for metric_tracker converger}
                {"percent_change",10,0,2,0,303,0,0.,0.,0.,0,"{Percent change limit for metric_tracker converger}
                }
```

7.1.3.87 static KeyWord kw_83 [static]

Initial value:

```
{
                {"domination_count",8,0,1,1,279},
                {"layer_rank",8,0,1,1,277}
                }
```

7.1.3.88 GuiKeyWord kw_84[2] [static]

Initial value:

```
{
                {"distance",14,0,1,1,297},
                {"radial",14,0,1,1,295}
                }
```

7.1.3.89 static KeyWord kw_85 [static]

Initial value:

```
{
                {"orthogonal_distance",14,0,1,1,309,0,0.,0.,0.,0,"{Post_processor distance} http://www.cs.san
                }
```

7.1.3.90 static KeyWord kw_86 [static]

Initial value:

```
{
                {"shrinkage_fraction",10,0,1,0,291},
                {"shrinkage_percentage",2,0,1,0,290}
                }
```

7.1.3.91 static KeyWord kw_87 [static]

Initial value:

```
{
                {"below_limit",10,2,1,1,289,kw_86,0.,0.,0.,0,"{Below limit selection} http://www.cs.sandia.go
                {"elitist",8,0,1,1,283},
                {"roulette_wheel",8,0,1,1,285},
                {"unique_roulette_wheel",8,0,1,1,287}
                }
```

7.1.3.92 static KeyWord kw_88 [static]

Initial value:

```
{
                {"convergence_type",8,3,4,0,299,kw_82},
                {"crossover_type",8,5,19,0,357,kw_78,0.,0.,0.,0,"{Crossover type} http://www.cs.sandia.gov/da
                {"fitness_type",8,2,1,0,275,kw_83,0.,0.,0.,0,"{Fitness type} http://www.cs.sandia.gov/dakota/
                {"initialization_type",8,3,18,0,349,kw_79,0.,0.,0.,0,"{Initialization type} http://www.cs.san
                {"linear_equality_constraint_matrix",14,0,11,0,401,0,0.,0.,0.,0,"{Linear equality coefficient
                {"linear_equality_scale_types",15,0,13,0,405,0,0.,0.,0.,0,"{Linear equality scaling types} ht
                {"linear_equality_scales",14,0,14,0,407,0,0.,0.,0.,0,"{Linear equality scales} http://www.cs.
                {"linear_equality_targets",14,0,12,0,403,0,0.,0.,0.,0,"{Linear equality targets} http://www.c
                {"linear_inequality_constraint_matrix",14,0,6,0,391,0,0.,0.,0.,0,"{Linear inequality coeffici
                {"linear_inequality_lower_bounds",14,0,7,0,393,0,0.,0.,0.,0,"{Linear inequality lower bounds}
                {"linear_inequality_scale_types",15,0,9,0,397,0,0.,0.,0.,0,"{Linear inequality scaling types}
                {"linear_inequality_scales",14,0,10,0,399,0,0.,0.,0.,0,"{Linear inequality scales} http://www
                {"linear_inequality_upper_bounds",14,0,8,0,395,0,0.,0.,0.,0,"{Linear inequality upper bounds}
                {"log_file",11,0,16,0,345,0,0.,0.,0.,0,"{Log file} http://www.cs.sandia.gov/dakota/licensing/
                {"mutation_type",8,6,20,0,373,kw_81,0.,0.,0.,0,"{Mutation type} http://www.cs.sandia.gov/dako
                {"niching_type",8,2,3,0,293,kw_84,0.,0.,0.,0,"{Niche pressure type} http://www.cs.sandia.gov/
                {"population_size",9,0,15,0,343,0,0.,0.,0.,0,"{Number of population members} http://www.cs.sa
                {"postprocessor_type",8,1,5,0,307,kw_85,0.,0.,0.,0,"{Post_processor type} http://www.cs.sandi
```

```
                {"print_each_pop",8,0,17,0,347,0,0.,0.,0.,0,"{Population output} http://www.cs.sandia.gov/dakota/
                {"replacement_type",8,4,2,0,281,kw_87,0.,0.,0.,0,"{Replacement type} http://www.cs.sandia.gov/dak
                {"seed",9,0,21,0,389,0,0.,0.,0.,0,"{Random seed} http://www.cs.sandia.gov/dakota/licensing/votd/h
                }
```

7.1.3.93 static KeyWord kw_89 [static]

Initial value:

```
{
                {"partitions",13,0,1,1,1051,0,0.,0.,0.,0,"{Partitions per variable} http://www.cs.sandia.gov/dako
                }
```

7.1.3.94 static KeyWord kw_90 [static]

Initial value:

```
{
                {"min_boxsize_limit",10,0,2,0,871,0,0.,0.,0.,0,"{Min boxsize limit} http://www.cs.sandia.gov/dako
                {"solution_accuracy",2,0,1,0,868},
                {"solution_target",10,0,1,0,869,0,0.,0.,0.,0,"{Solution Target } http://www.cs.sandia.gov/dakota/
                {"volume_boxsize_limit",10,0,3,0,873}
                }
```

7.1.3.95 static KeyWord kw_91 [static]

Initial value:

```
{
                {"absolute_conv_tol",10,0,2,0,549,0,0.,0.,0.,0,"{Absolute function convergence tolerance} http://
                {"covariance",9,0,8,0,561,0,0.,0.,0.,0,"{Covariance post-processing} http://www.cs.sandia.gov/dak
                {"false_conv_tol",10,0,6,0,557,0,0.,0.,0.,0,"{False convergence tolerance} http://www.cs.sandia.g
                {"function_precision",10,0,1,0,547,0,0.,0.,0.,0,"{Relative precision in least squares terms} http
                {"initial_trust_radius",10,0,7,0,559,0,0.,0.,0.,0,"{Initial trust region radius} http://www.cs.sa
                {"regression_diagnostics",8,0,9,0,563,0,0.,0.,0.,0,"{Regression diagnostics post-processing} http
                {"singular_conv_tol",10,0,4,0,553,0,0.,0.,0.,0,"{Singular convergence tolerance} http://www.cs.sa
                {"singular_radius",10,0,5,0,555,0,0.,0.,0.,0,"{Step limit for sctol} http://www.cs.sandia.gov/dak
                {"x_conv_tol",10,0,3,0,551,0,0.,0.,0.,0,"{Convergence tolerance for change in parameter vector} h
                }
```

7.1.3.96 static KeyWord kw_92 [static]

Initial value:

```
{
                {"num_reliability_levels",13,0,1,0,717,0,0.,0.,0.,0,"{Number of reliability levels} http://www.cs
                }
```

7.1.3.97 static KeyWord kw_93 [static]

Initial value:

```
{
                {"gen_reliabilities",8,0,1,1,729},
                {"probabilities",8,0,1,1,725},
                {"reliabilities",8,0,1,1,727}
                }
```

7.1.3.98 GuiKeyWord kw_94[2] [static]

Initial value:

```
{
                {"compute",8,3,2,0,723,kw_93,0.,0.,0.,0,"{Target statistics for response levels} http://www.c
                {"num_response_levels",13,0,1,0,721,0,0.,0.,0.,0,"{Number of response levels} http://www.cs.s
                }
```

7.1.3.99 static KeyWord kw_95 [static]

Initial value:

```
{
                {"expansion_order",13,0,3,1,623,0,0.,0.,0.,0,"{Expansion order} http://www.cs.sandia.gov/dako
                {"expansion_terms",9,0,3,1,625,0,0.,0.,0.,0,"{Expansion terms} http://www.cs.sandia.gov/dakot
                {"reuse_points",8,0,1,0,613,0,0.,0.,0.,0,"{Reuse points flag for PCE coefficient estimation b
                {"reuse_samples",0,0,1,0,612},
                {"use_derivatives",8,0,2,0,615,0,0.,0.,0.,0,"{Derivative usage flag for PCE coefficient estim
                }
```

7.1.3.100 static KeyWord kw_96 [static]

Initial value:

```
{
                {"expansion_order",13,0,3,1,623,0,0.,0.,0.,0,"{Expansion order} http://www.cs.sandia.gov/dako
                {"expansion_terms",9,0,3,1,625,0,0.,0.,0.,0,"{Expansion terms} http://www.cs.sandia.gov/dakot
                }
```

7.1.3.101 static KeyWord kw_97 [static]

Initial value:

```
{
                {"expansion_order",13,0,2,1,623,0,0.,0.,0.,0,"{Expansion order} http://www.cs.sandia.gov/dako
                {"expansion_terms",9,0,2,1,625,0,0.,0.,0.,0,"{Expansion terms} http://www.cs.sandia.gov/dakot
                {"incremental_lhs",8,0,1,0,619,0,0.,0.,0.,0,"{Incremental LHS flag for PCE coefficient estima
                }
```

7.1.3.102 static KeyWord kw_98 [static]

Initial value:

```
{
                {"decay",8,0,1,0,589},
                {"generalized",8,0,1,0,591},
                {"sobol",8,0,1,0,587}
                }
```

7.1.3.103 static KeyWord kw_99 [static]

Initial value:

```
{
                {"adaptive",8,3,1,1,585,kw_98},
                {"uniform",8,0,1,1,583}
                }
```

7.1.3.104 static KeyWord kw_100 [static]

Initial value:

```
{
                {"nested",8,0,1,0,603},
                {"non_nested",8,0,1,0,605}
                }
```

7.1.3.105 GuiKeyWord kw_101[3] [static]

Initial value:

```
{
                {"adapt_import",8,0,1,1,637},
                {"import",8,0,1,1,635},
                {"mm_adapt_import",8,0,1,1,639}
                }
```

7.1.3.106 GuiKeyWord kw_102[2] [static]

Initial value:

```
{
                {"lhs",8,0,1,1,643},
                {"random",8,0,1,1,645}
                }
```

7.1.3.107 static KeyWord kw_103 [static]

Initial value:

```
{
                {"dimension_preference",14,0,1,0,601,0,0.,0.,0.,0,"{Sparse grid dimension preference} http://
                {"nested",8,0,2,0,603},
                {"non_nested",8,0,2,0,605}
                }
```

7.1.3.108 GuiKeyWord kw_104[2] [static]

Initial value:

```
{
                {"drop_tolerance",10,0,2,0,631,0,0.,0.,0.,0,"{VBD tolerance for omitting small indices} http:
                {"univariate_effects",8,0,1,0,629,0,0.,0.,0.,0,"{Restriction of VBD indices to main/total} ht
                }
```

7.1.3.109 static KeyWord kw_105 [static]

Initial value:

```
{
                {"all_variables",8,0,15,0,711,0,0.,0.,0.,0,"{All variables flag} http://www.cs.sandia.gov/dak
                {"askey",8,0,2,0,593},
                {"collocation_points",9,5,3,1,609,kw_95,0.,0.,0.,0,"{Number of collocation points for PCE coe
                {"collocation_ratio",10,5,3,1,611,kw_95,0.,0.,0.,0,"{Collocation point oversampling ratio for
                {"cubature_integrand",9,0,3,1,607,0,0.,0.,0.,0,"{Cubature integrand order for PCE coefficient
                {"distribution",8,2,9,0,759,kw_43,0.,0.,0.,0,"{Distribution type} http://www.cs.sandia.gov/da
                {"expansion_import_file",11,2,3,1,621,kw_96,0.,0.,0.,0,"{File name for import of PCE coeffici
                {"expansion_samples",9,3,3,1,617,kw_97,0.,0.,0.,0,"{Number of simulation samples for PCE coef
                {"fixed_seed",8,0,16,0,713,0,0.,0.,0.,0,"{Fixed seed flag} http://www.cs.sandia.gov/dakota/li
                {"gen_reliability_levels",14,1,11,0,769,kw_44,0.,0.,0.,0,"{Generalized reliability levels} ht
                {"p_refinement",8,2,1,0,581,kw_99,0.,0.,0.,0,"{Automated polynomial order refinement} http://
                {"probability_levels",14,1,10,0,765,kw_45,0.,0.,0.,0,"{Probability levels} http://www.cs.sand
                {"quadrature_order",13,2,3,1,597,kw_100,0.,0.,0.,0,"{Quadrature order for PCE coefficient est
                {"reliability_levels",14,1,13,0,715,kw_92,0.,0.,0.,0,"{Reliability levels} http://www.cs.sand
                {"response_levels",14,2,14,0,719,kw_94,0.,0.,0.,0,"{Response levels} http://www.cs.sandia.gov
                {"rng",8,2,12,0,773,kw_46,0.,0.,0.,0,"{Random number generator} http://www.cs.sandia.gov/dako
                {"sample_refinement",8,3,5,0,633,kw_101,0.,0.,0.,0,"{Importance sampling refinement} http://w
                {"sample_type",8,2,6,0,641,kw_102,0.,0.,0.,0,"{Sampling type} http://www.cs.sandia.gov/dakota
                {"samples",9,0,8,0,863,0,0.,0.,0.,0,"{Number of samples} http://www.cs.sandia.gov/dakota/lice
                {"seed",9,0,7,0,865,0,0.,0.,0.,0,"{Random seed} http://www.cs.sandia.gov/dakota/licensing/vot
                {"sparse_grid_level",9,3,3,1,599,kw_103,0.,0.,0.,0,"{Sparse grid level for PCE coefficient es
                {"variance_based_decomp",8,2,4,0,627,kw_104,0.,0.,0.,0,"{Variance based decomposition (VBD)} h
                {"wiener",8,0,2,0,595}
                }
```

7.1.3.110 static KeyWord kw_106 [static]

Initial value:

```
{
                {"previous_samples",9,0,1,1,705,0,0.,0.,0.,0,"{Previous samples for incremental approaches} http:
                }
```

7.1.3.111 static KeyWord kw_107 [static]

Initial value:

```
{
                {"incremental_lhs",8,1,1,1,701,kw_106},
                {"incremental_random",8,1,1,1,703,kw_106},
                {"lhs",8,0,1,1,699},
                {"random",8,0,1,1,697}
                }
```

7.1.3.112 static KeyWord kw_108 [static]

Initial value:

```
{
                {"drop_tolerance",10,0,1,0,709}
                }
```

7.1.3.113 static KeyWord kw_109 [static]

Initial value:

```
{
                {"all_variables",8,0,11,0,711,0,0.,0.,0.,0,"{All variables flag} http://www.cs.sandia.gov/dakota/
                {"distribution",8,2,5,0,759,kw_43,0.,0.,0.,0,"{Distribution type} http://www.cs.sandia.gov/dakota
                {"fixed_seed",8,0,12,0,713,0,0.,0.,0.,0,"{Fixed seed flag} http://www.cs.sandia.gov/dakota/licens
                {"gen_reliability_levels",14,1,7,0,769,kw_44,0.,0.,0.,0,"{Generalized reliability levels} http://
                {"probability_levels",14,1,6,0,765,kw_45,0.,0.,0.,0,"{Probability levels} http://www.cs.sandia.go
                {"reliability_levels",14,1,9,0,715,kw_92,0.,0.,0.,0,"{Reliability levels} http://www.cs.sandia.go
                {"response_levels",14,2,10,0,719,kw_94,0.,0.,0.,0,"{Response levels} http://www.cs.sandia.gov/dak
                {"rng",8,2,8,0,773,kw_46,0.,0.,0.,0,"{Random number generator} http://www.cs.sandia.gov/dakota/li
                {"sample_type",8,4,1,0,695,kw_107},
                {"samples",9,0,4,0,863,0,0.,0.,0.,0,"{Number of samples} http://www.cs.sandia.gov/dakota/licensin
                {"seed",9,0,3,0,865,0,0.,0.,0.,0,"{Random seed} http://www.cs.sandia.gov/dakota/licensing/votd/ht
                {"variance_based_decomp",8,1,2,0,707,kw_108}
                }
```

7.1.3.114 GuiKeyWord kw_110[2] [static]

Initial value:

```
{
                {"generalized",8,0,1,0,657},
                {"sobol",8,0,1,0,655}
                }
```

7.1.3.115 static KeyWord kw_111 [static]

Initial value:

```
{
                {"adaptive",8,2,1,1,653,kw_110},
                {"uniform",8,0,1,1,651}
                }
```

7.1.3.116 static KeyWord kw_112 [static]

Initial value:

```
{
                {"adapt_import",8,0,1,1,683},
                {"import",8,0,1,1,681},
                {"mm_adapt_import",8,0,1,1,685}
                }
```

7.1.3.117 GuiKeyWord kw_113[2] [static]

Initial value:

```
{
                {"lhs",8,0,1,1,689},
                {"random",8,0,1,1,691}
                }
```

7.1.3.118 static KeyWord kw_114 [static]

Initial value:

```
{
                {"dimension_preference",14,0,1,0,667,0,0.,0.,0.,0,"{Sparse grid dimension preference} http://
                }
```

7.1.3.119 static KeyWord kw_115 [static]

Initial value:

```
{
                {"drop_tolerance",10,0,2,0,677,0,0.,0.,0.,0,"{VBD tolerance for omitting small indices} http:
                {"univariate_effects",8,0,1,0,675,0,0.,0.,0.,0,"{Restriction of VBD indices to main/total} ht
                }
```

7.1.3.120 static KeyWord kw_116 [static]

Initial value:

```
{
                {"all_variables",8,0,16,0,711,0,0.,0.,0.,0,"{All variables flag} http://www.cs.sandia.gov/dakota/
                {"askey",8,0,2,0,659},
                {"distribution",8,2,10,0,759,kw_43,0.,0.,0.,0,"{Distribution type} http://www.cs.sandia.gov/dakot
                {"fixed_seed",8,0,17,0,713,0,0.,0.,0.,0,"{Fixed seed flag} http://www.cs.sandia.gov/dakota/licens
                {"gen_reliability_levels",14,1,12,0,769,kw_44,0.,0.,0.,0,"{Generalized reliability levels} http:/
                {"nested",8,0,4,0,669},
                {"non_nested",8,0,4,0,671},
                {"p_refinement",8,2,1,0,649,kw_111,0.,0.,0.,0,"{Automated polynomial order refinement} http://www
                {"probability_levels",14,1,11,0,765,kw_45,0.,0.,0.,0,"{Probability levels} http://www.cs.sandia.g
                {"quadrature_order",13,0,3,1,663,0,0.,0.,0.,0,"{Quadrature order for collocation points} http://w
                {"reliability_levels",14,1,14,0,715,kw_92,0.,0.,0.,0,"{Reliability levels} http://www.cs.sandia.g
                {"response_levels",14,2,15,0,719,kw_94,0.,0.,0.,0,"{Response levels} http://www.cs.sandia.gov/dak
                {"rng",8,2,13,0,773,kw_46,0.,0.,0.,0,"{Random number generator} http://www.cs.sandia.gov/dakota/l
                {"sample_refinement",8,3,6,0,679,kw_112,0.,0.,0.,0,"{Importance sampling refinement} http://www.c
                {"sample_type",8,2,7,0,687,kw_113,0.,0.,0.,0,"{Sampling type} http://www.cs.sandia.gov/dakota/lic
                {"samples",9,0,9,0,863,0,0.,0.,0.,0,"{Number of samples} http://www.cs.sandia.gov/dakota/licensin
                {"seed",9,0,8,0,865,0,0.,0.,0.,0,"{Random seed} http://www.cs.sandia.gov/dakota/licensing/votd/ht
                {"sparse_grid_level",9,1,3,1,665,kw_114,0.,0.,0.,0,"{Sparse grid level for collocation points} ht
                {"variance_based_decomp",8,2,5,0,673,kw_115,0.,0.,0.,0,"{Variance-based decomposition (VBD)} http
                {"wiener",8,0,2,0,661}
                }
```

7.1.3.121 static KeyWord kw_117 [static]

Initial value:

```
{
                {"misc_options",15,0,1,0,567}
                }
```

7.1.3.122 static KeyWord kw_118 [static]

Initial value:

```
{
                {"function_precision",10,0,11,0,195,0,0.,0.,0.,0,"{Function precision} http://www.cs.sandia.gov/d
                {"linear_equality_constraint_matrix",14,0,6,0,401,0,0.,0.,0.,0,"{Linear equality coefficient matr
                {"linear_equality_scale_types",15,0,8,0,405,0,0.,0.,0.,0,"{Linear equality scaling types} http://
                {"linear_equality_scales",14,0,9,0,407,0,0.,0.,0.,0,"{Linear equality scales} http://www.cs.sandi
                {"linear_equality_targets",14,0,7,0,403,0,0.,0.,0.,0,"{Linear equality targets} http://www.cs.san
                {"linear_inequality_constraint_matrix",14,0,1,0,391,0,0.,0.,0.,0,"{Linear inequality coefficient
                {"linear_inequality_lower_bounds",14,0,2,0,393,0,0.,0.,0.,0,"{Linear inequality lower bounds} htt
                {"linear_inequality_scale_types",15,0,4,0,397,0,0.,0.,0.,0,"{Linear inequality scaling types} htt
                {"linear_inequality_scales",14,0,5,0,399,0,0.,0.,0.,0,"{Linear inequality scales} http://www.cs.s
                {"linear_inequality_upper_bounds",14,0,3,0,395,0,0.,0.,0.,0,"{Linear inequality upper bounds} htt
                {"linesearch_tolerance",10,0,12,0,197,0,0.,0.,0.,0,"{Line search tolerance} http://www.cs.sandia.
                {"verify_level",9,0,10,0,193,0,0.,0.,0.,0,"{Gradient verification level} http://www.cs.sandia.gov
                }
```

7.1.3.123 static KeyWord kw_119 [static]

Initial value:

```
{
                {"gradient_tolerance",10,0,11,0,231},
                {"linear_equality_constraint_matrix",14,0,6,0,401,0,0.,0.,0.,0,"{Linear equality coefficient
                {"linear_equality_scale_types",15,0,8,0,405,0,0.,0.,0.,0,"{Linear equality scaling types} htt
                {"linear_equality_scales",14,0,9,0,407,0,0.,0.,0.,0,"{Linear equality scales} http://www.cs.s
                {"linear_equality_targets",14,0,7,0,403,0,0.,0.,0.,0,"{Linear equality targets} http://www.cs
                {"linear_inequality_constraint_matrix",14,0,1,0,391,0,0.,0.,0.,0,"{Linear inequality coeffici
                {"linear_inequality_lower_bounds",14,0,2,0,393,0,0.,0.,0.,0,"{Linear inequality lower bounds}
                {"linear_inequality_scale_types",15,0,4,0,397,0,0.,0.,0.,0,"{Linear inequality scaling types}
                {"linear_inequality_scales",14,0,5,0,399,0,0.,0.,0.,0,"{Linear inequality scales} http://www.
                {"linear_inequality_upper_bounds",14,0,3,0,395,0,0.,0.,0.,0,"{Linear inequality upper bounds}
                {"max_step",10,0,10,0,229}
                }
```

7.1.3.124 static KeyWord kw_120 [static]

Initial value:

```
{
                {"linear_equality_constraint_matrix",14,0,7,0,401,0,0.,0.,0.,0,"{Linear equality coefficient
                {"linear_equality_scale_types",15,0,9,0,405,0,0.,0.,0.,0,"{Linear equality scaling types} htt
                {"linear_equality_scales",14,0,10,0,407,0,0.,0.,0.,0,"{Linear equality scales} http://www.cs.
                {"linear_equality_targets",14,0,8,0,403,0,0.,0.,0.,0,"{Linear equality targets} http://www.cs
                {"linear_inequality_constraint_matrix",14,0,2,0,391,0,0.,0.,0.,0,"{Linear inequality coeffici
                {"linear_inequality_lower_bounds",14,0,3,0,393,0,0.,0.,0.,0,"{Linear inequality lower bounds}
                {"linear_inequality_scale_types",15,0,5,0,397,0,0.,0.,0.,0,"{Linear inequality scaling types}
                {"linear_inequality_scales",14,0,6,0,399,0,0.,0.,0.,0,"{Linear inequality scales} http://www.
                {"linear_inequality_upper_bounds",14,0,4,0,395,0,0.,0.,0.,0,"{Linear inequality upper bounds}
                {"search_scheme_size",9,0,1,0,235}
                }
```

7.1.3.125 static KeyWord kw_121 [static]

Initial value:

```
{
                {"gradient_based_line_search",8,0,1,1,215,0,0.,0.,0.,0,"[CHOOSE line search type]"},
                {"tr_pds",8,0,1,1,219},
                {"trust_region",8,0,1,1,217},
                {"value_based_line_search",8,0,1,1,213}
                }
```

7.1.3.126 static KeyWord kw_122 [static]

Initial value:

```
{
                {"centering_parameter",10,0,5,0,227},
                {"central_path",11,0,3,0,223},
                {"gradient_tolerance",10,0,16,0,231},
                {"linear_equality_constraint_matrix",14,0,11,0,401,0,0.,0.,0.,0,"{Linear equality coefficient mat
                {"linear_equality_scale_types",15,0,13,0,405,0,0.,0.,0.,0,"{Linear equality scaling types} http:/
                {"linear_equality_scales",14,0,14,0,407,0,0.,0.,0.,0,"{Linear equality scales} http://www.cs.sand
                {"linear_equality_targets",14,0,12,0,403,0,0.,0.,0.,0,"{Linear equality targets} http://www.cs.sa
                {"linear_inequality_constraint_matrix",14,0,6,0,391,0,0.,0.,0.,0,"{Linear inequality coefficient
                {"linear_inequality_lower_bounds",14,0,7,0,393,0,0.,0.,0.,0,"{Linear inequality lower bounds} htt
                {"linear_inequality_scale_types",15,0,9,0,397,0,0.,0.,0.,0,"{Linear inequality scaling types} htt
                {"linear_inequality_scales",14,0,10,0,399,0,0.,0.,0.,0,"{Linear inequality scales} http://www.cs.
                {"linear_inequality_upper_bounds",14,0,8,0,395,0,0.,0.,0.,0,"{Linear inequality upper bounds} htt
                {"max_step",10,0,15,0,229},
                {"merit_function",11,0,2,0,221},
                {"search_method",8,4,1,0,211,kw_121},
                {"steplength_to_boundary",10,0,4,0,225}
                }
```

7.1.3.127 static KeyWord kw_123 [static]

Initial value:

```
{
                {"debug",8,0,1,1,67,0,0.,0.,0.,0,"[CHOOSE output level]"},
                {"quiet",8,0,1,1,71},
                {"silent",8,0,1,1,73},
                {"verbose",8,0,1,1,69}
                }
```

7.1.3.128 static KeyWord kw_124 [static]

Initial value:

```
{
                {"partitions",13,0,1,0,861,0,0.,0.,0.,0,"{Number of partitions} http://www.cs.sandia.gov/dakota/l
                {"samples",9,0,3,0,863,0,0.,0.,0.,0,"{Number of samples} http://www.cs.sandia.gov/dakota/licensin
                {"seed",9,0,2,0,865,0,0.,0.,0.,0,"{Random seed} http://www.cs.sandia.gov/dakota/licensing/votd/ht
                }
```

7.1.3.129 static KeyWord kw_125 [static]

Initial value:

```
{
                {"converge_order",8,0,1,1,1057},
                {"converge_qoi",8,0,1,1,1059},
                {"estimate_order",8,0,1,1,1055},
                {"refinement_rate",10,0,2,0,1061,0,0.,0.,0.,0,"{Refinement rate} http://www.cs.sandia.gov/dakota/
                }
```

7.1.3.130 static KeyWord kw_126 [static]

Initial value:

```
{
                {"num_generations",0x29,0,2,0,341},
                {"percent_change",10,0,1,0,339}
                }
```

7.1.3.131 static KeyWord kw_127 [static]

Initial value:

```
{
                {"num_generations",0x29,0,2,0,335,0,0.,0.,0.,0,"{Number of generations (for convergence test)
                {"percent_change",10,0,1,0,333,0,0.,0.,0.,0,"{Percent change in fitness} http://www.cs.sandia
                }
```

7.1.3.132 static KeyWord kw_128 [static]

Initial value:

```
{
                {"average_fitness_tracker",8,2,1,1,337,kw_126},
                {"best_fitness_tracker",8,2,1,1,331,kw_127}
                }
```

7.1.3.133 static KeyWord kw_129 [static]

Initial value:

```
{
                {"constraint_penalty",10,0,2,0,317,0,0.,0.,0.,0,"{Constraint penalty in merit function} http:
                {"merit_function",8,0,1,1,315}
                }
```

7.1.3.134 static KeyWord kw_130 [static]

Initial value:

```
{
                {"elitist",8,0,1,1,321},
                {"favor_feasible",8,0,1,1,323},
                {"roulette_wheel",8,0,1,1,325},
                {"unique_roulette_wheel",8,0,1,1,327}
                }
```

7.1.3.135 static KeyWord kw_131 [static]

Initial value:

```
{
                {"convergence_type",8,2,3,0,329,kw_128,0.,0.,0.,0,"{Convergence type} http://www.cs.sandia.gov/da
                {"crossover_type",8,5,17,0,357,kw_78,0.,0.,0.,0,"{Crossover type} http://www.cs.sandia.gov/dakota
                {"fitness_type",8,2,1,0,313,kw_129,0.,0.,0.,0,"{Fitness type} http://www.cs.sandia.gov/dakota/lic
                {"initialization_type",8,3,16,0,349,kw_79,0.,0.,0.,0,"{Initialization type} http://www.cs.sandia.
                {"linear_equality_constraint_matrix",14,0,9,0,401,0,0.,0.,0.,0,"{Linear equality coefficient matr
                {"linear_equality_scale_types",15,0,11,0,405,0,0.,0.,0.,0,"{Linear equality scaling types} http:/
                {"linear_equality_scales",14,0,12,0,407,0,0.,0.,0.,0,"{Linear equality scales} http://www.cs.sand
                {"linear_equality_targets",14,0,10,0,403,0,0.,0.,0.,0,"{Linear equality targets} http://www.cs.sa
                {"linear_inequality_constraint_matrix",14,0,4,0,391,0,0.,0.,0.,0,"{Linear inequality coefficient
                {"linear_inequality_lower_bounds",14,0,5,0,393,0,0.,0.,0.,0,"{Linear inequality lower bounds} htt
                {"linear_inequality_scale_types",15,0,7,0,397,0,0.,0.,0.,0,"{Linear inequality scaling types} htt
                {"linear_inequality_scales",14,0,8,0,399,0,0.,0.,0.,0,"{Linear inequality scales} http://www.cs.s
                {"linear_inequality_upper_bounds",14,0,6,0,395,0,0.,0.,0.,0,"{Linear inequality upper bounds} htt
                {"log_file",11,0,14,0,345,0,0.,0.,0.,0,"{Log file} http://www.cs.sandia.gov/dakota/licensing/votd
                {"mutation_type",8,6,18,0,373,kw_81,0.,0.,0.,0,"{Mutation type} http://www.cs.sandia.gov/dakota/l
                {"population_size",9,0,13,0,343,0,0.,0.,0.,0,"{Number of population members} http://www.cs.sandia
                {"print_each_pop",8,0,15,0,347,0,0.,0.,0.,0,"{Population output} http://www.cs.sandia.gov/dakota/
                {"replacement_type",8,4,2,0,319,kw_130,0.,0.,0.,0,"{Replacement type} http://www.cs.sandia.gov/da
                {"seed",9,0,19,0,389,0,0.,0.,0.,0,"{Random seed} http://www.cs.sandia.gov/dakota/licensing/votd/h
                }
```

7.1.3.136 static KeyWord kw_132 [static]

Initial value:

```
{
                {"function_precision",10,0,12,0,195,0,0.,0.,0.,0,"{Function precision} http://www.cs.sandia.gov/d
                {"linear_equality_constraint_matrix",14,0,7,0,401,0,0.,0.,0.,0,"{Linear equality coefficient matr
                {"linear_equality_scale_types",15,0,9,0,405,0,0.,0.,0.,0,"{Linear equality scaling types} http://
                {"linear_equality_scales",14,0,10,0,407,0,0.,0.,0.,0,"{Linear equality scales} http://www.cs.sand
                {"linear_equality_targets",14,0,8,0,403,0,0.,0.,0.,0,"{Linear equality targets} http://www.cs.san
                {"linear_inequality_constraint_matrix",14,0,2,0,391,0,0.,0.,0.,0,"{Linear inequality coefficient
                {"linear_inequality_lower_bounds",14,0,3,0,393,0,0.,0.,0.,0,"{Linear inequality lower bounds} htt
                {"linear_inequality_scale_types",15,0,5,0,397,0,0.,0.,0.,0,"{Linear inequality scaling types} htt
                {"linear_inequality_scales",14,0,6,0,399,0,0.,0.,0.,0,"{Linear inequality scales} http://www.cs.s
                {"linear_inequality_upper_bounds",14,0,4,0,395,0,0.,0.,0.,0,"{Linear inequality upper bounds} htt
                {"linesearch_tolerance",10,0,13,0,197,0,0.,0.,0.,0,"{Line search tolerance} http://www.cs.sandia.
                {"nlssol",8,0,1,1,191},
                {"npsol",8,0,1,1,189},
                {"verify_level",9,0,11,0,193,0,0.,0.,0.,0,"{Gradient verification level} http://www.cs.sandia.gov
                }
```

7.1.3.137 static KeyWord kw_133 [static]

Initial value:

```
{
                {"approx_method_name",11,0,1,1,571,0,0.,0.,0.,0,"[CHOOSE sub-method ref.]{Approximate sub-problem
                {"approx_method_pointer",11,0,1,1,573,0,0.,0.,0.,0,"{Approximate sub-problem minimization method
                {"replace_points",8,0,2,0,575,0,0.,0.,0.,0,"{Replace points used in surrogate construction with b
                }
```

7.1.3.138 static KeyWord kw_134 [static]

Initial value:

```
{
                {"filter",8,0,1,1,143,0,0.,0.,0.,0,"@[CHOOSE acceptance logic]"},
                {"tr_ratio",8,0,1,1,141}
                }
```

7.1.3.139 static KeyWord kw_135 [static]

Initial value:

```
{
                {"augmented_lagrangian_objective",8,0,1,1,119,0,0.,0.,0.,0,"[CHOOSE objective formulation]"},
                {"lagrangian_objective",8,0,1,1,121},
                {"linearized_constraints",8,0,2,2,125,0,0.,0.,0.,0,"[CHOOSE constraint formulation]"},
                {"no_constraints",8,0,2,2,127},
                {"original_constraints",8,0,2,2,123,0,0.,0.,0.,0,"@"},
                {"original_primary",8,0,1,1,115,0,0.,0.,0.,0,"@"},
                {"single_objective",8,0,1,1,117}
                }
```

7.1.3.140 static KeyWord kw_136 [static]

Initial value:

```
{
                {"homotopy",8,0,1,1,147}
                }
```

7.1.3.141 GuiKeyWord kw_137[4] [static]

Initial value:

```
{
                {"adaptive_penalty_merit",8,0,1,1,133,0,0.,0.,0.,0,"[CHOOSE merit function]"},
                {"augmented_lagrangian_merit",8,0,1,1,137,0,0.,0.,0.,0,"@"},
                {"lagrangian_merit",8,0,1,1,135},
                {"penalty_merit",8,0,1,1,131}
                }
```

7.1.3.142 static KeyWord kw_138 [static]

Initial value:

```
{
                {"contract_threshold",10,0,3,0,105,0,0.,0.,0.,0,"{Shrink trust region if trust region ratio is be
                {"contraction_factor",10,0,5,0,109,0,0.,0.,0.,0,"{Trust region contraction factor} http://www.cs.
                {"expand_threshold",10,0,4,0,107,0,0.,0.,0.,0,"{Expand trust region if trust region ratio is abov
                {"expansion_factor",10,0,6,0,111,0,0.,0.,0.,0,"{Trust region expansion factor} http://www.cs.sand
                {"initial_size",10,0,1,0,101,0,0.,0.,0.,0,"{Trust region initial size (relative to bounds)} http:
                {"minimum_size",10,0,2,0,103,0,0.,0.,0.,0,"{Trust region minimum size} http://www.cs.sandia.gov/d
                }
```

7.1.3.143 static KeyWord kw_139 [static]

Initial value:

```
{
                {"acceptance_logic",8,2,7,0,139,kw_134,0.,0.,0.,0,"{SBL iterate acceptance logic} http://www.cs.s
                {"approx_method_name",11,0,1,1,91,0,0.,0.,0.,0,"[CHOOSE sub-method ref.]{Approximate sub-problem
                {"approx_method_pointer",11,0,1,1,93,0,0.,0.,0.,0,"{Approximate sub-problem minimization method p
                {"approx_subproblem",8,7,5,0,113,kw_135,0.,0.,0.,0,"{Approximate subproblem formulation} http://w
                {"constraint_relax",8,1,8,0,145,kw_136,0.,0.,0.,0,"{SBL constraint relaxation method for infeasib
                {"linear_equality_constraint_matrix",14,0,14,0,401,0,0.,0.,0.,0,"{Linear equality coefficient mat
                {"linear_equality_scale_types",15,0,16,0,405,0,0.,0.,0.,0,"{Linear equality scaling types} http:/
                {"linear_equality_scales",14,0,17,0,407,0,0.,0.,0.,0,"{Linear equality scales} http://www.cs.sand
                {"linear_equality_targets",14,0,15,0,403,0,0.,0.,0.,0,"{Linear equality targets} http://www.cs.sa
                {"linear_inequality_constraint_matrix",14,0,9,0,391,0,0.,0.,0.,0,"{Linear inequality coefficient
                {"linear_inequality_lower_bounds",14,0,10,0,393,0,0.,0.,0.,0,"{Linear inequality lower bounds} ht
                {"linear_inequality_scale_types",15,0,12,0,397,0,0.,0.,0.,0,"{Linear inequality scaling types} ht
                {"linear_inequality_scales",14,0,13,0,399,0,0.,0.,0.,0,"{Linear inequality scales} http://www.cs.
                {"linear_inequality_upper_bounds",14,0,11,0,395,0,0.,0.,0.,0,"{Linear inequality upper bounds} ht
                {"merit_function",8,4,6,0,129,kw_137,0.,0.,0.,0,"{SBL merit function} http://www.cs.sandia.gov/da
                {"soft_convergence_limit",9,0,2,0,95,0,0.,0.,0.,0,"{Soft convergence limit for SBL iterations} ht
                {"trust_region",8,6,4,0,99,kw_138,0.,0.,0.,0,"{Trust region group specification} http://www.cs.sa
                {"truth_surrogate_bypass",8,0,3,0,97,0,0.,0.,0.,0,"{Flag for bypassing lower level surrogates in
                }
```

7.1.3.144 static KeyWord kw_140 [static]

Initial value:

```
{
                {"final_point",14,0,1,1,1033,0,0.,0.,0.,0,"[CHOOSE final pt or increment]{Termination point of ve
                {"num_steps",9,0,2,2,1037,0,0.,0.,0.,0,"{Number of steps along vector} http://www.cs.sandia.gov/d
                {"step_vector",14,0,1,1,1035,0,0.,0.,0.,0,"{Step vector} http://www.cs.sandia.gov/dakota/licensin
                }
```

7.1.3.145 static KeyWord kw_142 [static]

Initial value:

```
{
                {"optional_interface_responses_pointer",11,0,1,0,1223,0,0.,0.,0.,0,"{Responses pointer for nested
                }
```

7.1.3.146 static KeyWord kw_143 [static]

Initial value:

```
{
                {"primary_response_mapping",14,0,3,0,1231,0,0.,0.,0.,0,"{Primary response mappings for nested
                {"primary_variable_mapping",15,0,1,0,1227,0,0.,0.,0.,0,"{Primary variable mappings for nested
                {"secondary_response_mapping",14,0,4,0,1233,0,0.,0.,0.,0,"{Secondary response mappings for ne
                {"secondary_variable_mapping",15,0,2,0,1229,0,0.,0.,0.,0,"{Secondary variable mappings for ne
                }
```

7.1.3.147 static KeyWord kw_144 [static]

Initial value:

```
{
                {"optional_interface_pointer",11,1,1,0,1221,kw_142,0.,0.,0.,0,"{Optional interface set pointe
                {"sub_method_pointer",11,4,2,1,1225,kw_143,0.,0.,0.,0,"{Sub-method pointer for nested models}
                }
```

7.1.3.148 static KeyWord kw_145 [static]

Initial value:

```
{
                {"interface_pointer",11,0,1,0,1073,0,0.,0.,0.,0,"{Interface set pointer} http://www.cs.sandia
                }
```

7.1.3.149 static KeyWord kw_146 [static]

Initial value:

```
{
                {"additive",8,0,2,2,1181,0,0.,0.,0.,0,"[CHOOSE correction type]"},
                {"combined",8,0,2,2,1185},
                {"first_order",8,0,1,1,1177,0,0.,0.,0.,0,"[CHOOSE correction order]"},
                {"multiplicative",8,0,2,2,1183},
                {"second_order",8,0,1,1,1179},
                {"zeroth_order",8,0,1,1,1175}
                }
```

7.1.3.150 static KeyWord kw_147 [static]

Initial value:

```
{
                {"constant",8,0,1,1,1087,0,0.,0.,0.,0,"[CHOOSE trend type]"},
                {"linear",8,0,1,1,1089},
                {"reduced_quadratic",8,0,1,1,1091}
                }
```

7.1.3.151 static KeyWord kw_148 [static]

Initial value:

```
{
                {"point_selection",8,0,1,0,1083,0,0.,0.,0.,0,"{GP point selection} http://www.cs.sandia.gov/dakot
                {"trend",8,3,2,0,1085,kw_147,0.,0.,0.,0,"{GP trend function} http://www.cs.sandia.gov/dakota/lice
                }
```

7.1.3.152 GuiKeyWord kw_149[4] [static]

Initial value:

```
{
                {"constant",8,0,1,1,1139},
                {"linear",8,0,1,1,1141},
                {"quadratic",8,0,1,1,1145},
                {"reduced_quadratic",8,0,1,1,1143}
                }
```

7.1.3.153 static KeyWord kw_150 [static]

Initial value:

```
{
                {"correlation_lengths",14,0,4,0,1151,0,0.,0.,0.,0,"{Kriging correlation lengths} http://www.cs.sa
                {"max_trials",0x19,0,3,0,1149,0,0.,0.,0.,0,"{Kriging maximum trials} http://www.cs.sandia.gov/dak
                {"optimization_method",11,0,2,0,1147,0,0.,0.,0.,0,"{Kriging optimization method} http://www.cs.sa
                {"trend",8,4,1,0,1137,kw_149,0.,0.,0.,0,"{Kriging trend function} http://www.cs.sandia.gov/dakota
                }
```

7.1.3.154 static KeyWord kw_151 [static]

Initial value:

```
{
                {"cubic",8,0,1,1,1101},
                {"linear",8,0,1,1,1099}
                }
```

7.1.3.155 static KeyWord kw_152 [static]

Initial value:

```
{
                {"interpolation",8,2,2,0,1097,kw_151,0.,0.,0.,0,"{MARS interpolation} http://www.cs.sandia.gov/da
                {"max_bases",9,0,1,0,1095,0,0.,0.,0.,0,"{MARS maximum bases} http://www.cs.sandia.gov/dakota/lice
                }
```

7.1.3.156 static KeyWord kw_153 [static]

Initial value:

```
{
                {"poly_order",9,0,1,0,1105,0,0.,0.,0.,0,"{MLS polynomial order} http://www.cs.sandia.gov/dako
                {"weight_function",9,0,2,0,1107,0,0.,0.,0.,0,"{MLS weight function} http://www.cs.sandia.gov/
                }
```

7.1.3.157 static KeyWord kw_154 [static]

Initial value:

```
{
                {"nodes",9,0,1,0,1111,0,0.,0.,0.,0,"{ANN number nodes} http://www.cs.sandia.gov/dakota/licens
                {"random_weight",9,0,3,0,1115,0,0.,0.,0.,0,"{ANN random weight} http://www.cs.sandia.gov/dako
                {"range",10,0,2,0,1113,0,0.,0.,0.,0,"{ANN range} http://www.cs.sandia.gov/dakota/licensing/vo
                }
```

7.1.3.158 static KeyWord kw_155 [static]

Initial value:

```
{
                {"cubic",8,0,1,1,1133,0,0.,0.,0.,0,"[CHOOSE polynomial order]"},
                {"linear",8,0,1,1,1129},
                {"quadratic",8,0,1,1,1131}
                }
```

7.1.3.159 static KeyWord kw_156 [static]

Initial value:

```
{
                {"bases",9,0,1,0,1119,0,0.,0.,0.,0,"{RBF number of bases} http://www.cs.sandia.gov/dakota/lic
                {"max_pts",9,0,2,0,1121,0,0.,0.,0.,0,"{RBF maximum points} http://www.cs.sandia.gov/dakota/li
                {"max_subsets",9,0,4,0,1125},
                {"min_partition",9,0,3,0,1123,0,0.,0.,0.,0,"{RBF minimum partitions} http://www.cs.sandia.gov
                }
```

7.1.3.160 static KeyWord kw_157 [static]

Initial value:

```
{
                {"all",8,0,1,1,1163},
                {"none",8,0,1,1,1167},
                {"region",8,0,1,1,1165}
                }
```

7.1.3.161 static KeyWord kw_158 [static]

Initial value:

```
{
                {"correction",8,6,7,0,1173,kw_146,0.,0.,0.,0,"{Surrogate correction approach} http://www.cs.sandi
                {"dace_method_pointer",11,0,3,0,1159,0,0.,0.,0.,0,"{Design of experiments method pointer} http://
                {"diagnostics",15,0,8,0,1187,0,0.,0.,0.,0,"{Print diagnostic metrics about the surrogate goodness
                {"gaussian_process",8,2,1,1,1081,kw_148,0.,0.,0.,0,"[CHOOSE surrogate type]{Gaussian process} htt
                {"kriging",8,4,1,1,1135,kw_150,0.,0.,0.,0,"{Kriging interpolation} http://www.cs.sandia.gov/dakot
                {"mars",8,2,1,1,1093,kw_152,0.,0.,0.,0,"{Multivariate adaptive regression splines} http://www.cs.
                {"minimum_points",8,0,2,0,1155},
                {"moving_least_squares",8,2,1,1,1103,kw_153,0.,0.,0.,0,"{Moving least squares} http://www.cs.sand
                {"neural_network",8,3,1,1,1109,kw_154,0.,0.,0.,0,"{Artificial neural network} http://www.cs.sandi
                {"points_file",11,0,5,0,1169},
                {"polynomial",8,3,1,1,1127,kw_155,0.,0.,0.,0,"{Polynomial} http://www.cs.sandia.gov/dakota/licens
                {"radial_basis",8,4,1,1,1117,kw_156},
                {"recommended_points",8,0,2,0,1157},
                {"reuse_points",8,3,4,0,1161,kw_157},
                {"reuse_samples",0,3,4,0,1160,kw_157},
                {"samples_file",3,0,5,0,1168},
                {"total_points",9,0,2,0,1153},
                {"use_derivatives",8,0,6,0,1171}
                }
```

7.1.3.162 static KeyWord kw_159 [static]

Initial value:

```
{
                {"additive",8,0,2,2,1213,0,0.,0.,0.,0,"[CHOOSE correction type]"},
                {"combined",8,0,2,2,1217},
                {"first_order",8,0,1,1,1209,0,0.,0.,0.,0,"[CHOOSE correction order]"},
                {"multiplicative",8,0,2,2,1215},
                {"second_order",8,0,1,1,1211},
                {"zeroth_order",8,0,1,1,1207}
                }
```

7.1.3.163 static KeyWord kw_160 [static]

Initial value:

```
{
                {"correction",8,6,3,3,1205,kw_159,0.,0.,0.,0,"{Surrogate correction approach} http://www.cs.sandi
                {"high_fidelity_model_pointer",11,0,2,2,1203,0,0.,0.,0.,0,"{Pointer to the high fidelity model sp
                {"low_fidelity_model_pointer",11,0,1,1,1201,0,0.,0.,0.,0,"{Pointer to the low fidelity model spec
                }
```

7.1.3.164 static KeyWord kw_161 [static]

Initial value:

```
{
                {"actual_model_pointer",11,0,2,2,1197,0,0.,0.,0.,0,"{Pointer to the truth model specification
                {"taylor_series",8,0,1,1,1195,0,0.,0.,0.,0,"{Taylor series local approximation } http://www.c
                }
```

7.1.3.165 static KeyWord kw_162 [static]

Initial value:

```
{
                {"actual_model_pointer",11,0,2,2,1197,0,0.,0.,0.,0,"{Pointer to the truth model specification
                {"tana",8,0,1,1,1191,0,0.,0.,0.,0,"{Two-point adaptive nonlinear approximation } http://www.c
                }
```

7.1.3.166 static KeyWord kw_163 [static]

Initial value:

```
{
                {"global",8,18,2,1,1079,kw_158,0.,0.,0.,0,"[CHOOSE surrogate category]{Global approximations
                {"hierarchical",8,3,2,1,1199,kw_160,0.,0.,0.,0,"{Hierarchical approximation } http://www.cs.s
                {"id_surrogates",13,0,1,0,1077,0,0.,0.,0.,0,"{Surrogate response ids} http://www.cs.sandia.go
                {"local",8,2,2,1,1193,kw_161,0.,0.,0.,0,"{Local approximation} http://www.cs.sandia.gov/dakot
                {"multipoint",8,2,2,1,1189,kw_162,0.,0.,0.,0,"{Multipoint approximation} http://www.cs.sandia
                }
```

7.1.3.167 static KeyWord kw_164 [static]

Initial value:

```
{
                {"id_model",11,0,1,0,1065,0,0.,0.,0.,0,"{Model set identifier} http://www.cs.sandia.gov/dakot
                {"nested",8,2,4,1,1219,kw_144,0.,0.,0.,0,"[CHOOSE model type]"},
                {"responses_pointer",11,0,3,0,1069,0,0.,0.,0.,0,"{Responses set pointer} http://www.cs.sandia
                {"single",8,1,4,1,1071,kw_145,0.,0.,0.,0,"@"},
                {"surrogate",8,5,4,1,1075,kw_163},
                {"variables_pointer",11,0,2,0,1067,0,0.,0.,0.,0,"{Variables set pointer} http://www.cs.sandia
                }
```

7.1.3.168 static KeyWord kw_165 [static]

Initial value:

```
{
                {"ignore_bounds",8,0,1,0,1673,0,0.,0.,0.,0,"{Ignore variable bounds} http://www.cs.sandia.gov
                }
```

7.1.3.169 static KeyWord kw_166 [static]

Initial value:

```
{
                {"central",8,0,6,0,1681,0,0.,0.,0.,0,"[CHOOSE difference interval]"},
                {"dakota",8,1,4,0,1671,kw_165,0.,0.,0.,0,"@[CHOOSE gradient source]"},
                {"fd_gradient_step_size",0x406,0,7,0,1682,0,0.,0.,0.001},
                {"fd_step_size",0x40e,0,7,0,1683,0,0.,0.,0.001,0,"{Finite difference step size} http://www.cs.san
                {"forward",8,0,6,0,1679,0,0.,0.,0.,0,"@"},
                {"id_analytic_gradients",13,0,2,2,1665,0,0.,0.,0.,0,"{Analytic derivatives function list} http://
                {"id_numerical_gradients",13,0,1,1,1663,0,0.,0.,0.,0,"{Numerical derivatives function list} http:
                {"interval_type",8,0,5,0,1677,0,0.,0.,0.,0,"{Interval type} http://www.cs.sandia.gov/dakota/licen
                {"method_source",8,0,3,0,1669,0,0.,0.,0.,0,"{Method source} http://www.cs.sandia.gov/dakota/licen
                {"vendor",8,0,4,0,1675}
                }
```

7.1.3.170 static KeyWord kw_167 [static]

Initial value:

```
{
                {"fd_hessian_step_size",6,0,1,0,1708},
                {"fd_step_size",14,0,1,0,1709,0,0.,0.,0.,0,"{Finite difference step size} http://www.cs.sandia.go
                }
```

7.1.3.171 static KeyWord kw_168 [static]

Initial value:

```
{
                {"damped",8,0,1,0,1719,0,0.,0.,0.,0,"{Numerical safeguarding of BFGS update} http://www.cs.sandia
                }
```

7.1.3.172 static KeyWord kw_169 [static]

Initial value:

```
{
                {"bfgs",8,1,1,1,1717,kw_168,0.,0.,0.,0,"[CHOOSE Hessian approx.]"},
                {"sr1",8,0,1,1,1721}
                }
```

7.1.3.173 static KeyWord kw_170 [static]

Initial value:

```
{
                {"central",8,0,2,0,1713,0,0.,0.,0.,0,"[CHOOSE difference interval]"},
                {"forward",8,0,2,0,1711,0,0.,0.,0.,0,"@"},
                {"id_analytic_hessians",13,0,4,0,1723,0,0.,0.,0.,0,"{Analytic Hessians function list} http://
                {"id_numerical_hessians",13,2,1,0,1707,kw_167,0.,0.,0.,0,"{Numerical Hessians function list} h
                {"id_quasi_hessians",13,2,3,0,1715,kw_169,0.,0.,0.,0,"{Quasi Hessians function list} http://w
                }
```

7.1.3.174 static KeyWord kw_171 [static]

Initial value:

```
{
                {"nonlinear_equality_scale_types",0x80f,0,2,0,1651,0,0.,0.,0.,0,"{Nonlinear equality scaling t
                {"nonlinear_equality_scales",0x80e,0,3,0,1653,0,0.,0.,0.,0,"{Nonlinear equality constraint sca
                {"nonlinear_equality_targets",14,0,1,0,1649,0,0.,0.,0.,0,"{Nonlinear equality constraint targe
                }
```

7.1.3.175 static KeyWord kw_172 [static]

Initial value:

```
{
                {"nonlinear_inequality_lower_bounds",14,0,1,0,1639,0,0.,0.,0.,0,"{Nonlinear inequality constra
                {"nonlinear_inequality_scale_types",0x80f,0,3,0,1643,0,0.,0.,0.,0,"{Nonlinear inequality scal
                {"nonlinear_inequality_scales",0x80e,0,4,0,1645,0,0.,0.,0.,0,"{Nonlinear inequality constrain
                {"nonlinear_inequality_upper_bounds",14,0,2,0,1641,0,0.,0.,0.,0,"{Nonlinear inequality constra
                }
```

7.1.3.176 static KeyWord kw_173 [static]

Initial value:

```
{
                {"least_squares_data_file",11,0,1,0,1629,0,0.,0.,0.,0,"{Least squares data source file} http:
                {"least_squares_term_scale_types",0x80f,0,2,0,1631,0,0.,0.,0.,0,"{Least squares term scaling t
                {"least_squares_term_scales",0x80e,0,3,0,1633,0,0.,0.,0.,0,"{Least squares terms scales} http
                {"least_squares_weights",14,0,4,0,1635,0,0.,0.,0.,0,"{Least squares terms weightings} http://
                {"num_nonlinear_equality_constraints",0x29,3,6,0,1647,kw_171,0.,0.,0.,0,"{Number of nonlinear
                {"num_nonlinear_inequality_constraints",0x29,4,5,0,1637,kw_172,0.,0.,0.,0,"{Number of nonline
                }
```

7.1.3.177 static KeyWord kw_174 [static]

Initial value:

```
{
                {"nonlinear_equality_scale_types",0x80f,0,2,0,1623,0,0.,0.,0.,0,"{Nonlinear equality constrai
                {"nonlinear_equality_scales",0x80e,0,3,0,1625,0,0.,0.,0.,0,"{Nonlinear equality constraint sca
                {"nonlinear_equality_targets",14,0,1,0,1621,0,0.,0.,0.,0,"{Nonlinear equality constraint targe
                }
```

7.1.3.178 static KeyWord kw_175 [static]

Initial value:

```
{
                {"nonlinear_inequality_lower_bounds",14,0,1,0,1611,0,0.,0.,0,"{Nonlinear inequality constraint
                {"nonlinear_inequality_scale_types",0x80f,0,3,0,1615,0,0.,0.,0,"{Nonlinear inequality constrai
                {"nonlinear_inequality_scales",0x80e,0,4,0,1617,0,0.,0.,0,"{Nonlinear inequality constraint sc
                {"nonlinear_inequality_upper_bounds",14,0,2,0,1613,0,0.,0.,0,"{Nonlinear inequality constraint
                }
```

7.1.3.179 GuiKeyWord kw_176[5] [static]

Initial value:

```
{
                {"multi_objective_weights",14,0,3,0,1607,0,0.,0.,0,"{Multiobjective weightings} http://www.cs.
                {"num_nonlinear_equality_constraints",0x29,3,5,0,1619,kw_174,0.,0.,0,"{Number of nonlinear equ
                {"num_nonlinear_inequality_constraints",0x29,4,4,0,1609,kw_175,0.,0.,0,"{Number of nonlinear i
                {"objective_function_scale_types",0x80f,0,1,0,1603,0,0.,0.,0,"{Objective function scaling type
                {"objective_function_scales",0x80e,0,2,0,1605,0,0.,0.,0,"{Objective function scales} http://ww
                }
```

7.1.3.180 static KeyWord kw_177 [static]

Initial value:

```
{
                {"central",8,0,6,0,1681,0,0.,0.,0,"[CHOOSE difference interval]"},
                {"dakota",8,1,4,0,1671,kw_165,0.,0.,0,"@[CHOOSE gradient source]"},
                {"fd_gradient_step_size",0x406,0,7,0,1682,0,0.,0.,0.001},
                {"fd_step_size",0x40e,0,7,0,1683,0,0.,0.,0.001,0,"{Finite difference step size} http://www.cs.san
                {"forward",8,0,6,0,1679,0,0.,0.,0,"@"},
                {"interval_type",8,0,5,0,1677,0,0.,0.,0,"{Interval type} http://www.cs.sandia.gov/dakota/licen
                {"method_source",8,0,3,0,1669,0,0.,0.,0,"{Method source} http://www.cs.sandia.gov/dakota/licen
                {"vendor",8,0,4,0,1675}
                }
```

7.1.3.181 static KeyWord kw_178 [static]

Initial value:

```
{
                {"central",8,0,2,0,1693,0,0.,0.,0,"[CHOOSE difference interval]"},
                {"fd_hessian_step_size",6,0,1,0,1688},
                {"fd_step_size",14,0,1,0,1689,0,0.,0.,0,"{Finite difference step size} http://www.cs.sandia.go
                {"forward",8,0,2,0,1691,0,0.,0.,0,"@"}
                }
```

7.1.3.182 static KeyWord kw_179 [static]

Initial value:

```
{
                {"damped",8,0,1,0,1699,0,0.,0.,0.,0,"{Numerical safeguarding of BFGS update} http://www.cs.sa
                }
```

7.1.3.183 static KeyWord kw_180 [static]

Initial value:

```
{
                {"bfgs",8,1,1,1,1697,kw_179,0.,0.,0.,0,"[CHOOSE Hessian approx.]"},
                {"sr1",8,0,1,1,1701}
                }
```

7.1.3.184 static KeyWord kw_181 [static]

Initial value:

```
{
                {"analytic_gradients",8,0,4,2,1659,0,0.,0.,0.,0,"[CHOOSE gradient type]"},
                {"analytic_hessians",8,0,5,3,1703,0,0.,0.,0.,0,"[CHOOSE Hessian type]"},
                {"descriptors",15,0,2,0,1599,0,0.,0.,0.,0,"{Response labels} http://www.cs.sandia.gov/dakota/
                {"id_responses",11,0,1,0,1597,0,0.,0.,0.,0,"{Responses set identifier} http://www.cs.sandia.g
                {"mixed_gradients",8,10,4,2,1661,kw_166,0.,0.,0.,0,"{Mixed gradients} http://www.cs.sandia.go
                {"mixed_hessians",8,5,5,3,1705,kw_170,0.,0.,0.,0,"{Mixed Hessians} http://www.cs.sandia.gov/d
                {"no_gradients",8,0,4,2,1657,0,0.,0.,0.,0,"@"},
                {"no_hessians",8,0,5,3,1685,0,0.,0.,0.,0,"@"},
                {"num_least_squares_terms",0x29,6,3,1,1627,kw_173,0.,0.,0.,0,"[CHOOSE response type]{{Least s
                {"num_objective_functions",0x29,5,3,1,1601,kw_176,0.,0.,0.,0,"{{Optimization} Number of objec
                {"num_response_functions",0x29,0,3,1,1655,0,0.,0.,0.,0,"{{Generic responses} Number of respon
                {"numerical_gradients",8,8,4,2,1667,kw_177,0.,0.,0.,0,"{Numerical gradients} http://www.cs.sa
                {"numerical_hessians",8,4,5,3,1687,kw_178,0.,0.,0.,0,"{Numerical Hessians} http://www.cs.sand
                {"quasi_hessians",8,2,5,3,1695,kw_180,0.,0.,0.,0,"{Quasi Hessians} http://www.cs.sandia.gov/d
                {"response_descriptors",7,0,2,0,1598}
                }
```

7.1.3.185 GuiKeyWord kw_182[1] [static]

Initial value:

```
{
                {"method_list",15,0,1,1,33,0,0.,0.,0.,0,"{List of methods} http://www.cs.sandia.gov/dakota/li
                }
```

7.1.3.186 static KeyWord kw_183 [static]

Initial value:

```
{
                {"global_method_pointer",11,0,1,1,25,0,0.,0.,0.,0,"{Pointer to the global method specification} h
                {"local_method_pointer",11,0,2,2,27,0,0.,0.,0.,0,"{Pointer to the local method specification} htt
                {"local_search_probability",10,0,3,0,29,0,0.,0.,0.,0,"{Probability of executing local searches} h
                }
```

7.1.3.187 static KeyWord kw_184 [static]

Initial value:

```
{
                {"method_list",15,0,1,1,21,0,0.,0.,0.,0,"{List of methods} http://www.cs.sandia.gov/dakota/licens
                }
```

7.1.3.188 static KeyWord kw_185 [static]

Initial value:

```
{
                {"collaborative",8,1,1,1,31,kw_182,0.,0.,0.,0,"[CHOOSE hybrid type]{Collaborative hybrid} http://
                {"coupled",0,3,1,1,22,kw_183},
                {"embedded",8,3,1,1,23,kw_183,0.,0.,0.,0,"{Embedded hybrid} http://www.cs.sandia.gov/dakota/licen
                {"sequential",8,1,1,1,19,kw_184,0.,0.,0.,0,"{Sequential hybrid} http://www.cs.sandia.gov/dakota/l
                {"uncoupled",0,1,1,1,18,kw_184}
                }
```

7.1.3.189 static KeyWord kw_186 [static]

Initial value:

```
{
                {"seed",9,0,1,0,41,0,0.,0.,0.,0,"{Seed for random starting points} http://www.cs.sandia.gov/dakot
                }
```

7.1.3.190 static KeyWord kw_187 [static]

Initial value:

```
{
                {"method_pointer",11,0,1,1,37,0,0.,0.,0.,0,"{Method pointer} http://www.cs.sandia.gov/dakota/lice
                {"random_starts",9,1,2,0,39,kw_186,0.,0.,0.,0,"{Number of random starting points} http://www.cs.s
                {"starting_points",14,0,3,0,43,0,0.,0.,0.,0,"{List of user-specified starting points} http://www.
                }
```

7.1.3.191 static KeyWord kw_188 [static]

Initial value:

```
{
                {"seed",9,0,1,0,51,0,0.,0.,0.,0,"{Seed for random weighting sets} http://www.cs.sandia.gov/dal
                }
```

7.1.3.192 static KeyWord kw_189 [static]

Initial value:

```
{
                {"method_pointer",11,0,1,1,47,0,0.,0.,0.,0,"{Optimization method pointer} http://www.cs.sandi
                {"multi_objective_weight_sets",6,0,3,0,52},
                {"opt_method_pointer",3,0,1,1,46},
                {"random_weight_sets",9,1,2,0,49,kw_188,0.,0.,0.,0,"{Number of random weighting sets} http://
                {"weight_sets",14,0,3,0,53,0,0.,0.,0.,0,"{List of user-specified weighting sets} http://www.c
                }
```

7.1.3.193 static KeyWord kw_190 [static]

Initial value:

```
{
                {"method_pointer",11,0,1,0,57,0,0.,0.,0.,0,"{Method pointer} http://www.cs.sandia.gov/dakota/
                }
```

7.1.3.194 static KeyWord kw_191 [static]

Initial value:

```
{
                {"tabular_graphics_file",11,0,1,0,7,0,0.,0.,0.,0,"{File name for tabular graphics data} http:
                }
```

7.1.3.195 static KeyWord kw_192 [static]

Initial value:

```
{
                {"graphics",8,0,1,0,3,0,0.,0.,0.,0,"{Graphics flag} http://www.cs.sandia.gov/dakota/licensing
                {"hybrid",8,5,7,1,17,kw_185,0.,0.,0.,0,"[CHOOSE strategy type]{Hybrid strategy} http://www.cs
                {"iterator_self_scheduling",8,0,5,0,13,0,0.,0.,0.,0,"{Self-scheduling of iterator jobs} http:
                {"iterator_servers",9,0,4,0,11,0,0.,0.,0.,0,"{Number of iterator servers} http://www.cs.sandi
                {"iterator_static_scheduling",8,0,6,0,15,0,0.,0.,0.,0,"{Static scheduling of iterator jobs} h
                {"multi_start",8,3,7,1,35,kw_187,0.,0.,0.,0,"{Multi-start iteration strategy} http://www.cs.s
```

```
{"output_precision",0x29,0,3,0,9,0,0.,0.,0.,0,"{Numeric output precision} http://www.cs.sandia.go
{"pareto_set",8,5,7,1,45,kw_189,0.,0.,0.,0,"{Pareto set optimization strategy} http://www.cs.sand
{"single_method",8,1,7,1,55,kw_190,0.,0.,0.,0,"@{Single method strategy} http://www.cs.sandia.gov
{"tabular_graphics_data",8,1,2,0,5,kw_191,0.,0.,0.,0,"{Tabulation of graphics data} http://www.cs
}
```

7.1.3.196 static KeyWord kw_193 [static]

Initial value:

```
{
{"alphas",14,0,1,1,1347,0,0.,0.,0.,0,"{beta uncertain alphas} http://www.cs.sandia.gov/dakota/lic
{"betas",14,0,2,2,1349,0,0.,0.,0.,0,"{beta uncertain betas} http://www.cs.sandia.gov/dakota/licen
{"buv_alphas",6,0,1,1,1346,0,0.,0.,0.,0,0,0,"beta_uncertain"},
{"buv_betas",6,0,2,2,1348,0,0.,0.,0.,0,0,0,"beta_uncertain"},
{"buv_descriptors",7,0,5,0,1354,0,0.,0.,0.,0,0,0,"beta_uncertain"},
{"buv_lower_bounds",6,0,3,3,1350,0,0.,0.,0.,0,0,0,"beta_uncertain"},
{"buv_upper_bounds",6,0,4,4,1352,0,0.,0.,0.,0,0,0,"beta_uncertain"},
{"descriptors",15,0,5,0,1355,0,0.,0.,0.,0,"{Descriptors} http://www.cs.sandia.gov/dakota/licensin
{"lower_bounds",14,0,3,3,1351,0,0.,0.,0.,0,"{Distribution lower bounds} http://www.cs.sandia.gov/
{"upper_bounds",14,0,4,4,1353,0,0.,0.,0.,0,"{Distribution upper bounds} http://www.cs.sandia.gov/
}
```

7.1.3.197 static KeyWord kw_194 [static]

Initial value:

```
{
{"descriptors",15,0,3,0,1413,0,0.,0.,0.,0,"{Descriptors} http://www.cs.sandia.gov/dakota/licensin
{"num_trials",13,0,2,2,1411,0,0.,0.,0.,0,"{binomial uncertain num_trials} http://www.cs.sandia.go
{"prob_per_trial",14,0,1,1,1409,0,0.,0.,0.,0,"{binomial uncertain prob_per_trial} http://www.cs.s
}
```

7.1.3.198 static KeyWord kw_195 [static]

Initial value:

```
{
{"cdv_descriptors",7,0,6,0,1250,0,0.,0.,0.,0,0,0,"continuous_design"},
{"cdv_initial_point",6,0,1,0,1240,0,0.,0.,0.,0,0,0,"continuous_design"},
{"cdv_lower_bounds",6,0,2,0,1242,0,0.,0.,0.,0,0,0,"continuous_design"},
{"cdv_scale_types",0x807,0,4,0,1246,0,0.,0.,0.,0,0,0,"continuous_design"},
{"cdv_scales",0x806,0,5,0,1248,0,0.,0.,0.,0,0,0,"continuous_design"},
{"cdv_upper_bounds",6,0,3,0,1244,0,0.,0.,0.,0,0,0,"continuous_design"},
{"descriptors",15,0,6,0,1251,0,0.,0.,0.,0,"{Descriptors} http://www.cs.sandia.gov/dakota/licensin
{"initial_point",14,0,1,0,1241,0,0.,0.,0.,0,"{Initial point} http://www.cs.sandia.gov/dakota/lice
{"lower_bounds",14,0,2,0,1243,0,0.,0.,0.,0,"{Lower bounds} http://www.cs.sandia.gov/dakota/licens
{"scale_types",0x80f,0,4,0,1247,0,0.,0.,0.,0,"{Scaling types} http://www.cs.sandia.gov/dakota/lic
{"scales",0x80e,0,5,0,1249,0,0.,0.,0.,0,"{Scales} http://www.cs.sandia.gov/dakota/licensing/votd/
{"upper_bounds",14,0,3,0,1245,0,0.,0.,0.,0,"{Upper bounds} http://www.cs.sandia.gov/dakota/licens
}
```

7.1.3.199 static KeyWord kw_196 [static]

Initial value:

```
{
                {"csv_descriptors",7,0,4,0,1468,0,0.,0.,0.,0,0,0,"continuous_state"},
                {"csv_initial_state",6,0,1,0,1462,0,0.,0.,0.,0,0,0,"continuous_state"},
                {"csv_lower_bounds",6,0,2,0,1464,0,0.,0.,0.,0,0,0,"continuous_state"},
                {"csv_upper_bounds",6,0,3,0,1466,0,0.,0.,0.,0,0,0,"continuous_state"},
                {"descriptors",15,0,4,0,1469,0,0.,0.,0.,0,"{Descriptors} http://www.cs.sandia.gov/dakota/lice
                {"initial_state",14,0,1,0,1463,0,0.,0.,0.,0,"{Initial states} http://www.cs.sandia.gov/dakota
                {"lower_bounds",14,0,2,0,1465,0,0.,0.,0.,0,"{Lower bounds} http://www.cs.sandia.gov/dakota/li
                {"upper_bounds",14,0,3,0,1467,0,0.,0.,0.,0,"{Upper bounds} http://www.cs.sandia.gov/dakota/li
                }
```

7.1.3.200 static KeyWord kw_197 [static]

Initial value:

```
{
                {"ddv_descriptors",7,0,4,0,1260,0,0.,0.,0.,0,0,0,"discrete_design_range"},
                {"ddv_initial_point",5,0,1,0,1254,0,0.,0.,0.,0,0,0,"discrete_design_range"},
                {"ddv_lower_bounds",5,0,2,0,1256,0,0.,0.,0.,0,0,0,"discrete_design_range"},
                {"ddv_upper_bounds",5,0,3,0,1258,0,0.,0.,0.,0,0,0,"discrete_design_range"},
                {"descriptors",15,0,4,0,1261,0,0.,0.,0.,0,"{Descriptors} http://www.cs.sandia.gov/dakota/lice
                {"initial_point",13,0,1,0,1255,0,0.,0.,0.,0,"{Initial point} http://www.cs.sandia.gov/dakota/
                {"lower_bounds",13,0,2,0,1257,0,0.,0.,0.,0,"{Lower bounds} http://www.cs.sandia.gov/dakota/li
                {"upper_bounds",13,0,3,0,1259,0,0.,0.,0.,0,"{Upper bounds} http://www.cs.sandia.gov/dakota/li
                }
```

7.1.3.201 static KeyWord kw_198 [static]

Initial value:

```
{
                {"descriptors",15,0,4,0,1271,0,0.,0.,0.,0,"{Descriptors} http://www.cs.sandia.gov/dakota/lice
                {"initial_point",13,0,1,0,1265,0,0.,0.,0.,0,"{Initial point} http://www.cs.sandia.gov/dakota/
                {"num_set_values",13,0,2,0,1267,0,0.,0.,0.,0,"{Number of values for each variable} http://www
                {"set_values",13,0,3,1,1269,0,0.,0.,0.,0,"{Set values} http://www.cs.sandia.gov/dakota/licens
                }
```

7.1.3.202 static KeyWord kw_199 [static]

Initial value:

```
{
                {"descriptors",15,0,4,0,1281,0,0.,0.,0.,0,"{Descriptors} http://www.cs.sandia.gov/dakota/lice
                {"initial_point",14,0,1,0,1275,0,0.,0.,0.,0,"{Initial point} http://www.cs.sandia.gov/dakota/
                {"num_set_values",13,0,2,0,1277,0,0.,0.,0.,0,"{Number of values for each variable} http://www
                {"set_values",14,0,3,1,1279,0,0.,0.,0.,0,"{Set values} http://www.cs.sandia.gov/dakota/licens
                }
```

7.1.3.203 static KeyWord kw_200 [static]

Initial value:

```
{
                {"descriptors",15,0,4,0,1479,0,0.,0.,0.,0,"{Descriptors} http://www.cs.sandia.gov/dakota/licensin
                {"dsv_descriptors",7,0,4,0,1478,0,0.,0.,0.,0,0,0,"discrete_state_range"},
                {"dsv_initial_state",5,0,1,0,1472,0,0.,0.,0.,0,0,0,"discrete_state_range"},
                {"dsv_lower_bounds",5,0,2,0,1474,0,0.,0.,0.,0,0,0,"discrete_state_range"},
                {"dsv_upper_bounds",5,0,3,0,1476,0,0.,0.,0.,0,0,0,"discrete_state_range"},
                {"initial_state",13,0,1,0,1473,0,0.,0.,0.,0,"{Initial states} http://www.cs.sandia.gov/dakota/lic
                {"lower_bounds",13,0,2,0,1475,0,0.,0.,0.,0,"{Lower bounds} http://www.cs.sandia.gov/dakota/licens
                {"upper_bounds",13,0,3,0,1477,0,0.,0.,0.,0,"{Upper bounds} http://www.cs.sandia.gov/dakota/licens
                }
```

7.1.3.204 static KeyWord kw_201 [static]

Initial value:

```
{
                {"descriptors",15,0,4,0,1489,0,0.,0.,0.,0,"{Descriptors} http://www.cs.sandia.gov/dakota/licensin
                {"initial_state",13,0,1,0,1483,0,0.,0.,0.,0,"{Initial state} http://www.cs.sandia.gov/dakota/lice
                {"num_set_values",13,0,2,0,1485,0,0.,0.,0.,0,"{Number of values for each variable} http://www.cs.
                {"set_values",13,0,3,1,1487,0,0.,0.,0.,0,"{Set values} http://www.cs.sandia.gov/dakota/licensing/
                }
```

7.1.3.205 static KeyWord kw_202 [static]

Initial value:

```
{
                {"descriptors",15,0,4,0,1499,0,0.,0.,0.,0,"{Descriptors} http://www.cs.sandia.gov/dakota/licensin
                {"initial_state",14,0,1,0,1493,0,0.,0.,0.,0,"{Initial state} http://www.cs.sandia.gov/dakota/lice
                {"num_set_values",13,0,2,0,1495,0,0.,0.,0.,0,"{Number of values for each variable} http://www.cs.
                {"set_values",14,0,3,1,1497,0,0.,0.,0.,0,"{Set values} http://www.cs.sandia.gov/dakota/licensing/
                }
```

7.1.3.206 static KeyWord kw_203 [static]

Initial value:

```
{
                {"betas",14,0,1,1,1341,0,0.,0.,0.,0,"{exponential uncertain betas} http://www.cs.sandia.gov/dakot
                {"descriptors",15,0,2,0,1343,0,0.,0.,0.,0,"{Descriptors} http://www.cs.sandia.gov/dakota/licensin
                {"euv_betas",6,0,1,1,1340,0,0.,0.,0.,0,0,0,"exponential_uncertain"},
                {"euv_descriptors",7,0,2,0,1342,0,0.,0.,0.,0,0,0,"exponential_uncertain"}
                }
```

7.1.3.207 static KeyWord kw_204 [static]

Initial value:

```
{
                {"alphas",14,0,1,1,1375,0,0.,0.,0.,0,"{frechet uncertain alphas} http://www.cs.sandia.gov/dak
                {"betas",14,0,2,2,1377,0,0.,0.,0.,0,"{frechet uncertain betas} http://www.cs.sandia.gov/dakot
                {"descriptors",15,0,3,0,1379,0,0.,0.,0.,0,"{Descriptors} http://www.cs.sandia.gov/dakota/lice
                {"fuv_alphas",6,0,1,1,1374,0,0.,0.,0.,0,0,0,"frechet_uncertain"},
                {"fuv_betas",6,0,2,2,1376,0,0.,0.,0.,0,0,0,"frechet_uncertain"},
                {"fuv_descriptors",7,0,3,0,1378,0,0.,0.,0.,0,0,0,"frechet_uncertain"}
                }
```

7.1.3.208 static KeyWord kw_205 [static]

Initial value:

```
{
                {"alphas",14,0,1,1,1359,0,0.,0.,0.,0,"{gamma uncertain alphas} http://www.cs.sandia.gov/dakot
                {"betas",14,0,2,2,1361,0,0.,0.,0.,0,"{gamma uncertain betas} http://www.cs.sandia.gov/dakota/
                {"descriptors",15,0,3,0,1363,0,0.,0.,0.,0,"{Descriptors} http://www.cs.sandia.gov/dakota/lice
                {"gauv_alphas",6,0,1,1,1358,0,0.,0.,0.,0,0,0,"gamma_uncertain"},
                {"gauv_betas",6,0,2,2,1360,0,0.,0.,0.,0,0,0,"gamma_uncertain"},
                {"gauv_descriptors",7,0,3,0,1362,0,0.,0.,0.,0,0,0,"gamma_uncertain"}
                }
```

7.1.3.209 static KeyWord kw_206 [static]

Initial value:

```
{
                {"descriptors",15,0,2,0,1427,0,0.,0.,0.,0,"{Descriptors} http://www.cs.sandia.gov/dakota/lice
                {"prob_per_trial",14,0,1,1,1425,0,0.,0.,0.,0,"{geometric uncertain prob_per_trial} http://www
                }
```

7.1.3.210 static KeyWord kw_207 [static]

Initial value:

```
{
                {"alphas",14,0,1,1,1367,0,0.,0.,0.,0,"{gumbel uncertain alphas} http://www.cs.sandia.gov/dako
                {"betas",14,0,2,2,1369,0,0.,0.,0.,0,"{gumbel uncertain betas} http://www.cs.sandia.gov/dakota
                {"descriptors",15,0,3,0,1371,0,0.,0.,0.,0,"{Descriptors} http://www.cs.sandia.gov/dakota/lice
                {"guuv_alphas",6,0,1,1,1366,0,0.,0.,0.,0,0,0,"gumbel_uncertain"},
                {"guuv_betas",6,0,2,2,1368,0,0.,0.,0.,0,0,0,"gumbel_uncertain"},
                {"guuv_descriptors",7,0,3,0,1370,0,0.,0.,0.,0,0,0,"gumbel_uncertain"}
                }
```

7.1.3.211 static KeyWord kw_208 [static]

Initial value:

```
{
                {"abscissas",14,0,2,1,1393,0,0.,0.,0.,0,"{sets of abscissas for bin-based histogram variables} ht
                {"counts",14,0,3,2,1397,0,0.,0.,0.,0,"{sets of counts for bin-based histogram variables} http://w
                {"descriptors",15,0,4,0,1399,0,0.,0.,0.,0,"{Descriptors} http://www.cs.sandia.gov/dakota/licensin
                {"huv_bin_abscissas",6,0,2,1,1392},
                {"huv_bin_counts",6,0,3,2,1396},
                {"huv_bin_descriptors",7,0,4,0,1398,0,0.,0.,0.,0,0,0,"histogram_bin_uncertain"},
                {"huv_bin_ordinates",6,0,3,2,1394},
                {"huv_num_bin_pairs",5,0,1,0,1390,0,0.,0.,0.,0,0,0,"histogram_bin_uncertain"},
                {"num_pairs",13,0,1,0,1391,0,0.,0.,0.,0,"{key to apportionment among bin-based histogram variable
                {"ordinates",14,0,3,2,1395,0,0.,0.,0.,0,"{sets of ordinates for bin-based histogram variables} ht
                }
```

7.1.3.212 GuiKeyWord kw_209[8] [static]

Initial value:

```
{
                {"abscissas",14,0,2,1,1443,0,0.,0.,0.,0,"{sets of abscissas for point-based histogram variables}
                {"counts",14,0,3,2,1445,0,0.,0.,0.,0,"{sets of counts for point-based histogram variables} http:/
                {"descriptors",15,0,4,0,1447,0,0.,0.,0.,0,"{Descriptors} http://www.cs.sandia.gov/dakota/licensin
                {"huv_num_point_pairs",5,0,1,0,1440,0,0.,0.,0.,0,0,0,"histogram_point_uncertain"},
                {"huv_point_abscissas",6,0,2,1,1442},
                {"huv_point_counts",6,0,3,2,1444},
                {"huv_point_descriptors",7,0,4,0,1446,0,0.,0.,0.,0,0,0,"histogram_point_uncertain"},
                {"num_pairs",13,0,1,0,1441,0,0.,0.,0.,0,"{key to apportionment among point-based histogram variab
                }
```

7.1.3.213 static KeyWord kw_210 [static]

Initial value:

```
{
                {"descriptors",15,0,4,0,1437,0,0.,0.,0.,0,"{Descriptors} http://www.cs.sandia.gov/dakota/licensin
                {"num_drawn",13,0,3,3,1435,0,0.,0.,0.,0,"{hypergeometric uncertain num_drawn } http://www.cs.sand
                {"selected_population",13,0,2,2,1433,0,0.,0.,0.,0,"{hypergeometric uncertain selected_population}
                {"total_population",13,0,1,1,1431,0,0.,0.,0.,0,"{hypergeometric uncertain total_population} http:
                }
```

7.1.3.214 static KeyWord kw_211 [static]

Initial value:

```
{
                {"descriptors",15,0,4,0,1459,0,0.,0.,0.,0,"{Descriptors} http://www.cs.sandia.gov/dakota/licensin
                {"interval_bounds",14,0,3,2,1457,0,0.,0.,0.,0,"{bounds per interval} http://www.cs.sandia.gov/dak
                {"interval_probs",14,0,2,1,1455,0,0.,0.,0.,0,"{basic probability assignments per interval} http:/
```

```
                {"iuv_descriptors",7,0,4,0,1458,0,0.,0.,0.,0,0,0,"interval_uncertain"},
                {"iuv_interval_bounds",6,0,3,2,1456},
                {"iuv_interval_probs",6,0,2,1,1454},
                {"iuv_num_intervals",5,0,1,0,1452,0,0.,0.,0.,0,0,0,"interval_uncertain"},
                {"num_intervals",13,0,1,0,1453,0,0.,0.,0.,0,"{number of intervals defined for each interval v
                }
```

7.1.3.215 static KeyWord kw_212 [static]

Initial value:

```
{
                {"lnuv_zetas",6,0,1,1,1298,0,0.,0.,0.,0,0,0,"lognormal_uncertain"},
                {"zetas",14,0,1,1,1299,0,0.,0.,0.,0,"{lognormal uncertain zetas} http://www.cs.sandia.gov/dak
                }
```

7.1.3.216 static KeyWord kw_213 [static]

Initial value:

```
{
                {"error_factors",14,0,1,1,1305,0,0.,0.,0.,0,"[CHOOSE variance spec.]{lognormal uncertain erro
                {"lnuv_error_factors",6,0,1,1,1304,0,0.,0.,0.,0,0,0,"lognormal_uncertain"},
                {"lnuv_std_deviations",6,0,1,1,1302,0,0.,0.,0.,0,0,0,"lognormal_uncertain"},
                {"std_deviations",14,0,1,1,1303,0,0.,0.,0.,0,"@{lognormal uncertain standard deviations} http
                }
```

7.1.3.217 static KeyWord kw_214 [static]

Initial value:

```
{
                {"descriptors",15,0,4,0,1311,0,0.,0.,0.,0,"{Descriptors} http://www.cs.sandia.gov/dakota/lice
                {"lambdas",14,2,1,1,1297,kw_212,0.,0.,0.,0,"[CHOOSE characterization]{lognormal uncertain lam
                {"lnuv_descriptors",7,0,4,0,1310,0,0.,0.,0.,0,0,0,"lognormal_uncertain"},
                {"lnuv_lambdas",6,2,1,1,1296,kw_212,0.,0.,0.,0,0,0,"lognormal_uncertain"},
                {"lnuv_lower_bounds",6,0,2,0,1306,0,0.,0.,0.,0,0,0,"lognormal_uncertain"},
                {"lnuv_means",6,4,1,1,1300,kw_213,0.,0.,0.,0,0,0,"lognormal_uncertain"},
                {"lnuv_upper_bounds",6,0,3,0,1308,0,0.,0.,0.,0,0,0,"lognormal_uncertain"},
                {"lower_bounds",14,0,2,0,1307,0,0.,0.,0.,0,"{Distribution lower bounds} http://www.cs.sandia.
                {"means",14,4,1,1,1301,kw_213,0.,0.,0.,0,"@{lognormal uncertain means} http://www.cs.sandia.g
                {"upper_bounds",14,0,3,0,1309,0,0.,0.,0.,0,"{Distribution upper bounds} http://www.cs.sandia.
                }
```

7.1.3.218 static KeyWord kw_215 [static]

Initial value:

```
{
                {"descriptors",15,0,3,0,1327,0,0.,0.,0.,0,"{Descriptors} http://www.cs.sandia.gov/dakota/licensin
                {"lower_bounds",14,0,1,1,1323,0,0.,0.,0.,0,"{Distribution lower bounds} http://www.cs.sandia.gov/
                {"luuv_descriptors",7,0,3,0,1326,0,0.,0.,0.,0,0,0,"loguniform_uncertain"},
                {"luuv_lower_bounds",6,0,1,1,1322,0,0.,0.,0.,0,0,0,"loguniform_uncertain"},
                {"luuv_upper_bounds",6,0,2,2,1324,0,0.,0.,0.,0,0,0,"loguniform_uncertain"},
                {"upper_bounds",14,0,2,2,1325,0,0.,0.,0.,0,"{Distribution upper bounds} http://www.cs.sandia.gov/
                }
```

7.1.3.219 static KeyWord kw_216 [static]

Initial value:

```
{
                {"descriptors",15,0,3,0,1421,0,0.,0.,0.,0,"{Descriptors} http://www.cs.sandia.gov/dakota/licensin
                {"num_trials",13,0,2,2,1419,0,0.,0.,0.,0,"{negative binomial uncertain success num_trials} http:/
                {"prob_per_trial",14,0,1,1,1417,0,0.,0.,0.,0,"{negative binomial uncertain success prob_per_trial
                }
```

7.1.3.220 static KeyWord kw_217 [static]

Initial value:

```
{
                {"descriptors",15,0,5,0,1293,0,0.,0.,0.,0,"{Descriptors} http://www.cs.sandia.gov/dakota/licensin
                {"lower_bounds",14,0,3,0,1289,0,0.,0.,0.,0,"{Distribution lower bounds} http://www.cs.sandia.gov/
                {"means",14,0,1,1,1285,0,0.,0.,0.,0,"{normal uncertain means} http://www.cs.sandia.gov/dakota/lic
                {"nuv_descriptors",7,0,5,0,1292,0,0.,0.,0.,0,0,0,"normal_uncertain"},
                {"nuv_lower_bounds",6,0,3,0,1288,0,0.,0.,0.,0,0,0,"normal_uncertain"},
                {"nuv_means",6,0,1,1,1284,0,0.,0.,0.,0,0,0,"normal_uncertain"},
                {"nuv_std_deviations",6,0,2,2,1286,0,0.,0.,0.,0,0,0,"normal_uncertain"},
                {"nuv_upper_bounds",6,0,4,0,1290,0,0.,0.,0.,0,0,0,"normal_uncertain"},
                {"std_deviations",14,0,2,2,1287,0,0.,0.,0.,0,"{normal uncertain standard deviations} http://www.c
                {"upper_bounds",14,0,4,0,1291,0,0.,0.,0.,0,"{Distribution upper bounds} http://www.cs.sandia.gov/
                }
```

7.1.3.221 static KeyWord kw_218 [static]

Initial value:

```
{
                {"descriptors",15,0,2,0,1405,0,0.,0.,0.,0,"{Descriptors} http://www.cs.sandia.gov/dakota/licensin
                {"lambdas",14,0,1,1,1403,0,0.,0.,0.,0,"{poisson uncertain lambdas} http://www.cs.sandia.gov/dakot
                }
```

7.1.3.222 static KeyWord kw_219 [static]

Initial value:

```
{
                {"descriptors",15,0,4,0,1337,0,0.,0.,0.,0,"{Descriptors} http://www.cs.sandia.gov/dakota/lice
                {"lower_bounds",14,0,2,2,1333,0,0.,0.,0.,0,"{Distribution lower bounds} http://www.cs.sandia.
                {"modes",14,0,1,1,1331,0,0.,0.,0.,0,"{triangular uncertain modes} http://www.cs.sandia.gov/da
                {"tuv_descriptors",7,0,4,0,1336,0,0.,0.,0.,0,0,0,"triangular_uncertain"},
                {"tuv_lower_bounds",6,0,2,2,1332,0,0.,0.,0.,0,0,0,"triangular_uncertain"},
                {"tuv_modes",6,0,1,1,1330,0,0.,0.,0.,0,0,0,"triangular_uncertain"},
                {"tuv_upper_bounds",6,0,3,3,1334,0,0.,0.,0.,0,0,0,"triangular_uncertain"},
                {"upper_bounds",14,0,3,3,1335,0,0.,0.,0.,0,"{Distribution upper bounds} http://www.cs.sandia.
                }
```

7.1.3.223 GuiKeyWord kw_220[6] [static]

Initial value:

```
{
                {"descriptors",15,0,3,0,1319,0,0.,0.,0.,0,"{Descriptors} http://www.cs.sandia.gov/dakota/lice
                {"lower_bounds",14,0,1,1,1315,0,0.,0.,0.,0,"{Distribution lower bounds} http://www.cs.sandia.
                {"upper_bounds",14,0,2,2,1317,0,0.,0.,0.,0,"{Distribution upper bounds} http://www.cs.sandia.
                {"uuv_descriptors",7,0,3,0,1318,0,0.,0.,0.,0,0,0,"uniform_uncertain"},
                {"uuv_lower_bounds",6,0,1,1,1314,0,0.,0.,0.,0,0,0,"uniform_uncertain"},
                {"uuv_upper_bounds",6,0,2,2,1316,0,0.,0.,0.,0,0,0,"uniform_uncertain"}
                }
```

7.1.3.224 static KeyWord kw_221 [static]

Initial value:

```
{
                {"alphas",14,0,1,1,1383,0,0.,0.,0.,0,"{weibull uncertain alphas} http://www.cs.sandia.gov/dak
                {"betas",14,0,2,2,1385,0,0.,0.,0.,0,"{weibull uncertain betas} http://www.cs.sandia.gov/dakot
                {"descriptors",15,0,3,0,1387,0,0.,0.,0.,0,"{Descriptors} http://www.cs.sandia.gov/dakota/lice
                {"wuv_alphas",6,0,1,1,1382,0,0.,0.,0.,0,0,0,"weibull_uncertain"},
                {"wuv_betas",6,0,2,2,1384,0,0.,0.,0.,0,0,0,"weibull_uncertain"},
                {"wuv_descriptors",7,0,3,0,1386,0,0.,0.,0.,0,0,0,"weibull_uncertain"}
                }
```

7.1.3.225 static KeyWord kw_223 [static]

Initial value:

```
{
                {"interface",0x308,10,5,5,1501,kw_9,0.,0.,0.,0,"{Interface} An interface specifies how functi
                {"method",0x308,75,2,2,59,kw_141,0.,0.,0.,0,"{Method} A method specifies the name and control
                {"model",8,6,3,3,1063,kw_164,0.,0.,0.,0,"{Model} A model consists of a model type and maps sp
                {"responses",0x308,15,6,6,1595,kw_181,0.,0.,0.,0,"{Responses} A responses object specifies th
                {"strategy",0x108,10,1,1,1,kw_192,0.,0.,0.,0,"{Strategy} The strategy specifies the top level
                {"variables",0x308,29,4,4,1235,kw_222,0.,0.,0.,0,"{Variables} A variables object specifies th
                }
```

7.1.3.226 KeyWord kw_1[3] [static]

Initial value:

```
{
                {"active_set_vector",8,0,1,0,0,0.,0.,0,N_ifm(false,activeSetVectorFlag)},
                {"evaluation_cache",8,0,2,0,0,0.,0.,0,N_ifm(false,evalCacheFlag)},
                {"restart_file",8,0,3,0,0,0.,0.,0,N_ifm(false,restartFileFlag)}
                }
```

862 distinct keywords (plus 103 aliases)

7.1.3.227 KeyWord kw_2[1] [static]

Initial value:

```
{
                {"processors_per_analysis",9,0,1,0,0,0.,0.,0,N_ifm(pint,procsPerAnalysis)}
                }
```

7.1.3.228 KeyWord kw_3[4] [static]

Initial value:

```
{
                {"abort",8,0,1,1,0,0.,0.,0,N_ifm(lit,failAction_abort)},
                {"continuation",8,0,1,1,0,0.,0.,0,N_ifm(lit,failAction_continuation)},
                {"recover",14,0,1,1,0,0.,0.,0,N_ifm(Rlit,3failAction_recover)},
                {"retry",9,0,1,1,0,0.,0.,0,N_ifm(ilit,3failAction_retry)}
                }
```

7.1.3.229 KeyWord kw_4[2] [static]

Initial value:

```
{
                {"copy",8,0,1,0,0,0.,0.,0,N_ifm(true,templateCopy)},
                {"replace",8,0,2,0,0,0.,0.,0,N_ifm(true,templateReplace)}
                }
```

7.1.3.230 KeyWord kw_5[7] [static]

Initial value:

```
{
                {"dir_save",0,0,3,0,0,0.,0.,2,N_ifm(true,dirSave)},
                {"dir_tag",0,0,2,0,0,0.,0.,2,N_ifm(true,dirTag)},
```

```
                {"directory_save",8,0,3,0,0,0.,0.,0,N_ifm(true,dirSave)},
                {"directory_tag",8,0,2,0,0,0.,0.,0,N_ifm(true,dirTag)},
                {"named",11,0,1,0,0,0.,0.,0,N_ifm(str,workDir)},
                {"template_directory",11,2,4,0,kw_4,0.,0.,0,N_ifm(str,templateDir)},
                {"template_files",15,2,4,0,kw_4,0.,0.,0,N_ifm(strL,templateFiles)}
                }
```

7.1.3.231 KeyWord kw_6[8] [static]

Initial value:

```
{
                {"allow_existing_results",8,0,3,0,0,0.,0.,0,N_ifm(true,allowExistingResultsFlag)},
                {"aprepro",8,0,5,0,0,0.,0.,0,N_ifm(true,apreproFlag)},
                {"file_save",8,0,7,0,0,0.,0.,0,N_ifm(true,fileSaveFlag)},
                {"file_tag",8,0,6,0,0,0.,0.,0,N_ifm(true,fileTagFlag)},
                {"parameters_file",11,0,1,0,0,0.,0.,0,N_ifm(str,parametersFile)},
                {"results_file",11,0,2,0,0,0.,0.,0,N_ifm(str,resultsFile)},
                {"verbatim",8,0,4,0,0,0.,0.,0,N_ifm(true,verbatimFlag)},
                {"work_directory",8,7,8,0,kw_5,0.,0.,0,N_ifm(true,useWorkdir)}
                }
```

7.1.3.232 KeyWord kw_7[9] [static]

Initial value:

```
{
                {"analysis_components",15,0,1,0,0,0.,0.,0,N_ifm(str2D,analysisComponents)},
                {"deactivate",8,3,6,0,kw_1},
                {"direct",8,1,4,1,kw_2,0.,0.,0,N_ifm(lit,interfaceType_direct)},
                {"failure_capture",8,4,5,0,kw_3},
                {"fork",8,8,4,1,kw_6,0.,0.,0,N_ifm(lit,interfaceType_fork)},
                {"grid",8,0,4,1,0,0.,0.,0,N_ifm(lit,interfaceType_grid)},
                {"input_filter",11,0,2,0,0,0.,0.,0,N_ifm(str,inputFilter)},
                {"output_filter",11,0,3,0,0,0.,0.,0,N_ifm(str,outputFilter)},
                {"system",8,8,4,1,kw_6,0.,0.,0,N_ifm(lit,interfaceType_system)}
                }
```

7.1.3.233 KeyWord kw_8[4] [static]

Initial value:

```
{
                {"analysis_concurrency",9,0,3,0,0,0.,0.,0,N_ifm(pint,asynchLocalAnalysisConcurrency)},
                {"evaluation_concurrency",9,0,1,0,0,0.,0.,0,N_ifm(pint,asynchLocalEvalConcurrency)},
                {"local_evaluation_self_scheduling",8,0,2,0,0,0.,0.,0,N_ifm(lit,asynchLocalEvalScheduling_sel
                {"local_evaluation_static_scheduling",8,0,2,0,0,0.,0.,0,N_ifm(lit,asynchLocalEvalScheduling_s
                }
```

7.1.3.234 KeyWord kw_9[10] [static]

Initial value:

```
{
                {"algebraic_mappings",11,0,2,0,0,0.,0.,0,N_ifm(str,algebraicMappings)},
                {"analysis_drivers",15,9,3,0,kw_7,0.,0.,0,N_ifm(strL,analysisDrivers)},
                {"analysis_self_scheduling",8,0,8,0,0,0.,0.,0,N_ifm(lit,analysisScheduling_self)},
                {"analysis_servers",9,0,7,0,0,0.,0.,0,N_ifm(pint,analysisServers)},
                {"analysis_static_scheduling",8,0,8,0,0,0.,0.,0,N_ifm(lit,analysisScheduling_static)},
                {"asynchronous",8,4,4,0,kw_8,0.,0.,0,N_ifm(lit,interfaceSynchronization_asynchronous)},
                {"evaluation_self_scheduling",8,0,6,0,0,0.,0.,0,N_ifm(lit,evalScheduling_self)},
                {"evaluation_servers",9,0,5,0,0,0.,0.,0,N_ifm(pint,evalServers)},
                {"evaluation_static_scheduling",8,0,6,0,0,0.,0.,0,N_ifm(lit,evalScheduling_static)},
                {"id_interface",11,0,1,0,0,0.,0.,0,N_ifm(str,idInterface)}
                }
```

7.1.3.235 KeyWord kw_20[2] [static]

Initial value:

```
{
                {"initial_delta",10,0,1,1,0,0.,0.,0,N_mdm(Real,initDelta)},
                {"threshold_delta",10,0,2,2,0,0.,0.,0,N_mdm(Real,threshDelta)}
                }
```

7.1.3.236 KeyWord kw_21[3] [static]

Initial value:

```
{
                {0,0,5,0,0,kw_19},
                {0,0,2,0,0,kw_20},
                {""}
                }
```

7.1.3.237 KeyWord kw_22[2] [static]

Initial value:

```
{
                {"all_dimensions",8,0,1,1,0,0.,0.,0,N_mdm(lit,boxDivision_all_dimensions)},
                {"major_dimension",8,0,1,1,0,0.,0.,0,N_mdm(lit,boxDivision_major_dimension)}
                }
```

7.1.3.238 KeyWord kw_26[3] [static]

Initial value:

```
{
                {"flat_file",11,0,1,1,0,0.,0.,0,N_mdm(slit2,3initializationType_flat_file)},
                {"simple_random",8,0,1,1,0,0.,0.,0,N_mdm(lit,initializationType_random)},
                {"unique_random",8,0,1,1,0,0.,0.,0,N_mdm(lit,initializationType_unique_random)}
                }
```

7.1.3.239 KeyWord kw_27[2] [static]

Initial value:

```
{
                {"mutation_range",9,0,2,0,0,0.,0.,0,N_mdm(int,mutationRange)},
                {"mutation_scale",10,0,1,0,0,0.,0.,0,N_mdm(Real,mutationScale)}
                }
```

7.1.3.240 KeyWord kw_34[2] [static]

Initial value:

```
{
                {"blocking",8,0,1,1,0,0.,0.,0,N_mdm(lit,evalSynchronization_blocking)},
                {"nonblocking",8,0,1,1,0,0.,0.,0,N_mdm(lit,evalSynchronization_nonblocking)}
                }
```

7.1.3.241 KeyWord kw_37[1] [static]

Initial value:

```
{
                {"drop_tolerance",10,0,1,0,0,0.,0.,0,N_mdm(Real,vbdDropTolerance)}
                }
```

7.1.3.242 KeyWord kw_44[1] [static]

Initial value:

```
{
                {"drop_tolerance",10,0,1,0,0,0.,0.,0,N_mdm(Real,vbdDropTolerance)}
                }
```

7.1.3.243 KeyWord kw_48[2] [static]

Initial value:

```
{
                {"complementary",8,0,1,1,0,0.,0.,0,N_mdm(lit,distributionType_complementary)},
                {"cumulative",8,0,1,1,0,0.,0.,0,N_mdm(lit,distributionType_cumulative)}
                }
```

7.1.3.244 KeyWord kw_56[2] [static]

Initial value:

```
{
                {"mt19937",8,0,1,1,0,0.,0.,0,N_mdm(lit,rngName_mt19937)},
                {"rnum2",8,0,1,1,0,0.,0.,0,N_mdm(lit,rngName_rnum2)}
                }
```

7.1.3.245 KeyWord kw_63[2] [static]

Initial value:

```
{
                {"compute",8,2,2,0,kw_62},
                {"num_response_levels",13,0,1,0,0,0.,0.,0,N_mdm(num_resplevs,responseLevels)}
                }
```

7.1.3.246 KeyWord kw_66[2] [static]

Initial value:

```
{
                {"gen_reliabilities",8,0,1,1,0,0.,0.,0,N_mdm(lit,responseLevelMappingType_gen_reliabilities)},
                {"probabilities",8,0,1,1,0,0.,0.,0,N_mdm(lit,responseLevelMappingType_probabilities)}
                }
```

7.1.3.247 KeyWord kw_67[2] [static]

Initial value:

```
{
                {"compute",8,2,2,0,kw_66},
                {"num_response_levels",13,0,1,0,0,0.,0.,0,N_mdm(num_resplevs,responseLevels)}
                }
```

7.1.3.248 KeyWord kw_80[1] [static]

Initial value:

```
{
                {"num_reliability_levels",13,0,1,0,0,0.,0.,0,N_mdm(num_resplevs,reliabilityLevels)}
                }
```

7.1.3.249 KeyWord kw_84[2] [static]

Initial value:

```
{
                {"num_offspring",0x19,0,2,0,0,0.,0.,0,N_mdm(pintz,numOffspring)},
                {"num_parents",0x19,0,1,0,0,0.,0.,0,N_mdm(pintz,numParents)}
                }
```

7.1.3.250 KeyWord kw_94[2] [static]

Initial value:

```
{
                {"shrinkage_fraction",10,0,1,0,0,0.,0.,0,N_mdm(Real01,shrinkagePercent)},
                {"shrinkage_percentage",2,0,1,0,0,0.,0.,-1,N_mdm(Real01,shrinkagePercent)}
                }
```

7.1.3.251 KeyWord kw_101[3] [static]

Initial value:

```
{
                {"gen_reliabilities",8,0,1,1,0,0.,0.,0,N_mdm(lit,responseLevelMappingType_gen_reliabilities)}
                {"probabilities",8,0,1,1,0,0.,0.,0,N_mdm(lit,responseLevelMappingType_probabilities)},
                {"reliabilities",8,0,1,1,0,0.,0.,0,N_mdm(lit,responseLevelMappingType_reliabilities)}
                }
```

7.1.3.252 KeyWord kw_102[2] [static]

Initial value:

```
{
                {"compute",8,3,2,0,kw_101},
                {"num_response_levels",13,0,1,0,0,0.,0.,0,N_mdm(num_resplevs,responseLevels)}
                }
```

7.1.3.253 KeyWord kw_104[2] [static]

Initial value:

```
{
                {"all_variables",8,0,1,0,0,0.,0.,0,N_mdm(true,allVarsFlag)},
                {"fixed_seed",8,0,2,0,0,0.,0.,0,N_mdm(true,fixedSeedFlag)}
                }
```

7.1.3.254 KeyWord kw_110[2] [static]

Initial value:

```
{
                {"nested",8,0,1,0,0,0.,0.,0,N_mdm(type,nestingOverride_NESTED)},
                {"non_nested",8,0,1,0,0,0.,0.,0,N_mdm(type,nestingOverride_NON_NESTED)}
                }
```

7.1.3.255 KeyWord kw_113[2] [static]

Initial value:

```
{
                {0,0,2,0,0,kw_110},
                {"dimension_preference",14,0,1,0,0,0.,0.,0,N_mdm(RealDL,sparseGridDimPref)}
                }
```

7.1.3.256 KeyWord kw_137[4] [static]

Initial value:

```
{
                {"converge_order",8,0,1,1,0,0.,0.,0,N_mdm(lit,subMethodName_converge_order)},
                {"converge_qoi",8,0,1,1,0,0.,0.,0,N_mdm(lit,subMethodName_converge_qoi)},
                {"estimate_order",8,0,1,1,0,0.,0.,0,N_mdm(lit,subMethodName_estimate_order)},
                {"refinement_rate",10,0,2,0,0,0.,0.,0,N_mdm(Real,refinementRate)}
                }
```

7.1.3.257 KeyWord kw_149[4] [static]

Initial value:

```
{
                {"adaptive_penalty_merit",8,0,1,1,0,0.,0.,0,N_mdm(slit,surrBasedLocalMeritFn_ADAPTIVE_PENALTY_MER
                {"augmented_lagrangian_merit",8,0,1,1,0,0.,0.,0,N_mdm(slit,surrBasedLocalMeritFn_AUGMENTED_LAGRAN
                {"lagrangian_merit",8,0,1,1,0,0.,0.,0,N_mdm(slit,surrBasedLocalMeritFn_LAGRANGIAN_MERIT)},
                {"penalty_merit",8,0,1,1,0,0.,0.,0,N_mdm(slit,surrBasedLocalMeritFn_PENALTY_MERIT)}
                }
```

7.1.3.258 KeyWord kw_176[5] [static]

Initial value:

```
{
                {"global",8,18,2,1,kw_170},
                {"hierarchical",8,3,2,1,kw_172,0.,0.,0,N_mom(lit,surrogateType_hierarchical)},
                {"id_surrogates",13,0,1,0,0,0.,0.,0,N_mom(intset,surrogateFnIndices)},
                {"local",8,1,2,1,kw_174,0.,0.,0,N_mom(lit,surrogateType_local_taylor)},
                {"multipoint",8,1,2,1,kw_175,0.,0.,0,N_mom(lit,surrogateType_multipoint_tana)}
                }
```

7.1.3.259 KeyWord kw_182[1] [static]

Initial value:

```
{
                {"damped",8,0,1,0,0,0.,0.,0,N_rem(lit,quasiHessianType_damped_bfgs)}
                }
```

7.1.3.260 KeyWord kw_209[8] [static]

Initial value:

```
{
                {"csv_descriptors",7,0,4,0,0,0.,0.,4,N_vam(strL,continuousStateLabels)},
                {"csv_initial_state",6,0,1,0,0,0.,0.,4,N_vam(RealLd,continuousStateVars)},
                {"csv_lower_bounds",6,0,2,0,0,0.,0.,4,N_vam(RealLd,continuousStateLowerBnds)},
                {"csv_upper_bounds",6,0,3,0,0,0.,0.,4,N_vam(RealLd,continuousStateUpperBnds)},
                {"descriptors",15,0,4,0,0,0.,0.,0,N_vam(strL,continuousStateLabels)},
                {"initial_state",14,0,1,0,0,0.,0.,0,N_vam(RealLd,continuousStateVars)},
                {"lower_bounds",14,0,2,0,0,0.,0.,0,N_vam(RealLd,continuousStateLowerBnds)},
                {"upper_bounds",14,0,3,0,0,0.,0.,0,N_vam(RealLd,continuousStateUpperBnds)}
                }
```

7.1.3.261 KeyWord kw_220[6] [static]

Initial value:

```
{
                {"alphas",14,0,1,1,0,0.,0.,0,N_vam(RealLb,gumbelUncAlphas)},
                {"betas",14,0,2,2,0,0.,0.,0,N_vam(RealLd,gumbelUncBetas)},
                {"descriptors",15,0,3,0,0,0.,0.,0,N_vae(caulbl,CAUVar_gumbel)},
                {"guuv_alphas",6,0,1,1,0,0.,0.,-3,N_vam(RealLb,gumbelUncAlphas)},
                {"guuv_betas",6,0,2,2,0,0.,0.,-3,N_vam(RealLd,gumbelUncBetas)},
                {"guuv_descriptors",7,0,3,0,0,0.,0.,-3,N_vae(caulbl,CAUVar_gumbel)}
                }
```

7.1.3.262 KeyWord kw_224[8] [static]

Initial value:

```
{
                {"descriptors",15,0,4,0,0,0.,0.,0,N_vae(ceulbl,CEUVar_interval)},
                {"interval_bounds",14,0,3,2,0,0.,0.,0,N_vam(vrl,Var_Info_Ivb)},
                {"interval_probs",14,0,2,1,0,0.,0.,0,N_vam(vrl,Var_Info_Ivp)},
                {"iuv_descriptors",7,0,4,0,0,0.,0.,-3,N_vae(ceulbl,CEUVar_interval)},
                {"iuv_interval_bounds",6,0,3,2,0,0.,0.,-3,N_vam(vrl,Var_Info_Ivb)},
                {"iuv_interval_probs",6,0,2,1,0,0.,0.,-3,N_vam(vrl,Var_Info_Ivp)},
                {"iuv_num_intervals",5,0,1,0,0,0.,0.,1,N_vam(vil,Var_Info_nIv)},
                {"num_intervals",13,0,1,0,0,0.,0.,0,N_vam(vil,Var_Info_nIv)}
                }
```

7.1.3.263 KeyWord kw_225[2] [static]

Initial value:

```
{
                {"lnuv_zetas",6,0,1,1,0,0.,0.,1,N_vam(RealLb,lognormalUncZetas)},
                {"zetas",14,0,1,1,0,0.,0.,0,N_vam(RealLb,lognormalUncZetas)}
                }
```

7.1.3.264 KeyWord kw_226[4] [static]

Initial value:

```
{
                {"error_factors",14,0,1,1,0,0.,0.,0,N_vam(RealLb,lognormalUncErrFacts)},
                {"lnuv_error_factors",6,0,1,1,0,0.,0.,-1,N_vam(RealLb,lognormalUncErrFacts)},
                {"lnuv_std_deviations",6,0,1,1,0,0.,0.,1,N_vam(RealLb,lognormalUncStdDevs)},
                {"std_deviations",14,0,1,1,0,0.,0.,0,N_vam(RealLb,lognormalUncStdDevs)}
                }
```

7.1.3.265 KeyWord kw_227[10] [static]

Initial value:

```
{
                {"descriptors",15,0,4,0,0,0.,0.,0,N_vae(caulbl,CAUVar_lognormal)},
                {"lambdas",14,2,1,1,kw_225,0.,0.,0,N_vam(RealLd,lognormalUncLambdas)},
                {"lnuv_descriptors",7,0,4,0,0,0.,0.,-2,N_vae(caulbl,CAUVar_lognormal)},
                {"lnuv_lambdas",6,2,1,1,kw_225,0.,0.,-2,N_vam(RealLd,lognormalUncLambdas)},
                {"lnuv_lower_bounds",6,0,2,0,0,0.,0.,3,N_vam(RealLb,lognormalUncLowerBnds)},
                {"lnuv_means",6,4,1,1,kw_226,0.,0.,3,N_vam(RealLb,lognormalUncMeans)},
                {"lnuv_upper_bounds",6,0,3,0,0,0.,0.,3,N_vam(RealUb,lognormalUncUpperBnds)},
                {"lower_bounds",14,0,2,0,0,0.,0.,0,N_vam(RealLb,lognormalUncLowerBnds)},
                {"means",14,4,1,1,kw_226,0.,0.,0,N_vam(RealLb,lognormalUncMeans)},
                {"upper_bounds",14,0,3,0,0,0.,0.,0,N_vam(RealUb,lognormalUncUpperBnds)}
                }
```

7.1.3.266 KeyWord kw_228[6] [static]

Initial value:

```
{
                {"descriptors",15,0,3,0,0,0.,0.,0,N_vae(caulbl,CAUVar_loguniform)},
                {"lower_bounds",14,0,1,1,0,0.,0.,0,N_vam(RealLb,loguniformUncLowerBnds)},
                {"luuv_descriptors",7,0,3,0,0,0.,0.,-2,N_vae(caulbl,CAUVar_loguniform)},
                {"luuv_lower_bounds",6,0,1,1,0,0.,0.,-2,N_vam(RealLb,loguniformUncLowerBnds)},
                {"luuv_upper_bounds",6,0,2,2,0,0.,0.,1,N_vam(RealUb,loguniformUncUpperBnds)},
                {"upper_bounds",14,0,2,2,0,0.,0.,0,N_vam(RealUb,loguniformUncUpperBnds)}
                }
```

7.1.3.267 KeyWord kw_229[3] [static]

Initial value:

```
{
                {"descriptors",15,0,3,0,0,0.,0.,0,N_vae(dailbl,DAUIVar_negative_binomial)},
                {"num_trials",13,0,2,2,0,0.,0.,0,N_vam(intDL,negBinomialUncNumTrials)},
                {"prob_per_trial",14,0,1,1,0,0.,0.,0,N_vam(RealLd,negBinomialUncProbPerTrial)}
                }
```

7.1.3.268 KeyWord kw_230[10] [static]

Initial value:

```
{
                {"descriptors",15,0,5,0,0,0.,0.,0,N_vae(caulbl,CAUVar_normal)},
                {"lower_bounds",14,0,3,0,0,0.,0.,0,N_vam(RealLd,normalUncLowerBnds)},
                {"means",14,0,1,1,0,0.,0.,0,N_vam(RealLd,normalUncMeans)},
                {"nuv_descriptors",7,0,5,0,0,0.,0.,-3,N_vae(caulbl,CAUVar_normal)},
                {"nuv_lower_bounds",6,0,3,0,0,0.,0.,-3,N_vam(RealLd,normalUncLowerBnds)},
                {"nuv_means",6,0,1,1,0,0.,0.,-3,N_vam(RealLd,normalUncMeans)},
                {"nuv_std_deviations",6,0,2,2,0,0.,0.,2,N_vam(RealLb,normalUncStdDevs)},
                {"nuv_upper_bounds",6,0,4,0,0,0.,0.,2,N_vam(RealLd,normalUncUpperBnds)},
                {"std_deviations",14,0,2,2,0,0.,0.,0,N_vam(RealLb,normalUncStdDevs)},
                {"upper_bounds",14,0,4,0,0,0.,0.,0,N_vam(RealLd,normalUncUpperBnds)}
                }
```

7.1.3.269 KeyWord kw_231[2] [static]

Initial value:

```
{
                {"descriptors",15,0,2,0,0,0.,0.,0,N_vae(dailbl,DAUIVar_poisson)},
                {"lambdas",14,0,1,1,0,0.,0.,0,N_vam(RealLd,poissonUncLambdas)}
                }
```

7.1.3.270 KeyWord kw_232[8] [static]

Initial value:

```
{
                {"descriptors",15,0,4,0,0,0.,0.,0,N_vae(caulbl,CAUVar_triangular)},
                {"lower_bounds",14,0,2,2,0,0.,0.,0,N_vam(RealLb,triangularUncLowerBnds)},
                {"modes",14,0,1,1,0,0.,0.,0,N_vam(RealLd,triangularUncModes)},
                {"tuv_descriptors",7,0,4,0,0,0.,0.,-3,N_vae(caulbl,CAUVar_triangular)},
                {"tuv_lower_bounds",6,0,2,2,0,0.,0.,-3,N_vam(RealLb,triangularUncLowerBnds)},
                {"tuv_modes",6,0,1,1,0,0.,0.,-3,N_vam(RealLd,triangularUncModes)},
                {"tuv_upper_bounds",6,0,3,3,0,0.,0.,1,N_vam(RealUb,triangularUncUpperBnds)},
                {"upper_bounds",14,0,3,3,0,0.,0.,0,N_vam(RealUb,triangularUncUpperBnds)}
                }
```

7.1.3.271 KeyWord kw_233[6] [static]

Initial value:

```
{
                {"descriptors",15,0,3,0,0,0.,0.,0,N_vae(caulbl,CAUVar_uniform)},
                {"lower_bounds",14,0,1,1,0,0.,0.,0,N_vam(RealLb,uniformUncLowerBnds)},
                {"upper_bounds",14,0,2,2,0,0.,0.,0,N_vam(RealUb,uniformUncUpperBnds)},
                {"uuv_descriptors",7,0,3,0,0,0.,0.,-3,N_vae(caulbl,CAUVar_uniform)},
                {"uuv_lower_bounds",6,0,1,1,0,0.,0.,-3,N_vam(RealLb,uniformUncLowerBnds)},
                {"uuv_upper_bounds",6,0,2,2,0,0.,0.,-3,N_vam(RealUb,uniformUncUpperBnds)}
                }
```

7.1.3.272 KeyWord kw_234[6] [static]

Initial value:

```
{
                {"alphas",14,0,1,1,0,0.,0.,0,N_vam(RealLb,weibullUncAlphas)},
                {"betas",14,0,2,2,0,0.,0.,0,N_vam(RealLb,weibullUncBetas)},
                {"descriptors",15,0,3,0,0,0.,0.,0,N_vae(caulbl,CAUVar_weibull)},
                {"wuv_alphas",6,0,1,1,0,0.,0.,-3,N_vam(RealLb,weibullUncAlphas)},
                {"wuv_betas",6,0,2,2,0,0.,0.,-3,N_vam(RealLb,weibullUncBetas)},
                {"wuv_descriptors",7,0,3,0,0,0.,0.,-3,N_vae(caulbl,CAUVar_weibull)}
                }
```

7.1.3.273 KeyWord kw_236[6] [static]

Initial value:

```
{
                {"interface",0x308,10,5,5,kw_9,0.,0.,0,N_ifm3(start,0,stop)},
                {"method",0x308,75,2,2,kw_153,0.,0.,0,N_mdm3(start,0,stop)},
                {"model",8,6,3,3,kw_177,0.,0.,0,N_mom3(start,0,stop)},
                {"responses",0x308,15,6,6,kw_194,0.,0.,0,N_rem3(start,0,stop)},
                {"strategy",0x108,10,1,1,kw_205,0.,0.,0,NIDRProblemDescDB::strategy_start},
                {"variables",0x308,29,4,4,kw_235,0.,0.,0,N_vam3(start,0,stop)}
                }
```

7.1.3.274 Var_uinfo CAUVLbl[CAUVar_Nkinds] [static]

Initial value:

```
{
        UncInfo(nuv_, Normal),
        UncInfo(lnuv_, Lognormal),
        UncInfo(uuv_, Uniform),
        UncInfo(luuv_, Loguniform),
        UncInfo(tuv_, Triangular),
        UncInfo(euv_, Exponential),
        UncInfo(beuv_, Beta),
        UncInfo(gauv_, Gamma),
        UncInfo(guuv_, Gumbel),
        UncInfo(fuv_, Frechet),
        UncInfo(wuv_, Weibull),
        UncInfo(hbuv_, HistogramBin)
        }
```

7.1.3.275 Var_uinfo DAUIVLbl[DAUIVar_Nkinds] [static]

Initial value:

```
{
        UncInfo(puv_, Poisson),
        UncInfo(biuv_, Binomial),
        UncInfo(nbuv_, NegBinomial),
        UncInfo(geuv_, Geometric),
        UncInfo(hguv_, HyperGeom)
        }
```

7.1.3.276 Var_uinfo DAURVLbl[DAURVar_Nkinds] [static]

Initial value:

```
{
        UncInfo(hpuv_, HistogramPt)
        }
```

7.1.3.277 Var_uinfo CEUVLbl[CEUVar_Nkinds] [static]

Initial value:

```
{
        UncInfo(iuv_, Interval)
        }
```

7.1.3.278 Var_uinfo DiscSetLbl[DiscSetVar_Nkinds] [static]

Initial value:

```
{
       DiscSetInfo(ddsiv_, DesSetInt),
       DiscSetInfo(ddsrv_, DesSetReal),
       DiscSetInfo(dssiv_, StateSetInt),
       DiscSetInfo(dssrv_, StateSetReal)
       }
```

7.1.3.279 VarLabelChk Vlch[ ] [static]

Initial value:

```
{
        { AVI numContinuousDesVars, AVI continuousDesignLabels, "cdv_", "cdv_descriptors" },
        { AVI numDiscreteDesRangeVars, AVI discreteDesignRangeLabels, "ddriv_", "ddriv_descriptors" },
        { AVI numDiscreteDesSetIntVars, AVI discreteDesignSetIntLabels, "ddsiv_", "ddsiv_descriptors" },
        { AVI numDiscreteDesSetRealVars, AVI discreteDesignSetRealLabels, "ddsrv_", "ddsrv_descriptors" },
        { AVI numContinuousStateVars, AVI continuousStateLabels, "csv_", "csv_descriptors" },
        { AVI numDiscreteStateRangeVars, AVI discreteStateRangeLabels, "dsriv_", "dsriv_descriptors" },
        { AVI numDiscreteStateSetIntVars, AVI discreteStateSetIntLabels, "dssiv_", "dssiv_descriptors" },
        { AVI numDiscreteStateSetRealVars, AVI discreteStateSetRealLabels, "dssrv_", "dssrv_descriptors" },
        { AVI numContinuousDesVars, AVI continuousDesignScaleTypes, 0, "cdv_scale_types" }
        }
```

7.1.3.280 VLstuff VLS[N_VLS] [static]

Initial value:

```
{
{CAUVar_Nkinds,  1, AVI CAUv,  CAUVLbl,
       DVR continuousAleatoryUncLabels,
       DVR continuousAleatoryUncLowerBnds,
       DVR continuousAleatoryUncUpperBnds,
       DVR continuousAleatoryUncVars},
{CEUVar_Nkinds,  1, AVI CEUv,  CEUVLbl,
       DVR continuousEpistemicUncLabels,
       DVR continuousEpistemicUncLowerBnds,
       DVR continuousEpistemicUncUpperBnds,
       DVR continuousEpistemicUncVars},
{DAUIVar_Nkinds, 0, AVI DAUIv, DAUIVLbl,
       DVR  discreteIntAleatoryUncLabels,
       RDVR discreteIntAleatoryUncLowerBnds,
       RDVR discreteIntAleatoryUncUpperBnds,
       RDVR discreteIntAleatoryUncVars},
{DAURVar_Nkinds, 1, AVI DAURv, DAURVLbl,
       DVR discreteRealAleatoryUncLabels,
       DVR discreteRealAleatoryUncLowerBnds,
       DVR discreteRealAleatoryUncUpperBnds,
       DVR discreteRealAleatoryUncVars}}
```

7.1.3.281 Var_bgen var_mp_bgen[ ] [static]

Initial value:

```
{
                Vchu0(gamma_uncertain,numGammaUncVars,Gamma),
                Vchu0(gumbel_uncertain,numGumbelUncVars,Gumbel),
                Vchu0(frechet_uncertain,numFrechetUncVars,Frechet),
                Vchu0(weibull_uncertain,numWeibullUncVars,Weibull),
                Vchu0(histogram_bin_uncertain,numHistogramBinUncVars,HistogramBin)
                }
```

7.1.3.282 Var_bgen var_mp_bgen_audr[ ] [static]

Initial value:

```
{
                Vchu0(histogram_point_uncertain,numHistogramPtUncVars,HistogramPt)
                }
```

7.1.3.283 Var_bgen var_mp_bgen_audi[ ] [static]

Initial value:

```
{
                Vchu0(poisson_uncertain,numPoissonUncVars,Poisson),
                Vchu0(binomial_uncertain,numBinomialUncVars,Binomial),
                Vchu0(negative_binomial_uncertain,numNegBinomialUncVars,NegBinomial),
                Vchu0(geometric_uncertain,numGeometricUncVars,Geometric),
                Vchu0(hypergeometric_uncertain,numHyperGeomUncVars,HyperGeom)
                }
```

7.1.3.284 Var_bgen var_mp_bgen_eu[ ] [static]

Initial value:

```
{
                Vchu0(interval_uncertain,numIntervalUncVars,Interval)
                }
```

7.1.3.285 Var_bgen var_mp_bgen_dis[ ] [static]

Initial value:

```
{
                Vchu0(discrete_design_set_integer,numDiscreteDesSetIntVars,DDSI),
                Vchu0(discrete_design_set_real,numDiscreteDesSetRealVars,DDSR),
                Vchu0(discrete_state_set_integer,numDiscreteStateSetIntVars,DSSI),
                Vchu0(discrete_state_set_real,numDiscreteStateSetRealVars,DSSR)
                }
```

7.1.3.286 VarBgen Bgen[ ] [static]

Initial value:

```
{
        BgenInit(var_mp_bgen_audr),
        BgenInit(var_mp_bgen_audi),
        BgenInit(var_mp_bgen_eu)}
```

7.1.3.287 Var_bchk var_mp_bndchk[ ] [static]

Initial value:

```
{
        Vchv(continuous_design,numContinuousDesVars,continuousDesign),
        Vchu1(normal_uncertain,numNormalUncVars,normalUnc),
        Vchu1(lognormal_uncertain,numLognormalUncVars,lognormalUnc),
        Vchu(uniform_uncertain,numUniformUncVars,uniformUnc),
        Vchu(loguniform_uncertain,numLoguniformUncVars,loguniformUnc),
        Vchu(triangular_uncertain,numTriangularUncVars,triangularUnc),
        Vchu0(exponential_uncertain,numExponentialUncVars,Exponential),
        Vchu(beta_uncertain,numBetaUncVars,betaUnc),
        Vchv(continuous_state,numContinuousStateVars,continuousState)
        }
```

7.1.3.288 Var_ibchk var_mp_ibndchk[ ] [static]

Initial value:

```
{
        Vchi(discrete_design_range,numDiscreteDesRangeVars,discreteDesignRange),
        Vchi(discrete_state_range,numDiscreteStateRangeVars,discreteStateRange)
        }
```

7.2 SIM Namespace Reference

plug facilities into DAKOTA.

Classes

- class ParallelDirectApplicInterface

  plug-ins using assign_rep().

- class SerialDirectApplicInterface

  plug-ins using assign_rep().

7.2.1 Detailed Description

plug facilities into DAKOTA.

A typical use of plug-ins with assign_rep() is to publish a simulation interface for use in library mode See Interfacing with DAKOTA as a Library for more information.

Chapter 8

DAKOTA Class Documentation

8.1 ActiveSet Class Reference

active set request vector and the derivative variables vector.

Public Member Functions

- ActiveSet ()
  default constructor
- ActiveSet (size_t num_fns, size_t num_deriv_vars)
  standard constructor
- ActiveSet (const ActiveSet &set)
  copy constructor
- ~ActiveSet ()
  destructor
- ActiveSet & operator= (const ActiveSet &set)
  assignment operator
- void reshape (size_t num_fns, size_t num_deriv_vars)
  reshape requestVector and derivVarsVector
- const ShortArray & request_vector () const
  return the request vector
- void request_vector (const ShortArray &rv)
  set the request vector

- void request_values (const short rv_val)
  set all request vector values
- void request_value (const size_t index, const short rv_val)
  set the value of an entry in the request vector
- const SizetArray & derivative_vector () const
  return the derivative variables vector
- void derivative_vector (const SizetArray &dvv)
  set the derivative variables vector from a SizetArray
- void derivative_vector (SizetMultiArrayConstView dvv)
  set the derivative variables vector from a SizetMultiArrayConstView
- void derivative_start_value (size_t dvv_start_val)
  set the derivative variables vector values
- void read (std::istream &s)
  read an active set object from an std::istream
- void write (std::ostream &s) const
  write an active set object to an std::ostream
- void write_annotated (std::ostream &s) const
  write an active set object to an std::ostream in annotated format
- void read (BiStream &s)
  read an active set object from the binary restart stream
- void write (BoStream &s) const
  write an active set object to the binary restart stream
- void read (MPIUnpackBuffer &s)
  read an active set object from a packed MPI buffer
- void write (MPIPackBuffer &s) const
  write an active set object to a packed MPI buffer

Private Attributes

- ShortArray requestVector
  the vector of response requests
- SizetArray derivVarsVector
  the vector of variable ids used for computing derivatives

Friends

- bool operator== (const ActiveSet &set1, const ActiveSet &set2)

  equality operator

- bool operator!= (const ActiveSet &set1, const ActiveSet &set2)

  inequality operator

8.1.1 Detailed Description

active set request vector and the derivative variables vector.

The ActiveSet class is a small class whose initial design function is to avoid having to pass the ASV and DVV separately. It is not part of a class hierarchy and does not employ reference-counting/ representation-sharing idioms (e.g., handle-body).

8.1.2 Member Data Documentation

8.1.2.1 ShortArray requestVector [private]

the vector of response requests

It uses a 0 value for inactive functions and sums 1 (value), 2 (gradient), and 4 (Hessian) for active functions.

8.1.2.2 SizetArray derivVarsVector [private]

the vector of variable ids used for computing derivatives

These ids will generally identify either the active continuous variables or the inactive continuous variables.

The documentation for this class was generated from the following files:

- DakotaActiveSet.H
- DakotaActiveSet.C

8.2 AnalysisCode Class Reference

processes for managing simulations.

Inheritance diagram for AnalysisCode::



Public Member Functions

- void define_filenames (const int id)

  file and tagging options

- void write_parameters_files (const Variables &vars, const ActiveSet &set, const Response &response, const int id)

  write_parameters_file()) in either standard or aprepro format

- void read_results_files (Response &response, const int id)

  read the response object from one or more results files

- const std::vector< String > & program_names () const

  return programNames

- const std::string & input_filter_name () const

  return iFilterName

- const std::string & output_filter_name () const

  return oFilterName

- const std::string & parameters_filename () const

  return paramsFileName

- const std::string & results_filename () const

  return resultsFileName

- const std::string & results_filename (const int id)

  return the results filename entry in fileNameMap corresponding to id

- void suppress_output_flag (const bool flag)

  set suppressOutputFlag

- bool suppress_output_flag () const

return suppressOutputFlag

- bool command_line_arguments () const

  return commandLineArgs

- bool multiple_parameters_filenames () const

  return multipleParamsFiles

- void file_cleanup () const

  remove temporary files if not fileSaveFlag

Protected Member Functions

- AnalysisCode (const ProblemDescDB &problem_db)

  constructor

- ~AnalysisCode ()

  destructor

- const char * work_dir () const

  return Workdir if useWorkdir is true (only called by derived classes)

Protected Attributes

- bool suppressOutputFlag

  flag set by master processor to suppress output from slave processors

- short outputLevel

  output verbosity level: {SILENT,QUIET,NORMAL,VERBOSE,DEBUG}_OUTPUT

- bool fileTagFlag

  flags tagging of parameter/results files

- bool fileSaveFlag

  flags retention of parameter/results files

- bool commandLineArgs

  the analysis drivers and input/output filters

- bool apreproFlag

  format for parameter files

- bool multipleParamsFiles

analysis drivers

- std::string iFilterName

  the name of the input filter (input_filter user specification)

- std::string oFilterName

  the name of the output filter (output_filter user specification)

- std::vector< String > programNames

  specification)

- size_t numPrograms

  the number of analysis code programs (length of programNames)

- std::string specifiedParamsFileName

  the name of the parameters file from user specification

- std::string paramsFileName

  temp files)

- std::string specifiedResultsFileName

  the name of the results file from user specification

- std::string resultsFileName

  the results file name actually used (modified with tagging or temp files)

- bool allowExistingResults

  and only fork if needed

- std::string curWorkdir

  working directory when useWorkdir is true

- std::map< int, std::pair< std::string, std::string > > fileNameMap

  evaluations. Map key is the function evaluation identifier.

- bool useWorkdir

  whether to use a new or specified work_directory

- std::string workDir

  its name, if specified...

- bool dirTag

  whether to tag the working directory

- bool dirSave

  whether dir_save was specified

- bool dirDel

  whether to delete the directory when Dakota terminates

- std::string templateDir

  template directory (if specified)

- StringArray templateFiles

  template files (if specified)

- bool templateCopy

  whether to force a copy (versus link) every time

- bool templateReplace

  whether to replace existing files

- bool haveTemplateDir

  state variable for template directory

- bool haveWorkdir

  for dirTag, whether we have workDir

- std::string dakDir

  Dakota directory (if needed).

Private Member Functions

- void write_parameters_file (const Variables &vars, const ActiveSet &set, const Response &response, const std::string &prog, const std::vector< String > &an_comps, const std::string &params_fname)

  standard or aprepro format

Private Attributes

- ParallelLibrary & parallelLib

  reference to the ParallelLibrary object. Used in define_filenames().

- String2DArray analysisComponents

  (from the analysis_components interface specification)

8.2.1 Detailed Description

processes for managing simulations.

The AnalysisCode class hierarchy provides simulation spawning services for ApplicationInterface derived classes and alleviates these classes of some of the specifics of simulation code management. The hierarchy does not employ the letter-envelope technique since the ApplicationInterface derived classes instantiate the appropriate derived AnalysisCode class directly.

The documentation for this class was generated from the following files:

- AnalysisCode.H
- AnalysisCode.C

8.3 Analyzer Class Reference

hierarchy.

Inheritance diagram for Analyzer::

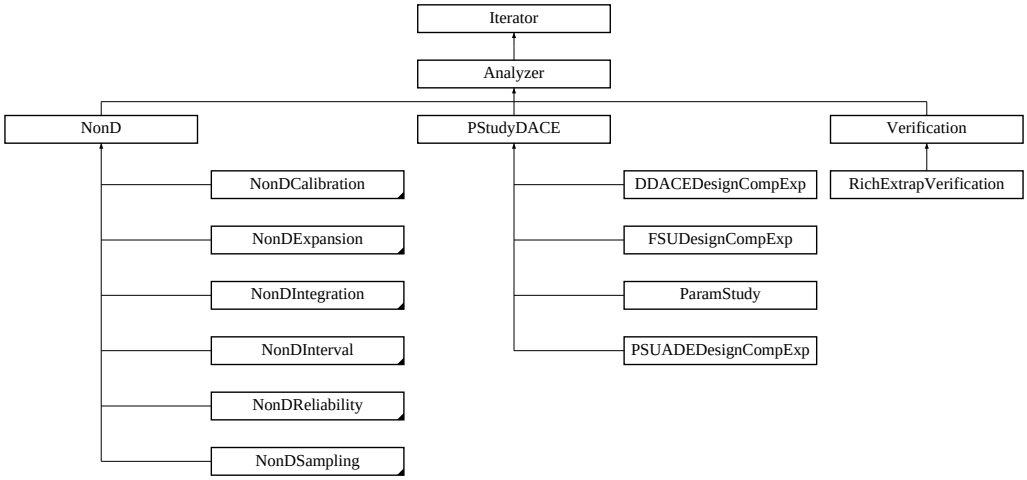

Public Member Functions

- const VariablesArray & all_variables ()

  return the complete set of evaluated variables

- const RealMatrix & all_samples ()

  return the complete set of evaluated samples

- const ResponseArray & all_responses () const

  return the complete set of computed responses

Protected Member Functions

- Analyzer ()

  default constructor

- Analyzer (Model &model)

  standard constructor

- Analyzer (NoDBBaseConstructor, Model &model)

  alternate constructor for instantiations "on the fly" with a Model

- Analyzer (NoDBBaseConstructor)

alternate constructor for instantiations "on the fly" without a Model

- ~Analyzer ()

  destructor

- virtual void vary_pattern (bool pattern_flag)

  sets varyPattern in derived classes that support it

- virtual void get_parameter_sets (Model &model)

  Returns one block of samples (ndim ∗ num_samples).

- virtual void update_model_from_sample (Model &model, const Real ∗sample_vars)

  update model's current variables with data from sample

- virtual void update_model_from_variables (Model &model, const Variables &vars)

  update model's current variables with data from vars

- void pre_output ()

  convenience function to write variables to file, following pre-run

- void print_results (std::ostream &s)

  print the final iterator results

- const Variables & variables_results () const

  return a single final iterator solution (variables)

- const Response & response_results () const

  return a single final iterator solution (response)

- const VariablesArray & variables_array_results ()

  only be used if returns_multiple_points() returns true.

- const ResponseArray & response_array_results ()

  only be used if returns_multiple_points() returns true.

- void response_results_active_set (const ActiveSet &set)

  set the requested data for the final iterator response results

- bool compact_mode () const

  returns Analyzer::compactMode

- bool returns_multiple_points () const

  return is false. Override to return true if appropriate.

- void evaluate_parameter_sets (Model &model, bool log_resp_flag, bool log_best_flag)

  into response sets (allResponses)

- void variance_based_decomp (int ncont, int ndiscint, int ndiscreal, int num_samples)
- void read_variables_responses (int num_evals, size_t num_vars)

  read num_evals variables/responses from file

- void print_sobol_indices (std::ostream &s) const

  Printing of VBD results.

- void sample_to_variables (const Real *sample_c_vars, Variables &vars)

  convert samples array to variables array; e.g., allSamples to allVariables

- void samples_to_variables_array (const RealMatrix &sample_matrix, VariablesArray &vars_array)

  convert samples array to variables array; e.g., allSamples to allVariables

- void variables_array_to_samples (const VariablesArray &vars_array, RealMatrix &sample_matrix)

  convert variables array to samples array; e.g., allVariables to allSamples

Protected Attributes

- bool compactMode

  switch for allSamples (compact mode) instead of allVariables (normal mode)

- VariablesArray allVariables

  array of all variables to be evaluated in evaluate_parameter_sets()

- RealMatrix allSamples

  compact alternative to allVariables

- ResponseArray allResponses

  array of all responses to be computed in evaluate_parameter_sets()

- StringArray allHeaders

  array of headers to insert into output while evaluating allVariables

- size_t numObjFns

  number of objective functions

- size_t numLSqTerms

  number of least squares terms

- RealPairPRPMultiMap bestVarsRespMap

  map which stores best set of solutions

Private Member Functions

- void compute_best_metrics (const Response &response, std::pair< Real, Real > &metrics)

  compares current evaluation to best evaluation and updates best

- void update_best (const Variables &vars, int eval_id, const Response &response)

  compares current evaluation to best evaluation and updates best

- void update_best (const Real *sample_c_vars, int eval_id, const Response &response)

  compares current evaluation to best evaluation and updates best

Private Attributes

- Real vbdDropTol

  tolerance for omitting output of small VBD indices

- RealVectorArray S4

  VBD main effect indices.

- RealVectorArray T4

  VBD total effect indices.

8.3.1 Detailed Description

hierarchy.

The Analyzer class provides common data and functionality for various types of systems analysis, including nondeterministic analysis, design of experiments, and parameter studies.

8.3.2 Member Function Documentation

8.3.2.1 void print_results (std::ostream & *s*) `[protected, virtual]`

print the final iterator results

This virtual function provides additional iterator-specific final results outputs beyond the function evaluation summary printed in finalize_run().

Reimplemented from Iterator.

Reimplemented in PStudyDACE, Verification, NonDExpansion, NonDGlobalReliability, NonDGPMSABayesCalibration, NonDIncremLHSSampling, NonDInterval, NonDLHSSampling, NonDLocalReliability, and RichExtrapVerification.

8.3.2.2 void evaluate_parameter_sets (Model & *model*, bool *log_resp_flag*, bool *log_best_flag*) [protected]

into response sets (allResponses)

Convenience function for derived classes with sets of function evaluations to perform (e.g., NonDSampling, DDACEDesignCompExp, FSUDesignCompExp, ParamStudy).

8.3.2.3 void variance_based_decomp (int *ncont*, int *ndiscint*, int *ndiscreal*, int *num_samples*) [protected]

Calculation of sensitivity indices obtained by variance based decomposition. These indices are obtained by the Saltelli version of the Sobol VBD which uses (K+2)∗N function evaluations, where K is the number of dimensions (uncertain vars) and N is the number of samples.

8.3.2.4 void print_sobol_indices (std::ostream & *s*) const [protected]

Printing of VBD results.

printing of variance based decomposition indices.

The documentation for this class was generated from the following files:

- DakotaAnalyzer.H
- DakotaAnalyzer.C

8.4 ApplicationInterface Class Reference

interfaces to simulation codes.

Inheritance diagram for ApplicationInterface::

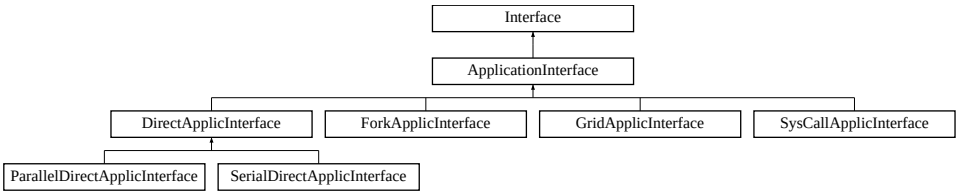

Public Member Functions

- ApplicationInterface (const ProblemDescDB &problem_db)

  constructor

- ~ApplicationInterface ()

  destructor

Protected Member Functions

- void init_communicators (const IntArray &message_lengths, const int &max_iterator_concurrency)

  iterator and concurrent multiprocessor analyses within an evaluation.

- void set_communicators (const IntArray &message_lengths)

  (the partitions are already allocated in ParallelLibrary).

- void free_communicators ()

  iterator and concurrent multiprocessor analyses within an evaluation.

- void init_serial ()
- int asynch_local_evaluation_concurrency () const

  return asynchLocalEvalConcurrency

- String interface_synchronization () const

  return interfaceSynchronization

- void map (const Variables &vars, const ActiveSet &set, Response &response, const bool asynch_flag=false)

  Protected due to Interface letter-envelope idiom.

- void manage_failure (const Variables &vars, const ActiveSet &set, Response &response, int failed_eval_id)

manages a simulation failure using abort/retry/recover/continuation

- const IntResponseMap & synch ()

  beforeSynchCorePRPQueue and returns all jobs

- const IntResponseMap & synch_nowait ()

  beforeSynchCorePRPQueue and returns a partial set of completed jobs

- void serve_evaluations ()

  run on evaluation servers to serve the iterator master

- void stop_evaluation_servers ()

  used by the iterator master to terminate evaluation servers

- virtual void derived_map (const Variables &vars, const ActiveSet &set, Response &response, int fn_eval_id)

  that is specific to a derived class.

- virtual void derived_map_asynch (const ParamResponsePair &pair)

  asynchronous evaluation that is specific to a derived class.

- virtual void derived_synch (PRPQueue &prp_queue)

  classes. This version waits for at least one completion.

- virtual void derived_synch_nowait (PRPQueue &prp_queue)

  any completions if none are immediately available.

- void self_schedule_analyses ()

  evaluation using message passing

- void serve_analyses_synch ()

  analysis job at a time

- virtual int derived_synchronous_local_analysis (const int &analysis_id)

  ApplicationInterface::serve_analyses_synch().

Protected Attributes

- ParallelLibrary & parallelLib

  the concurrent evaluations and concurrent analyses parallelism levels

- bool suppressOutput

  flag for suppressing output on slave processors

- int evalCommSize

size of evalComm

- int evalCommRank

  processor rank within evalComm

- int evalServerId

  evaluation server identifier

- bool eaDedMasterFlag

  flag for dedicated master partitioning at ea level

- int analysisCommSize

  size of analysisComm

- int analysisCommRank

  processor rank within analysisComm

- int analysisServerId

  analysis server identifier

- int numAnalysisServers

  number of analysis servers

- bool multiProcAnalysisFlag

  flag for multiprocessor analysis partitions

- bool asynchLocalAnalysisFlag

  flag for asynchronous local parallelism of analyses

- int asynchLocalAnalysisConcurrency

  scheduling and specifies hybrid concurrency when message passing

- int numAnalysisDrivers

  (from the analysis_drivers interface specification)

- IntSet completionSet

  and derived_synch_nowait()

Private Member Functions

- bool duplication_detect (const Variables &vars, Response &response, const bool asynch_flag)

  evaluation request has already been performed or queued

- void self_schedule_evaluations ()

  using message passing; executes on iteratorComm master

- void static_schedule_evaluations ()
  using message passing; executes on iteratorComm master
- void asynchronous_local_evaluations (PRPQueue &prp_queue)
  the local processor
- void asynchronous_local_evaluations_static (PRPQueue &prp_queue)
  asynchLocalEvalConcurrency
- void synchronous_local_evaluations (PRPQueue &prp_queue)
  the local processor
- void asynchronous_local_evaluations_nowait (PRPQueue &prp_queue)
  static-scheduling cases)
- void serve_evaluations_synch ()
  one synchronous evaluation at a time
- void serve_evaluations_asynch ()
  multiple asynchronous evaluations
- void serve_evaluations_peer ()
  one synchronous evaluation at a time as part of the 1st peer
- void set_evaluation_communicators (const IntArray &message_lengths)
  following ParallelLibrary::init_evaluation_communicators().
- void set_analysis_communicators ()
  following ParallelLibrary::init_analysis_communicators().
- void check_configuration (const int &max_iterator_concurrency)
  perform some error checks on the parallel configuration
- const ParamResponsePair & get_source_pair (const Variables &target_vars)
  evaluation to the failed "target"
- void continuation (const Variables &target_vars, const ActiveSet &set, Response &response, const ParamResponsePair &source_pair, int failed_eval_id)
  Invoked by manage_failure() for failAction == "continuation".
- void common_input_filtering (const Variables &vars)
  common input filtering operations, e.g. mesh movement
- void common_output_filtering (Response &response)
  common output filtering operations, e.g. data filtering

Private Attributes

- int worldSize

  size of MPI_COMM_WORLD

- int worldRank

  processor rank within MPI_COMM_WORLD

- int iteratorCommSize

  size of iteratorComm

- int iteratorCommRank

  processor rank within iteratorComm

- bool ieMessagePass

  flag for message passing at ie scheduling level

- int numEvalServers

  number of evaluation servers

- bool eaMessagePass

  flag for message passing at ea scheduling level

- int procsPerAnalysis

  processors per analysis servers

- int lenVarsMessage

  computed in Model::init_communicators()

- int lenVarsActSetMessage

  ActiveSet object; computed in Model::init_communicators().

- int lenResponseMessage

  computed in Model::init_communicators()

- int lenPRPairMessage

  computed in Model::init_communicators()

- String evalScheduling

  auto-configure logic in ParallelLibrary::resolve_inputs().

- String analysisScheduling

  auto-configure logic in ParallelLibrary::resolve_inputs().

- int asynchLocalEvalConcurrency

  scheduling and specifies hybrid concurrency when message passing

- bool asynchLocalEvalStatic

  with a static schedule (default false)

- IntArray localServerJobMap

  asynchronour local static schedules)

- String interfaceSynchronization

  or asynchronous

- bool headerFlag

  function may be called many times prior to any completions)

- bool asvControlFlag

  on each evaluation.

- bool evalCacheFlag

  cache (i.e., queries and insertions using the data_pairs cache).

- bool restartFileFlag

  insertions into write_restart).

- ShortArray defaultASV

  the static ASV values used when the user has selected asvControl = off

- String failAction

  retry, recover, or continuation

- int failRetryLimit

  limit on the number of retries for the retry failAction

- RealVector failRecoveryFnVals

  the dummy function values used for the recover failAction

- IntResponseMap historyDuplicateMap

  evaluations. Map key is fnEvalId, map value is corresponding response.

- std::map< int, std::pair< PRPQueueHIter, Response > > beforeSynchDuplicateMap

  beforeSynchCorePRPQueue evaluations

- PRPQueue beforeSynchCorePRPQueue

  that is later scheduled in synch() or synch_nowait().

- PRPQueue beforeSynchAlgPRPQueue

  that is later evaluated in synch() or synch_nowait().

- IntSet runningSet

  used by asynchronous_local_nowait to bookkeep which jobs are running

8.4.1 Detailed Description

interfaces to simulation codes.

ApplicationInterface provides an interface class for performing parameter to response mappings using simulation code(s). It provides common functionality for a number of derived classes and contains the majority of all of the scheduling algorithms in DAKOTA. The derived classes provide the specifics for managing code invocations using system calls, forks, direct procedure calls, or distributed resource facilities.

8.4.2 Member Function Documentation

8.4.2.1 void init_serial () `[inline, protected, virtual]`

DataInterface.C defaults of 0 servers are needed to distinguish an explicit user request for 1 server (serialization of a parallelism level) from no user request (use parallel auto-config). This default causes problems when init_communicators() is not called for an interface object (e.g., static scheduling fails in DirectApplicInterface::derived_map() for NestedModel::optionalInterface). This is the reason for this function: to reset certain defaults for interface objects that are used serially.

Reimplemented from Interface.

8.4.2.2 void map (const Variables & *vars*, const ActiveSet & *set*, Response & *response*, const bool *asynch_flag* = `false`) `[protected, virtual]`

Protected due to Interface letter-envelope idiom.

The function evaluator for application interfaces. Called from derived_compute_response() and derived_asynch_compute_response() in derived Model classes. If asynch_flag is not set, perform a blocking evaluation (using derived_map()). If asynch_flag is set, add the job to the beforeSynchCorePRPQueue queue for execution by one of the scheduler routines in synch() or synch_nowait(). Duplicate function evaluations are detected with duplication_detect().

Reimplemented from Interface.

8.4.2.3 const IntResponseMap & synch () `[protected, virtual]`

beforeSynchCorePRPQueue and returns all jobs

This function provides blocking synchronization for all cases of asynchronous evaluations, including the local asynchronous case (background system call, nonblocking fork, & multithreads), the message passing case, and the hybrid case. Called from derived_synchronize() in derived Model classes.

Reimplemented from Interface.

8.4.2.4 const IntResponseMap & synch_nowait () [protected, virtual]

beforeSynchCorePRPQueue and returns a partial set of completed jobs

This function will eventually provide nonblocking synchronization for all cases of asynchronous evaluations, however it currently supports only the local asynchronous case since nonblocking message passing schedulers have not yet been implemented. Called from derived_synchronize_nowait() in derived Model classes.

Reimplemented from Interface.

8.4.2.5 void serve_evaluations () [protected, virtual]

run on evaluation servers to serve the iterator master

Invoked by the serve() function in derived Model classes. Passes control to serve_evaluations_asynch(), serve_evaluations_peer(), or serve_evaluations_synch() according to specified concurrency and self/static scheduler configuration.

Reimplemented from Interface.

8.4.2.6 void stop_evaluation_servers () [protected, virtual]

used by the iterator master to terminate evaluation servers

This code is executed on the iteratorComm rank 0 processor when iteration on a particular model is complete. It sends a termination signal (tag = 0 instead of a valid fn_eval_id) to each of the slave analysis servers. NOTE: This function is called from the Strategy layer even when in serial mode. Therefore, use iteratorCommSize to provide appropriate fall through behavior.

Reimplemented from Interface.

8.4.2.7 void self_schedule_analyses () [protected]

evaluation using message passing

This code is called from derived classes to provide the master portion of a master-slave algorithm for the dynamic self-scheduling of analyses among slave servers. It is patterned after self_schedule_evaluations(). It performs no analyses locally and matches either serve_analyses_synch() or serve_analyses_asynch() on the slave servers, depending on the value of asynchLocalAnalysisConcurrency. Self-scheduling approach assigns jobs in 2 passes. The 1st pass gives each server the same number of jobs (equal to asynchLocalAnalysisConcurrency). The 2nd pass assigns the remaining jobs to slave servers as previous jobs are completed. Single- and multilevel parallel use intra- and inter-communicators, respectively, for send/receive. Specific syntax is encapsulated within ParallelLibrary.

8.4.2.8 void serve_analyses_synch () [protected]

analysis job at a time

This code is called from derived classes to run synchronous analyses on slave processors. The slaves receive requests (blocking receive), do local derived_map_ac's, and return codes. This is done continuously until a termination signal is received from the master. It is patterned after serve_evaluations_synch().

8.4.2.9 bool duplication_detect (const Variables & *vars*, Response & *response*, const bool *asynch_flag*) [private]

evaluation request has already been performed or queued

Called from map() to check incoming evaluation request for duplication with content of data_pairs and beforeSynchCorePRPQueue. If duplication is detected, return true, else return false. Manage bookkeeping with historyDuplicateMap and beforeSynchDuplicateMap. Note that the list searches can get very expensive if a long list is searched on every new function evaluation (either from a large number of previous jobs, a large number of pending jobs, or both). For this reason, a user request for deactivation of the evaluation cache results in a complete bypass of duplication_detect(), even though a beforeSynchCorePRPQueue search would still be meaningful. Since the intent of this request is to streamline operations, both list searches are bypassed.

8.4.2.10 void self_schedule_evaluations () [private]

using message passing; executes on iteratorComm master

This code is called from synch() to provide the master portion of a master-slave algorithm for the dynamic self-scheduling of evaluations among slave servers. It performs no evaluations locally and matches either serve_evaluations_synch() or serve_evaluations_asynch() on the slave servers, depending on the value of asynchLocalEvalConcurrency. Self-scheduling approach assigns jobs in 2 passes. The 1st pass gives each server the same number of jobs (equal to asynchLocalEvalConcurrency). The 2nd pass assigns the remaining jobs to slave servers as previous jobs are completed. Single- and multilevel parallel use intra- and inter-communicators, respectively, for send/receive. Specific syntax is encapsulated within ParallelLibrary.

8.4.2.11 void static_schedule_evaluations () [private]

using message passing; executes on iteratorComm master

This code runs on the iteratorCommRank 0 processor (the iterator) and is called from synch() in order to assign a static schedule. It matches serve_evaluations_peer() for any other processors within the 1st evaluation partition and serve_evaluations_synch()/serve_evaluations_asynch() for all other evaluation partitions (depending on asynchLocalEvalConcurrency). It performs function evaluations locally for its portion of the static schedule using either asynchronous_local_evaluations() or synchronous_local_evaluations(). Single-level and multilevel parallel use intra- and inter-communicators, respectively, for send/receive. Specific syntax is encapsulated within ParallelLibrary. The iteratorCommRank 0 processor assigns the static schedule since it is the only processor with access to beforeSynchCorePRPQueue (it runs the iterator and calls synchronize). The alternate design of each peer selecting its own jobs using the modulus operator would be applicable if execution of this function (and therefore the job list) were distributed.

8.4.2.12 void asynchronous_local_evaluations (PRPQueue & *prp_queue*) [private]

the local processor

This function provides blocking synchronization for the local asynch case (background system call, nonblocking fork, or threads). It can be called from synch() for a complete local scheduling of all asynchronous jobs or from static_schedule_evaluations() to perform a local portion of the total job set. It uses the derived_map_asynch() to initiate asynchronous evaluations and derived_synch() to capture completed jobs, and mirrors the self_schedule_evaluations() message passing scheduler as much as possible (derived_synch() is modeled after MPI_Waitsome()).

8.4.2.13 void asynchronous_local_evaluations_static (PRPQueue & *prp_queue*) [private]

asynchLocalEvalConcurrency

Locally statically-scheduled counterpart to asynchronous_local_evaluations. This scheduling policy specifically ensures that a completed asynchronous evaluation eval_id is replaced with an equivalent one, modulo asynchLocalEvalConcurrency. Designed to help with parallel tiling. A disadvantage of this scheduling policy is that is could leave local asynchronous worker "servers" idle in parsing the prp_queue, e.g., when restarting and some evals are already complete. In fact, anytime this function is called with non-contiguous eval_id's the full possible concurrency won't be leveraged.

This is currently only supported when DAKOTA is running in serial. Supporting in the MPI static / asynch local hybrid mode would require MPI static schedule that is either fully round-robin or fully block scheduled, not the present hybrid. It is not clear how to support this in the MPI self scheduled / asynch local hybrid mode.

If local evaluation concurrency is unlimited, this function is not needed.

8.4.2.14 void synchronous_local_evaluations (PRPQueue & *prp_queue*) [private]

the local processor

This function provides blocking synchronization for the local synchronous case (foreground system call, blocking fork, or procedure call from derived_map()). It is called from static_schedule_evaluations() to perform a local portion of the total job set.

8.4.2.15 void asynchronous_local_evaluations_nowait (PRPQueue & *prp_queue*) [private]

static-scheduling cases)

This function provides nonblocking synchronization for the local asynch case (background system call, nonblocking fork, or threads). It is called from synch_nowait() and passed the complete set of all asynchronous jobs (beforeSynchCorePRPQueue). It uses derived_map_asynch() to initiate asynchronous evaluations and derived_synch_nowait() to capture completed jobs in nonblocking mode. It mirrors a nonblocking message passing scheduler as much as possible (derived_synch_nowait() modeled after MPI_Testsome()). The result of this function is rawResponseMap, which uses eval_id as a key. It is assumed that the incoming prp_queue contains only active and new jobs - i.e., all completed jobs are cleared by synch_nowait().

Also supports asynchronous local evaluations with static scheduling. This scheduling policy specifically ensures that a completed asynchronous evaluation eval_id is replaced with an equivalent one, modulo asynchLocalEvalConcurrency. In the nowait case, this could render some servers idle if evaluations don't come in eval_id order or some evaluations are cancelled by the caller in between calls. If this function is called with unlimited local eval concurrency, the static scheduling request is ignored.

8.4.2.16 void serve_evaluations_synch () [private]

one synchronous evaluation at a time

This code is invoked by serve_evaluations() to perform one synchronous job at a time on each slave/peer server.

The servers receive requests (blocking receive), do local synchronous maps, and return results. This is done continuously until a termination signal is received from the master (sent via stop_evaluation_servers()).

8.4.2.17 void serve_evaluations_asynch () [private]

multiple asynchronous evaluations

This code is invoked by serve_evaluations() to perform multiple asynchronous jobs on each slave/peer server. The servers test for any incoming jobs, launch any new jobs, process any completed jobs, and return any results. Each of these components is nonblocking, although the server loop continues until a termination signal is received from the master (sent via stop_evaluation_servers()). In the master-slave case, the master maintains the correct number of jobs on each slave. In the static scheduling case, each server is responsible for limiting concurrency (since the entire static schedule is sent to the peers at start up).

8.4.2.18 void serve_evaluations_peer () [private]

one synchronous evaluation at a time as part of the 1st peer

This code is invoked by serve_evaluations() to perform a synchronous evaluation in coordination with the iterator-CommRank 0 processor (the iterator) for static schedules. The bcast() matches either the bcast() in synchronous_-local_evaluations(), which is invoked by static_schedule_evaluations()), or the bcast() in map().

The documentation for this class was generated from the following files:

- ApplicationInterface.H
- ApplicationInterface.C

8.5 Approximation Class Reference

Base class for the approximation class hierarchy.

Inheritance diagram for Approximation::



Public Member Functions

- Approximation ()

  default constructor

- Approximation (ProblemDescDB &problem_db, size_t num_vars)

  standard constructor for envelope

- Approximation (const String &approx_type, const UShortArray &approx_order, size_t num_vars, unsigned short data_order)

  alternate constructor

- Approximation (const Approximation &approx)

  copy constructor

- virtual ~Approximation ()

  destructor

- Approximation operator= (const Approximation &approx)

  assignment operator

- virtual void build ()

  builds the approximation from scratch

- virtual void rebuild ()

  rebuilds the approximation incrementally

- virtual void pop (bool save_sdp_set)

  removes entries from end of currentPoints (last points appended)

- virtual size_t pop_count ()

  based on size of last data set appended

- virtual void restore ()

  restores state prior to previous append()

- virtual bool restore_available ()

  queries availability of restoration for trial set

- virtual size_t restoration_index ()

  return index of trial set within restorable bookkeeping sets

- virtual void finalize ()

  finalize approximation by applying all remaining trial sets

- virtual size_t finalization_index (size_t i)

  return index of i-th trailing trial set within restorable bookkeeping sets

- virtual const Real & get_value (const RealVector &x)

  retrieve the approximate function value for a given parameter vector

- virtual const RealVector & get_gradient (const RealVector &x)

  retrieve the approximate function gradient for a given parameter vector

- virtual const RealSymMatrix & get_hessian (const RealVector &x)

  retrieve the approximate function Hessian for a given parameter vector

- virtual const Real & get_prediction_variance (const RealVector &x)

  retrieve the variance of the predicted value for a given parameter vector

- virtual const Real & get_diagnostic (const String &metric_type)

  retrieve the diagnostic metric for the diagnostic type specified

- virtual const RealVector & approximation_coefficients () const

  return the coefficient array computed by build()/rebuild()

- virtual void approximation_coefficients (const RealVector &approx_coeffs)

  computing with build()/rebuild()

- virtual void print_coefficients (std::ostream &s) const

  print the coefficient array computed in build()/rebuild()

- virtual int min_coefficients () const

  build the derived class approximation type in numVars dimensions

- virtual int recommended_coefficients () const

  build the derived class approximation type in numVars dimensions

- virtual int num_constraints () const

  return the number of constraints to be enforced via anchorPoint

- virtual void clear_current ()

  clear current build data in preparation for next build

- virtual const bool diagnostics_available ()

  check if diagnostics are available for this approximation type

- int min_points (bool constraint_flag) const

  type in numVars dimensions. Uses ∗_coefficients() and num_constraints().

- int recommended_points (bool constraint_flag) const

  in numVars dimensions (default same as min_points)

- int num_variables () const

  return the number of variables used in the approximation

- const SDPList & current_points () const

  return currentPoints

- const Pecos::SurrogateDataPoint & anchor_point () const

  return anchorPoint

- void update (const Variables &vars, const Response &response, int fn_index)

  populates/replaces anchorPoint

- void update (const RealVector &c_vars, const Real &fn_val, const RealVector &fn_grad, const RealSymMatrix &fn_hess)

  populates/replaces anchorPoint

- void update (const RealMatrix &samples, const ResponseArray &resp_array, int fn_index)

  populates/replaces currentPoints

- void update (const VariablesArray &vars_array, const ResponseArray &resp_array, int fn_index)

  populates/replaces currentPoints

- void append (const Variables &vars, const Response &response, int fn_index)

  appends one additional entry to currentPoints

- void append (const RealVector &c_vars, const Real &fn_val, const RealVector &fn_grad, const RealSymMatrix &fn_hess)

  appends one additional entry to currentPoints

- void append (const RealMatrix &samples, const ResponseArray &resp_array, int fn_index)

  appends multiple additional entries to currentPoints

- void append (const VariablesArray &vars_array, const ResponseArray &resp_array, int fn_index)

  appends multiple additional entries to currentPoints

- bool anchor () const

  queries the status of anchorPoint

- void clear_all ()

  clear all build data (current and history) to restore original state

- void set_bounds (const RealVector &lower, const RealVector &upper)

  set approximation lower and upper bounds (currently only used by graphics)

- Approximation * approx_rep () const

  that are not mapped to the top Approximation level

Protected Member Functions

- Approximation (BaseConstructor, const ProblemDescDB &problem_db, size_t num_vars)

  derived class constructors - Coplien, p. 139)

Protected Attributes

- short outputLevel

  output verbosity level: {SILENT,QUIET,NORMAL,VERBOSE,DEBUG}_OUTPUT

- int numVars

  number of variables in the approximation

- String approxType

  approximation type identifier

- unsigned short dataOrder

  request vector 3-bit format.

- Real approxValue

  value of the approximation returned by get_value()

- RealVector approxGradient

  gradient of the approximation returned by get_gradient()

- RealSymMatrix approxHessian

  Hessian of the approximation returned by get_hessian().

- Real approxVariance

  value of the approximation returned by get_prediction_variance()

- Real approxDiagnostic

  value of the diagnostic returned by get_diagnostic()

- SDPList currentPoints

  are fit approximately (e.g., using least squares regression).

- Pecos::SurrogateDataPoint anchorPoint

  least squares regression).

- RealVector approxLowerBounds

  approximation lower bounds (used by 3D graphics and Surfpack KrigingModel)

- RealVector approxUpperBounds

  approximation upper bounds (used by 3D graphics and Surfpack KrigingModel)

Private Member Functions

- Approximation ∗ get_approx (ProblemDescDB &problem_db, size_t num_vars)

  approxRep to the appropriate derived type.

- Approximation ∗ get_approx (const String &approx_type, const UShortArray &approx_order, size_t num_vars, unsigned short data_order)

  approxRep to the appropriate derived type.

- void add (const Variables &vars, const Response &response, int fn_index, bool anchor_flag)

  extract the relevant RealVector from Variables and invoke add(RealVector&)

- void add (const Real ∗sample_c_vars, const Response &response, int fn_index, bool anchor_flag)

  create a RealVector view and invoke add(RealVector&)

- void add (const RealVector &sample_c_vars, const Response &response, int fn_index, bool anchor_flag)

  dictated by anchor_flag. Uses add_point() and add_anchor().

- void add_point (const RealVector &x, const Real &fn_val, const RealVector &fn_grad, const RealSymMatrix &fn_hess)

  add a new data point by appending to currentPoints

- void add_anchor (const RealVector &x, const Real &fn_val, const RealVector &fn_grad, const RealSymMatrix &fn_hess)

  add a new data point by assigning to anchorPoint

Private Attributes

- SDP2DArray savedSDPSets

  that is later restored (in restore() and finalize())

- size_t popCount

  number of points previously added by append() to be removed by pop()

- Approximation * approxRep

  pointer to the letter (initialized only for the envelope)

- int referenceCount

  number of objects sharing approxRep

8.5.1 Detailed Description

Base class for the approximation class hierarchy.

The Approximation class is the base class for the response data fit approximation class hierarchy in DAKOTA. One instance of an Approximation must be created for each function to be approximated (a vector of Approximations is contained in ApproximationInterface). For memory efficiency and enhanced polymorphism, the approximation hierarchy employs the "letter/envelope idiom" (see Coplien "Advanced C++", p. 133), for which the base class (Approximation) serves as the envelope and one of the derived classes (selected in Approximation::get_approx()) serves as the letter.

8.5.2 Constructor & Destructor Documentation

8.5.2.1 Approximation ()

default constructor

The default constructor is used in Array<Approximation> instantiations and by the alternate envelope constructor. approxRep is NULL in this case (problem_db is needed to build a meaningful Approximation object). This makes it necessary to check for NULL in the copy constructor, assignment operator, and destructor.

8.5.2.2 Approximation (ProblemDescDB & *problem_db*, size_t *num_vars*)

standard constructor for envelope

Envelope constructor only needs to extract enough data to properly execute get_approx, since Approximation(BaseConstructor, problem_db) builds the actual base class data for the derived approximations.

8.5.2.3 Approximation (const String & *approx_type*, const UShortArray & *approx_order*, size_t *num_vars*, unsigned short *data_order*)

alternate constructor

This is the alternate envelope constructor for instantiations on the fly. Since it does not have access to problem_-db, the letter class is not fully populated. This constructor executes get_approx(type), which invokes the default constructor of the derived letter class, which in turn invokes the default constructor of the base class.

8.5.2.4 Approximation (const Approximation & *approx*)

copy constructor

Copy constructor manages sharing of approxRep and incrementing of referenceCount.

8.5.2.5 ~Approximation () [virtual]

destructor

Destructor decrements referenceCount and only deletes approxRep when referenceCount reaches zero.

8.5.2.6 Approximation (BaseConstructor, const ProblemDescDB & *problem_db*, size_t *num_vars*) [protected]

derived class constructors - Coplien, p. 139)

This constructor is the one which must build the base class data for all derived classes. get_approx() instantiates a derived class letter and the derived constructor selects this base class constructor in its initialization list (to avoid recursion in the base class constructor calling get_approx() again). Since the letter IS the representation, its rep pointer is set to NULL (an uninitialized pointer causes problems in ~Approximation).

8.5.3 Member Function Documentation

8.5.3.1 Approximation operator= (const Approximation & *approx*)

assignment operator

Assignment operator decrements referenceCount for old approxRep, assigns new approxRep, and increments referenceCount for new approxRep.

8.5.3.2 void clear_current () [inline, virtual]

clear current build data in preparation for next build

Redefined by TANA3Approximation to clear current data but preserve history.

Reimplemented in TANA3Approximation.

8.5.3.3 void clear_all () [inline]

clear all build data (current and history) to restore original state

Clears out any history (e.g., TANA3Approximation use for a different response function in NonDReliability).

8.5.3.4 Approximation * get_approx (ProblemDescDB & *problem_db*, size_t *num_vars*) [private]

approxRep to the appropriate derived type.

Used only by the envelope constructor to initialize approxRep to the appropriate derived type.

8.5.3.5 Approximation * get_approx (const String & *approx_type*, const UShortArray & *approx_order*, size_t *num_vars*, unsigned short *data_order*) [private]

approxRep to the appropriate derived type.

Used only by the envelope constructor to initialize approxRep to the appropriate derived type.

8.5.4 Member Data Documentation

8.5.4.1 unsigned short dataOrder [protected]

request vector 3-bit format.

This setting should not be inferred from the responses specification, since we may need gradient support for evaluating gradients at a single point (e.g., the center of a trust region), but not require gradient evaluations at every point.

The documentation for this class was generated from the following files:

- DakotaApproximation.H
- DakotaApproximation.C

8.6 ApproximationInterface Class Reference

approximations to simulation-based results.

Inheritance diagram for ApproximationInterface::



Public Member Functions

- ApproximationInterface (ProblemDescDB &problem_db, const Variables &actual_model_vars, size_t num_fns)

  primary constructor

- ApproximationInterface (const String &approx_type, const UShortArray &approx_order, const Variables &actual_model_vars, size_t num_fns, unsigned short data_order)

  alternate constructor for instantiations on the fly

- ~ApproximationInterface ()

  destructor

Protected Member Functions

- void map (const Variables &vars, const ActiveSet &set, Response &response, const bool asynch_flag=false)

  the variables to the responses using functionSurfaces

- int minimum_points (bool constraint_flag) const

  functionSurfaces

- int recommended_points (bool constraint_flag) const

  functionSurfaces

- void approximation_function_indices (const IntSet &approx_fn_indices)

  set the (currently active) approximation function index set

- void update_approximation (const Variables &vars, const Response &response)
- void update_approximation (const RealMatrix &samples, const ResponseArray &resp_array)
- void update_approximation (const VariablesArray &vars_array, const ResponseArray &resp_array)
- void append_approximation (const Variables &vars, const Response &response)
- void append_approximation (const RealMatrix &samples, const ResponseArray &resp_array)

- void append_approximation (const VariablesArray &vars_array, const ResponseArray &resp_array)
- void build_approximation (const BoolDeque &rebuild_deque, const RealVector &lower_bnds, const RealVector &upper_bnds)
- void rebuild_approximation (const BoolDeque &rebuild_deque)
- void pop_approximation (bool save_sdp_set)
- void restore_approximation ()
- bool restore_available ()
- void finalize_approximation ()

  finalizes the approximation by applying all trial increments

- void clear_current ()

  clears current data from an approximation interface

- void clear_all ()

  clears all data from an approximation interface

- bool anchor () const

  queries the presence of an anchorPoint within an approximation interface

- const Pecos::SurrogateDataPoint & anchor_point () const

  returns the anchorPoint used within an approximation interface

- std::vector< Approximation > & approximations ()

  retrieve the Approximations within an ApproximationInterface

- const RealVectorArray & approximation_coefficients ()

  within an ApproximationInterface

- void approximation_coefficients (const RealVectorArray &approx_coeffs)

  within an ApproximationInterface

- const RealVector & approximation_variances (const RealVector &c_vars)

  within an ApproximationInterface

- const SDPList & approximation_data (size_t index)

  within an ApproximationInterface

- const IntResponseMap & synch ()

  recovers data from a series of asynchronous evaluations (blocking)

- const IntResponseMap & synch_nowait ()

  recovers data from a series of asynchronous evaluations (nonblocking)

Private Attributes

- IntSet approxFnIndices

  response function subset that is approximated

- std::vector< Approximation > functionSurfaces

  list of approximations, one per response function

- RealVectorArray functionSurfaceCoeffs

  response function

- RealVector functionSurfaceVariances

  vector of approximation variances, one value per response function

- SDPList functionSurfaceDataPoints

  for a particular response function

- StringArray diag_list

  List of diagnostic metrics.

- Variables actualModelVars

  among differing variable views

- IntResponseMap beforeSynchResponseMap

  but asynchronous virtual functions are supported through bookkeeping).

8.6.1 Detailed Description

approximations to simulation-based results.

ApproximationInterface provides an interface class for building a set of global/local/multipoint approximations and performing approximate function evaluations using them. It contains a list of Approximation objects, one for each response function.

8.6.2 Member Function Documentation

8.6.2.1 void update_approximation (const Variables & *vars*, const Response & *response*) [protected, virtual]

This function populates/replaces each Approximation::anchorPoint with the incoming variables/response data point.

Reimplemented from Interface.

8.6.2.2 void update_approximation (const RealMatrix & *samples*, const ResponseArray & *resp_array*) [protected, virtual]

This function populates/replaces each Approximation::currentPoints with the incoming variables/response arrays.

Reimplemented from Interface.

8.6.2.3 void update_approximation (const VariablesArray & *vars_array*, const ResponseArray & *resp_array*) [protected, virtual]

This function populates/replaces each Approximation::currentPoints with the incoming variables/response arrays.

Reimplemented from Interface.

8.6.2.4 void append_approximation (const Variables & *vars*, const Response & *response*) [protected, virtual]

This function appends to each Approximation::currentPoints with one incoming variables/response data point.

Reimplemented from Interface.

8.6.2.5 void append_approximation (const RealMatrix & *samples*, const ResponseArray & *resp_array*) [protected, virtual]

This function appends to each Approximation::currentPoints with multiple incoming variables/response data points.

Reimplemented from Interface.

8.6.2.6 void append_approximation (const VariablesArray & *vars_array*, const ResponseArray & *resp_array*) [protected, virtual]

This function appends to each Approximation::currentPoints with multiple incoming variables/response data points.

Reimplemented from Interface.

8.6.2.7 void build_approximation (const BoolDeque & *rebuild_deque*, const RealVector & *lower_bnds*, const RealVector & *upper_bnds*) [protected, virtual]

This function finds the coefficients for each Approximation based on the data passed through update_-approximation() calls. The bounds are used only for graphics visualization.

Reimplemented from Interface.

8.6.2.8 void rebuild_approximation (const BoolDeque & *rebuild_deque*) [protected, virtual]

This function updates the coefficients for each Approximation based on data increments provided by {update,append}_approximation().

Reimplemented from Interface.

8.6.2.9 void pop_approximation (bool *save_sdp_set*) [protected, virtual]

This function removes data provided by a previous call to append_approximation().

Reimplemented from Interface.

8.6.2.10 void restore_approximation () [protected, virtual]

This function updates the coefficients for each Approximation based on data increments provided by {update,append}_approximation().

Reimplemented from Interface.

8.6.2.11 bool restore_available () [protected, virtual]

This function updates the coefficients for each Approximation based on data increments provided by {update,append}_approximation().

Reimplemented from Interface.

8.6.3 Member Data Documentation

8.6.3.1 std::vector<Approximation> functionSurfaces [private]

list of approximations, one per response function

This formulation allows the use of mixed approximations (i.e., different approximations used for different response functions), although the input specification is not currently general enough to support it.

The documentation for this class was generated from the following files:

- ApproximationInterface.H
- ApproximationInterface.C

8.7 APPSEvalMgr Class Reference

Evaluation manager class for APPSPACK.

Public Member Functions

- APPSEvalMgr (Model &model)

  Evaluation manager class for APPSPACK.

- ~APPSEvalMgr ()

  destructor

- bool isReadyForWork () const

  tells APPS whether or not there is a processor available to perform a function evaluation

- bool submit (const int apps_tag, const HOPSPACK::Vector &apps_xtrial, HOPSPACK::EvalRequestType apps_request)

  performs a function evaluation at APPS-provided x_in

- int recv (int &apps_tag, HOPSPACK::Vector &apps_f, HOPSPACK::Vector &apps_cEqs, HOPSPACK::Vector &apps_cIneqs, string &apps_msg)

  returns a function value to APPS

- void printDebugInfo (void) const

  empty implementation of debug info needed to complete the interface

- void printTimingInfo (void) const

  empty implementation of timing info needed to complete the interface

- void set_asynch_flag (const bool dakotaAsynchFlag)

  publishes whether or not to do asynchronous evaluations

- void set_blocking_synch (const bool blockingSynchFlag)

  publishes whether or not APPS is operating synchronously

- void set_total_workers (const int numDakotaWorkers)

  publishes the number of processors available for function evaluations

- void set_constraint_map (std::vector< int > constraintMapIndices, std::vector< double > constraintMapMultipliers, std::vector< double > constraintMapOffsets)

  publishes constraint transformation

Private Attributes

- Model & iteratedModel

  reference to the APPSOptimizer's model passed in the constructor

- bool modelAsynchFlag

  flag for asynchronous function evaluations

- bool blockingSynch

  flag for APPS synchronous behavior

- int numWorkersUsed

  number of processors actively performing function evaluations

- int numWorkersTotal

  total number of processors available for performing function evaluations

- std::vector< int > constrMapIndices

  map from Dakota constraint number to APPS constraint number

- std::vector< double > constrMapMultipliers

  multipliers for constraint transformations

- std::vector< double > constrMapOffsets

  offsets for constraint transformations

- RealVector xTrial

  trial iterate

- std::map< int, int > tagList

  map of DAKOTA eval id to APPS eval id (for asynchronous evaluations)

- std::map< int, RealVector > functionList

  map of APPS eval id to responses (for synchronous evaluations)

- IntResponseMap dakotaResponseMap

  map of DAKOTA responses returned by synchronize_nowait()

8.7.1 Detailed Description

Evaluation manager class for APPSPACK.

The APPSEvalMgr class is derived from APPSPACK's Executor class. It implements the methods of that class in such away that allows DAKOTA to manage the computation of responses instead of APPS. Iterate and response values are passed between Dakota and APPSPACK via this interface.

8.7.2 Constructor & Destructor Documentation

8.7.2.1 APPSEvalMgr (Model & *model*)

Evaluation manager class for APPSPACK.

The APPSEvalMgr class is derived from APPSPACK's Executor class. It implements the methods of that class in such away that allows DAKOTA to manage the computation of responses instead of APPS. Iterate and response values are passed between Dakota and APPSPACK via this interface.

8.7.3 Member Function Documentation

8.7.3.1 bool isReadyForWork () const

tells APPS whether or not there is a processor available to perform a function evaluation

Check to see if all processors available for function evaluations are being used. If not, tell APPS that one is available.

8.7.3.2 bool submit (const int *apps_tag*, const HOPSPACK::Vector & *apps_xtrial*, HOPSPACK::EvalRequestType *apps_request*)

performs a function evaluation at APPS-provided x_in

Convert APPSPACK vector of variables to DAKOTA vector of variables and perform function evaluation asynchronously or not as specified in the DAKOTA input deck. If evaluation is asynchronous, map the dakota id to the APPS tag. If evaluation is synchronous, map the responses to the APPS tag.

8.7.3.3 int recv (int & *apps_tag*, HOPSPACK::Vector & *apps_f*, HOPSPACK::Vector & *apps_cEqs*, HOPSPACK::Vector & *apps_cIneqs*, string & *apps_msg*)

returns a function value to APPS

Retrieve a set of reponse values, convert to APPS data structures, and return them to APPS. APPS tags are tied to corresponding responses using the appropriate (i.e., asynchronous or synchronous) map.

The documentation for this class was generated from the following files:

- APPSEvalMgr.H
- APPSEvalMgr.C

8.8 APPSOptimizer Class Reference

Wrapper class for APPSPACK.

Inheritance diagram for APPSOptimizer::



Public Member Functions

- APPSOptimizer (Model &model)

  Wrapper class for HOPSPACK.

- APPSOptimizer (NoDBBaseConstructor, Model &model)

  alternate constructor for on-the-fly instantiations

- ~APPSOptimizer ()

  destructor

- void find_optimum ()

  Performs the iterations to determine the optimal solution.

Protected Member Functions

- void set_apps_parameters ()

  sets options for specific methods based on user specifications

- void initialize_variables_and_constraints ()

  initializes problem variables and constraints

Protected Attributes

- HOPSPACK::ParameterList params

  Pointer to APPS parameter list.

- HOPSPACK::ParameterList * problemParams
  Pointer to APPS problem parameter sublist.
- HOPSPACK::ParameterList * linearParams
  Pointer to APPS linear constraint parameter sublist.
- HOPSPACK::ParameterList * mediatorParams
  Pointer to APPS mediator parameter sublist.
- HOPSPACK::ParameterList * citizenParams
  Pointer to APPS citizen/algorithm parameter sublist.
- APPSEvalMgr * evalMgr
  Pointer to the APPS evaluation manager object.
- std::vector< int > constraintMapIndices
  map from Dakota constraint number to APPS constraint number
- std::vector< double > constraintMapMultipliers
  multipliers for constraint transformations
- std::vector< double > constraintMapOffsets
  offsets for constraint transformations

8.8.1 Detailed Description

Wrapper class for APPSPACK.

The APPSOptimizer class provides a wrapper for APPSPACK, a Sandia-developed C++ library for generalized pattern search. APPSPACK defaults to a coordinate pattern search but also allows for augmented search patterns. It can solve problems with bounds, linear constraints, and general nonlinear constraints. APPSOptimizer uses an APPSEvalMgr object to manage the function evaluations.

The user input mappings are as follows: `output` `max_function_evaluations`, `constraint_tol` `initial_delta`, `contraction_factor`, `threshold_delta`, `solution_target`, `synchronization`, `merit_function`, `constraint_penalty`, and `smoothing_factor` are mapped into APPS's `"Debug"`, "Maximum Evaluations", "Bounds Tolerance"/"Machine Epsilon"/"Constraint Tolerance", "Initial Step", "Contraction Factor", "Step Tolerance", "Function Tolerance", "Synchronous", "Method", "Initial Penalty Value", and "Initial Smoothing Value" data attributes. Refer to the APPS web site (`http://software.sandia.gov/appspack`) for additional information on APPS objects and controls.

8.8.2 Constructor & Destructor Documentation

8.8.2.1 APPSOptimizer (Model & *model*)

Wrapper class for HOPSPACK.

The APPSOptimizer class provides a wrapper for HOPSPACK, a Sandia-developed C++ library for generalized pattern search. HOPSPACK defaults to a coordinate pattern search but also allows for augmented search patterns. It can solve problems with bounds, linear constraints, and general nonlinear constraints. APPSOptimizer uses an APPSEvalMgr object to manage the function evaluations.

The user input mappings are as follows: `output` `max_function_evaluations`, `constraint_tol` `initial_delta`, `contraction_factor`, `threshold_delta`, `solution_target`, `synchronization`, `merit_function`, `constraint_penalty`, and `smoothing_factor` are mapped into HOPS's `"Display"`, "Maximum Evaluations", "Active Tolerance"/"Nonlinear Active Tolerance", "Initial Step", "Contraction Factor", "Step Tolerance", "Objective Target", "Synchronous Evaluations", "Penalty Function", "Penalty Parameter", and "Penalty Smoothing Value" data attributes. Refer to the HOPS web site (`https://software.sandia.gov/trac/hopspack`) for additional information on HOPS objects and controls.

8.8.3 Member Function Documentation

8.8.3.1 void find_optimum () [virtual]

Performs the iterations to determine the optimal solution.

find_optimum redefines the Optimizer virtual function to perform the optimization using HOPS. It first sets up the problem data, then executes minimize() on the HOPS optimizer, and finally catalogues the results.

Implements Optimizer.

8.8.3.2 void set_apps_parameters () [protected]

sets options for specific methods based on user specifications

Set all of the HOPS algorithmic parameters as specified in the DAKOTA input deck. This is called at construction time.

8.8.3.3 void initialize_variables_and_constraints () [protected]

initializes problem variables and constraints

Set the variables and constraints as specified in the DAKOTA input deck. This is done at run time.

The documentation for this class was generated from the following files:

- APPSOptimizer.H
- APPSOptimizer.C

8.9 BaseConstructor Struct Reference

Dummy struct for overloading letter-envelope constructors.

Public Member Functions

- BaseConstructor (int=0)

  C++ structs can have constructors.

8.9.1 Detailed Description

Dummy struct for overloading letter-envelope constructors.

BaseConstructor is used to overload the constructor for the base class portion of letter objects. It avoids infinite recursion (Coplien p.139) in the letter-envelope idiom by preventing the letter from instantiating another envelope. Putting this struct here avoids circular dependencies.

The documentation for this struct was generated from the following file:

- global_defs.h

8.10 BiStream Class Reference

data types

Public Member Functions

- BiStream ()

  Default constructor, need to open.

- BiStream (const char *s)

  Constructor takes name of input file.

- BiStream (const char *s, std::ios_base::openmode mode)

  Constructor takes name of input file, mode.

- ~BiStream ()

  Destructor, calls xdr_destroy to delete xdr stream.

- BiStream & operator>> (String &ds)

  Binary Input stream operator>>.

- BiStream & operator>> (char *s)

  Input operator, reads char from binary stream BiStream.*

- BiStream & operator>> (char &c)

  Input operator, reads char from binary stream BiStream.

- BiStream & operator>> (int &i)

  Input operator, reads int from binary stream BiStream.*

- BiStream & operator>> (long &l)

  Input operator, reads long from binary stream BiStream.

- BiStream & operator>> (short &s)

  Input operator, reads short from binary stream BiStream.

- BiStream & operator>> (bool &b)

  Input operator, reads bool from binary stream BiStream.

- BiStream & operator>> (double &d)

  Input operator, reads double from binary stream BiStream.

- BiStream & operator>> (float &f)

  Input operator, reads float from binary stream BiStream.

- BiStream & operator>> (unsigned char &c)

  Input operator, reads unsigned char∗ from binary stream BiStream.

- BiStream & operator>> (unsigned int &i)

  Input operator, reads unsigned int from binary stream BiStream.

- BiStream & operator>> (unsigned long &l)

  Input operator, reads unsigned long from binary stream BiStream.

- BiStream & operator>> (unsigned short &s)

  Input operator, reads unsigned short from binary stream BiStream.

Private Attributes

- XDR xdrInBuf

  XDR input stream buffer.

- char inBuf [MAX_NETOBJ_SZ]

  Buffer to hold data as it is read in.

8.10.1 Detailed Description

data types

The Dakota::BiStream class is a binary input class which overloads the >> operator for all standard data types (int, char, float, etc). The class relies on the methods within the ifstream base class. The Dakota::BiStream class inherits from the ifstream class. If available, the class utilize rpc/xdr to construct machine independent binary files. These Dakota restart files can be moved from host to host. The motivation to develop these classes was to replace the Rogue wave classes which Dakota historically used for binary I/O.

8.10.2 Constructor & Destructor Documentation

8.10.2.1 BiStream ()

Default constructor, need to open.

Default constructor, allocates xdr stream , but does not call the open method. The open method must be called before stream can be read.

8.10.2.2 BiStream (const char ∗ *s*)

Constructor takes name of input file.

Constructor which takes a char∗ filename. Calls the base class open method with the filename and no other arguments. Also allocates the xdr stream.

8.10.2.3 BiStream (const char * *s*, std::ios_base::openmode *mode*)

Constructor takes name of input file, mode.

Constructor which takes a char* filename and int flags. Calls the base class open method with the filename and flags as arguments. Also allocates xdr stream.

8.10.2.4 ~BiStream ()

Destructor, calls xdr_destroy to delete xdr stream.

Destructor, destroys the xdr stream allocated in constructor

8.10.3 Member Function Documentation

8.10.3.1 BiStream & operator>> (String & *ds*)

Binary Input stream operator>>.

The String input operator must first read both the xdr buffer size and the size of the string written. Once these our read it can then read and convert the String correctly.

8.10.3.2 BiStream & operator>> (char * *s*)

Input operator, reads char* from binary stream BiStream.

Reading char array is a special case. The method has no way of knowing if the length to the input array is large enough, it assumes it is one char longer than actual string, (Null terminator added). As with the String the size of the xdr buffer as well as the char array size written must be read from the stream prior to reading and converting the char array.

The documentation for this class was generated from the following files:

- DakotaBinStream.H
- DakotaBinStream.C

8.11 BoStream Class Reference

data types

Public Member Functions

- BoStream ()

  Default constructor, need to open.

- BoStream (const char ∗s)

  Constructor takes name of input file.

- BoStream (const char ∗s, std::ios_base::openmode mode)

  Constructor takes name of input file, mode.

- ∼BoStream ()

  Destructor, calls xdr_destroy to delete xdr stream.

- BoStream & operator<< (const String &ds)

  Binary Output stream operator<<.

- BoStream & operator<< (const char ∗s)

  Output operator, writes char∗ TO binary stream BoStream.

- BoStream & operator<< (const char &c)

  Output operator, writes char to binary stream BoStream.

- BoStream & operator<< (const int &i)

  Output operator, writes int to binary stream BoStream.

- BoStream & operator<< (const long &l)

  Output operator, writes long to binary stream BoStream.

- BoStream & operator<< (const short &s)

  Output operator, writes short to binary stream BoStream.

- BoStream & operator<< (const bool &b)

  Output operator, writes bool to binary stream BoStream.

- BoStream & operator<< (const double &d)

  Output operator, writes double to binary stream BoStream.

- BoStream & operator<< (const float &f)

  Output operator, writes float to binary stream BoStream.

- BoStream & operator<< (const unsigned char &c)

  Output operator, writes unsigned char to binary stream BoStream.

- BoStream & operator<< (const unsigned int &i)

  Output operator, writes unsigned int to binary stream BoStream.

- BoStream & operator<< (const unsigned long &l)

  Output operator, writes unsigned long to binary stream BoStream.

- BoStream & operator<< (const unsigned short &s)

  Output operator, writes unsigned short to binary stream BoStream.

Private Attributes

- XDR xdrOutBuf

  XDR output stream buffer.

- char outBuf [MAX_NETOBJ_SZ]

  Buffer to hold converted data before it is written.

8.11.1 Detailed Description

data types

The Dakota::BoStream class is a binary output classes which overloads the << operator for all standard data types (int, char, float, etc). The class relies on the built in write methods within the ostream base classes. Dakota::BoStream inherits from the ofstream class. The motivation to develop this class was to replace the Rogue wave class which Dakota historically used for binary I/O. If available, the class utilize rpc/xdr to construct machine independent binary files. These Dakota restart files can be moved between hosts.

8.11.2 Constructor & Destructor Documentation

8.11.2.1 BoStream ()

Default constructor, need to open.

Default constructor allocates the xdr stream but does not call the open() method. The open() method must be called before stream can be written to.

8.11.2.2 BoStream (const char * *s*)

Constructor takes name of input file.

Constructor, takes char * filename as argument. Calls base class open method with filename and no other arguments. Also allocates xdr stream

8.11.2.3 BoStream (const char * *s*, std::ios_base::openmode *mode*)

Constructor takes name of input file, mode.

Constructor, takes char * filename and int flags as arguments. Calls base class open method with filename and flags as arguments. Also allocates xdr stream. Note : If no rpc/xdr support xdr calls are #ifdef'd out.

8.11.3 Member Function Documentation

8.11.3.1 BoStream & operator<< (const String & *ds*)

Binary Output stream operator<<.

The String operator<< must first write the xdr buffer size and the original string size to the stream. The input operator needs this information to be able to correctly read and convert the String.

8.11.3.2 BoStream & operator<< (const char * *s*)

Output operator, writes char* TO binary stream BoStream.

The output of char* is the same as the output of the String. The size of the xdr buffer and the size of the string must be written first, then the string itself.

The documentation for this class was generated from the following files:

- DakotaBinStream.H
- DakotaBinStream.C

8.12 COLINApplication Class Reference

Public Member Functions

- COLINApplication ()

  Default constructor. Rrequired by COLIN's ApplicationHandle creation.

- COLINApplication (Model &model)

  Constructor with Model (not presently used).

- ~COLINApplication ()

  Destructor.

- void set_problem (Model &model)

  information from the Model and set it for COLIN.

- void set_blocking_synch (const bool blockingSynchFlag)

  publishes whether or not COLIN is operating synchronously

- virtual utilib::Any spawn_evaluation_impl (const utilib::Any &domain, const colin::AppRequest::request_map_t &requests, utilib::seed_t &seed)

  returning a DAKOTA-specific evaluation tracking ID.

- virtual bool evaluation_available ()

  Check to see if there are any function values ready to be collected.

- virtual void perform_evaluation_impl (const utilib::Any &domain, const colin::AppRequest::request_map_t &requests, utilib::seed_t &seed, colin::AppResponse::response_map_t &colin_responses)

  Perform a function evaluation at t given point.

- virtual utilib::Any collect_evaluation_impl (colin::AppResponse::response_map_t &responses, utilib::seed_t &seed)

  Collect a completed evaluation from DAKOTA.

- virtual void colin_request_to_dakota_request (const utilib::Any &domain, const colin::AppRequest::request_map_t &requests, utilib::seed_t &seed)

  structures to DAKOTA structures.

- virtual void dakota_response_to_colin_response (const Response &dakota_response, colin::AppResponse::response_map_t &colin_responses)

  structures to COLIN structures.

- virtual bool map_domain (const utilib::Any &src, utilib::Any &native, bool forward=true) const

  Map the domain point into data type desired by this application context.

Protected Attributes

- Model iteratedModel

  Shallow copy of the model on which COLIN will iterate.

- bool blockingSynch

  Flag for COLIN synchronous behavior (Pattern Search only).

- ActiveSet activeSet

  Local copy of model's active set for convenience.

- std::vector< int > requestedEvals

  Evaluations queued for asynch evaluation.

- IntResponseMap dakota_responses

  eval_id to response mapping to cache completed jobs.

8.12.1 Detailed Description

COLINApplication is a DAKOTA class that is derived from COLIN's Application hierarchy. It redefines a variety of virtual COLIN functions to use the corresponding DAKOTA functions. This is a more flexible algorithm library interfacing approach than can be obtained with the function pointer approaches used by NPSOLOptimizer and SNLLOptimizer.

8.12.2 Member Function Documentation

8.12.2.1 void set_problem (Model & *model*)

information from the Model and set it for COLIN.

Set variable bounds and linear and nonlinear constraints. This avoids using probDescDB, so it is called by both the standard and the on-the-fly COLINOptimizer constructors.

8.12.2.2 utilib::Any spawn_evaluation_impl (const utilib::Any & *domain*, const colin::AppRequest::request_map_t & *requests*, utilib::seed_t & *seed*) `[virtual]`

returning a DAKOTA-specific evaluation tracking ID.

Schedule one or more requests at specified domain point, returning a DAKOTA-specific evaluation tracking ID. This is only called by COLIN's concurrent evaluator, which is only instantiated when the Model supports asynch evals. The domain point is guaranteed to be compatible with data type specified by map_domain(...)

8.12.2.3 bool evaluation_available () `[virtual]`

Check to see if there are any function values ready to be collected.

Check to see if any asynchronous evaluations have finished. This is only called by COLIN's concurrent evaluator, which is only instantiated when the Model supports asynch evals.

8.12.2.4 void perform_evaluation_impl (const utilib::Any & *domain*, const colin::AppRequest::request_map_t & *requests*, utilib::seed_t & *seed*, colin::AppResponse::response_map_t & *colin_responses*) `[virtual]`

Perform a function evaluation at t given point.

Perform an evaluation at a specified domain point. Wait for and return the response. This is only called by COLIN's serial evaluator, which is only instantiated when the Model does not support asynch evals. The domain point is guaranteed to be compatible with data type specified by map_domain(...)

8.12.2.5 utilib::Any collect_evaluation_impl (colin::AppResponse::response_map_t & *colin_responses*, utilib::seed_t & *seed*) `[virtual]`

Collect a completed evaluation from DAKOTA.

Collect the next completed evaluation from DAKOTA. Always returns the evalid of the response returned.

8.12.2.6 void colin_request_to_dakota_request (const utilib::Any & *domain*, const colin::AppRequest::request_map_t & *requests*, utilib::seed_t & *seed*) `[virtual]`

structures to DAKOTA structures.

Map COLIN info requests to DAKOTA objectives and constraints.

8.12.2.7 void dakota_response_to_colin_response (const Response & *dakota_response*, colin::AppResponse::response_map_t & *colin_responses*) `[virtual]`

structures to COLIN structures.

Map DAKOTA objective and constraint values to COLIN response.

8.12.2.8 bool map_domain (const utilib::Any & *src*, utilib::Any & *native*, bool *forward* = `true`) const `[virtual]`

Map the domain point into data type desired by this application context.

Map the domain point into data type desired by this application context (utilib::MixedIntVars). This data type can be exposed from the Any &domain presented to spawn and collect.

The documentation for this class was generated from the following files:

- COLINApplication.H
- COLINApplication.C

8.13 COLINOptimizer Class Reference

Wrapper class for optimizers defined using COLIN.

Inheritance diagram for COLINOptimizer::



Public Member Functions

- COLINOptimizer (Model &model)

  Default constructor.

- COLINOptimizer (Model &model, int seed)

  Alternate constructor for on-the-fly instantiations.

- COLINOptimizer (NoDBBaseConstructor, Model &model)

  Alternate constructor for Iterator instantiations by name.

- ~COLINOptimizer ()

  destructor

- void find_optimum ()

  iterates the COLIN solver to determine the optimal solution

- bool returns_multiple_points () const

  Designate which solvers can return multiple final points.

Protected Member Functions

- void solver_setup (Model &model)

  instantiate the solver.

- void set_rng (int seed)

  Instantiate random number generator (RNG).

- void set_solver_parameters ()

  construction time.

- void post_run (std::ostream &s)

  function value

- void resize_final_points (size_t newsize)

  resize bestVariablesArray

- void resize_final_responses (size_t newsize)

  resize bestResponseArray

Protected Attributes

- short solverType

  COLIN solver sub-type as enumerated in COLINOptimizer.C.

- colin::SolverHandle colinSolver

  handle to the COLIN solver

- std::pair< colin::ApplicationHandle, COLINApplication * > colinProblem

  handle and pointer to the COLINApplication object

- colin::EvaluationManager_Base * colinEvalMgr

  pointer to the COLIN evalutaion manager object

- utilib::RNG * rng

  random number generator pointer

- bool blockingSynch

  `nonblocking`

- Real constraint_penalty

  Buffer to hold problem constraint_penalty parameter.

- bool constant_penalty

  Buffer to hold problem constant_penalty parameter.

8.13.1 Detailed Description

Wrapper class for optimizers defined using COLIN.

The COLINOptimizer class wraps COLIN, a Sandia-developed C++ optimization interface library. A variety of COLIN optimizers are defined in COLIN and its associated libraries, including SCOLIB which contains the

optimization components from the old COLINY (formerly SGOPT) library. COLIN contains optimizers such as genetic algorithms, pattern search methods, and other nongradient-based techniques. COLINOptimizer uses a COLINApplication object to perform the function evaluations.

The user input mappings are as follows: `max_iterations`, `max_function_evaluations`, `convergence_tolerance`, and `solution_accuracy` are mapped into COLIN's `max_iterations`, `max_function_evaluations_this_trial`, `function_value_tolerance`, `sufficient_objective_value` properties. An `outputLevel` is mapped to COLIN's `output_level` property and a setting of `debug` activates output of method initialization and sets the COLIN `debug` attribute to 10000 for the DEBUG output level. Refer to [Hart, W.E., 2006] for additional information on COLIN objects and controls.

8.13.2 Member Function Documentation

8.13.2.1 void find_optimum () [virtual]

iterates the COLIN solver to determine the optimal solution

find_optimum redefines the Optimizer virtual function to perform the optimization using COLIN. It first sets up the problem data, then executes optimize() on the COLIN solver and finally catalogues the results.

Implements Optimizer.

8.13.2.2 void post_run (std::ostream & *s*) [protected, virtual]

function value

This overrides Optimizer::post_run(). Do this because we need to unscale variables in order to look responses up in the database.

Reimplemented from Optimizer.

The documentation for this class was generated from the following files:

- COLINOptimizer.H
- COLINOptimizer.C

8.14 CollaborativeHybridStrategy Class Reference

optimization and nonlinear least squares methods.

Inheritance diagram for CollaborativeHybridStrategy::



Public Member Functions

- CollaborativeHybridStrategy (ProblemDescDB &problem_db)
  constructor
- ~CollaborativeHybridStrategy ()
  destructor

Protected Member Functions

- void run_strategy ()
  Performs the collaborative hybrid minimization strategy.
- const Variables & variables_results () const
  return the final solution from the collaborative minimization (variables)
- const Response & response_results () const
  return the final solution from the collaborative minimization (response)

Private Attributes

- String hybridCollabType
  abo or hops
- Variables bestVariables
  best variables found in minimization
- Response bestResponse
  best response found in minimization

8.14.1 Detailed Description

optimization and nonlinear least squares methods.

This strategy has two approaches to hybrid minimization: (1) agent-based using the ABO framework; (2) nonagent-based using the HOPSPACK framework.

The documentation for this class was generated from the following files:

- CollaborativeHybridStrategy.H
- CollaborativeHybridStrategy.C

8.15 CommandLineHandler Class Reference

Utility class for managing command line inputs to DAKOTA.

Inheritance diagram for CommandLineHandler::



Public Member Functions

- CommandLineHandler ()

  default constructor, requires check_usage() call for parsing

- CommandLineHandler (int argc, char **argv)

  constructor with parsing

- ~CommandLineHandler ()

  destructor

- void check_usage (int argc, char **argv)

  Prints a descriptive message and exits the program if incorrect.

- int read_restart_evals () const

  instead of a const char.*

- bool instantiate_flag () const

  Whether command line args dictate instantiation of objects for run.

Private Member Functions

- void initialize_options ()

  enrolls the supported command line inputs.

- void output_version (std::ostream &s) const

  outputs the DAKOTA version

8.15.1 Detailed Description

Utility class for managing command line inputs to DAKOTA.

CommandLineHandler provides additional functionality that is specific to DAKOTA's needs for the definition and parsing of command line options. Inheritance is used to allow the class to have all the functionality of the base class, GetLongOpt.

8.15.2 Member Function Documentation

8.15.2.1 bool instantiate_flag () const [inline]

Whether command line args dictate instantiation of objects for run.

Instantiate objects if not just getting help or version

The documentation for this class was generated from the following files:

- CommandLineHandler.H
- CommandLineHandler.C

8.16 CommandShell Class Reference

processes with system calls.

Public Member Functions

- CommandShell ()

  constructor

- ~CommandShell ()

  destructor

- CommandShell & operator<< (const char *cmd)

  convenient operator: appends string to the commandString to be executed

- CommandShell & operator<< (const std::string &cmd)

  convenient operator: appends string to the commandString to be executed

- CommandShell & operator<< (CommandShell &(*f)(CommandShell &))

  convenience operator: allows passing of the flush func to the shell via <<

- CommandShell & flush ()

  "flushes" the shell; i.e. executes the sysCommand

- void asynch_flag (const bool flag)

  set the asynchFlag

- bool asynch_flag () const

  get the asynchFlag

- void suppress_output_flag (const bool flag)

  set the suppressOutputFlag

- bool suppress_output_flag () const

  get the suppressOutputFlag

Public Attributes

- const char * workDir

  To convey working directory when useWorkdir is true:.

Private Attributes

- std::string sysCommand

  insertions and then executed by flush

- bool asynchFlag

  flags nonblocking operation (background system calls)

- bool suppressOutputFlag

  flags suppression of shell output (no command echo)

8.16.1 Detailed Description

processes with system calls.

The CommandShell class wraps the C system() utility and defines convenience operators for building a command string and then passing it to the shell.

8.16.2 Member Function Documentation

8.16.2.1 CommandShell & flush ()

"flushes" the shell; i.e. executes the sysCommand

Executes the sysCommand by passing it to system(). Appends an "&" if asynchFlag is set (background system call) and echos the sysCommand to Cout if suppressOutputFlag is not set.

The documentation for this class was generated from the following files:

- CommandShell.H
- CommandShell.C

8.17 ConcurrentStrategy Class Reference

Strategy for multi-start iteration or pareto set optimization.

Inheritance diagram for ConcurrentStrategy::



Public Member Functions

- ConcurrentStrategy (ProblemDescDB &problem_db)

  constructor

- ~ConcurrentStrategy ()

  destructor

Protected Member Functions

- void run_strategy ()

  settings within the iterator or model.

- void initialize_iterator (int job_index)

  scheduling function (serve_iterators() or static_schedule_iterators())

- void pack_parameters_buffer (MPIPackBuffer &send_buffer, int job_index)

  pack a send_buffer for assigning an iterator job to a server

- void unpack_parameters_buffer (MPIUnpackBuffer &recv_buffer)

  unpack a recv_buffer for accepting an iterator job from the scheduler

- void pack_results_buffer (MPIPackBuffer &send_buffer, int job_index)

  pack a send_buffer for returning iterator results from a server

- void unpack_results_buffer (MPIUnpackBuffer &recv_buffer, int job_index)

  unpack a recv_buffer for accepting iterator results from a server

- void update_local_results (int job_index)

  update local PRP results arrays with current iteration results

Private Member Functions

- void initialize_iterator (const RealVector &param_set)

  initialize_iterator(int) to update userDefinedModel and selectedIterator

- void print_results () const

  prints the concurrent iteration results summary (called by run_strategy())

Private Attributes

- Model userDefinedModel

  the model used by the iterator

- Iterator selectedIterator

  the iterator used by the concurrent strategy

- bool multiStartFlag

  distinguishes multi-start from Pareto-set

- RealVector initialPt

  point in the Pareto set strategy

- RealVectorArray parameterSets

  be performed.

- PRPArray prpResults

  1-d array of ParamResponsePair results corresponding to numIteratorJobs

8.17.1 Detailed Description

Strategy for multi-start iteration or pareto set optimization.

This strategy maintains two concurrent iterator capabilities. First, a general capability for running an iterator multiple times from different starting points is provided (often used for multi-start optimization, but not restricted to optimization). Second, a simple capability for mapping the "pareto frontier" (the set of optimal solutions in multiobjective formulations) is provided. This pareto set is mapped through running an optimizer multiple times for different sets of multiobjective weightings.

8.17.2 Member Function Documentation

8.17.2.1 void pack_parameters_buffer (MPIPackBuffer & *send_buffer*, int *job_index*) `[inline, protected, virtual]`

pack a send_buffer for assigning an iterator job to a server

This virtual function redefinition is executed on the dedicated master processor for self scheduling. It is not used for peer partitions.

Reimplemented from Strategy.

8.17.2.2 void unpack_parameters_buffer (MPIUnpackBuffer & *recv_buffer*) [inline, protected, virtual]

unpack a recv_buffer for accepting an iterator job from the scheduler

This virtual function redefinition is executed on an iterator server for dedicated master self scheduling. It is not used for peer partitions.

Reimplemented from Strategy.

8.17.2.3 void pack_results_buffer (MPIPackBuffer & *send_buffer*, int *job_index*) [inline, protected, virtual]

pack a send_buffer for returning iterator results from a server

This virtual function redefinition is executed either on an iterator server for dedicated master self scheduling or on peers 2 through n for static scheduling.

Reimplemented from Strategy.

8.17.2.4 void unpack_results_buffer (MPIUnpackBuffer & *recv_buffer*, int *job_index*) [inline, protected, virtual]

unpack a recv_buffer for accepting iterator results from a server

This virtual function redefinition is executed on an strategy master (either the dedicated master processor for self scheduling or peer 1 for static scheduling).

Reimplemented from Strategy.

The documentation for this class was generated from the following files:

- ConcurrentStrategy.H
- ConcurrentStrategy.C

8.18 CONMINOptimizer Class Reference

Wrapper class for the CONMIN optimization library.

Inheritance diagram for CONMINOptimizer::



Public Member Functions

- CONMINOptimizer (Model &model)

  standard constructor

- CONMINOptimizer (NoDBBaseConstructor, Model &model)

  alternate constructor

- ~CONMINOptimizer ()

  destructor

- void find_optimum ()

  Redefines the run virtual function for the optimizer branch.

Protected Member Functions

- void initialize_run ()

  performs run-time set up

Private Member Functions

- void initialize ()

  Shared constructor code.

- void allocate_workspace ()

  Allocates workspace for the optimizer.

- void deallocate_workspace ()

  Releases workspace memory.

- void allocate_constraints ()

  Allocates constraint mappings.

Private Attributes

- int conminInfo

  INFO from CONMIN manual.

- int printControl

  IPRINT from CONMIN manual (controls output verbosity).

- int optimizationType

  MINMAX from DOT manual (minimize or maximize).

- Real objFnValue

  value of the objective function passed to CONMIN

- RealVector constraintValues

  array of nonlinear constraint values passed to CONMIN

- int numConminNlnConstr

  total number of nonlinear constraints seen by CONMIN

- int numConminLinConstr

  total number of linear constraints seen by CONMIN

- int numConminConstr

  total number of linear and nonlinear constraints seen by CONMIN

- SizetArray constraintMappingIndices

  Response constraints used in computing the CONMIN constraints.

- RealArray constraintMappingMultipliers

  the CONMIN constraints.

- RealArray constraintMappingOffsets

  CONMIN constraints.

- int N1

  Size variable for CONMIN arrays. See CONMIN manual.

- int N2

  Size variable for CONMIN arrays. See CONMIN manual.

- int N3

  Size variable for CONMIN arrays. See CONMIN manual.

- int N4

  Size variable for CONMIN arrays. See CONMIN manual.

- int N5

  Size variable for CONMIN arrays. See CONMIN manual.

- int NFDG

  Finite difference flag.

- int IPRINT

  Flag to control amount of output data.

- int ITMAX

  Flag to specify the maximum number of iterations.

- double FDCH

  Relative finite difference step size.

- double FDCHM

  Absolute finite difference step size.

- double CT

  Constraint thickness parameter.

- double CTMIN

  Minimum absolute value of CT used during optimization.

- double CTL

  Constraint thickness parameter for linear and side constraints.

- double CTLMIN

  Minimum value of CTL used during optimization.

- double DELFUN

  Relative convergence criterion threshold.

- double DABFUN

  Absolute convergence criterion threshold.

- double * conminDesVars

Array of design variables used by CONMIN (length N1 = numdv+2).

- double * conminLowerBnds

  Array of lower bounds used by CONMIN (length N1 = numdv+2).

- double * conminUpperBnds

  Array of upper bounds used by CONMIN (length N1 = numdv+2).

- double * S

  Internal CONMIN array.

- double * G1

  Internal CONMIN array.

- double * G2

  Internal CONMIN array.

- double * B

  Internal CONMIN array.

- double * C

  Internal CONMIN array.

- int * MS1

  Internal CONMIN array.

- double * SCAL

  Internal CONMIN array.

- double * DF

  Internal CONMIN array.

- double * A

  Internal CONMIN array.

- int * ISC

  Internal CONMIN array.

- int * IC

  Internal CONMIN array.

8.18.1 Detailed Description

Wrapper class for the CONMIN optimization library.

The CONMINOptimizer class provides a wrapper for CONMIN, a Public-domain Fortran 77 optimization library written by Gary Vanderplaats under contract to NASA Ames Research Center. The CONMIN User's Manual is contained in NASA Technical Memorandum X-62282, 1978. CONMIN uses a reverse communication mode, which avoids the static member function issues that arise with function pointer designs (see NPSOLOptimizer and SNLLOptimizer).

The user input mappings are as follows: `max_iterations` is mapped into CONMIN's `ITMAX` parameter, `max_function_evaluations` is implemented directly in the find_optimum() loop since there is no CONMIN parameter equivalent, `convergence_tolerance` is mapped into CONMIN's `DELFUN` and `DABFUN` parameters, `output` verbosity is mapped into CONMIN's `IPRINT` parameter (verbose: `IPRINT` = 4; quiet: `IPRINT` = 2), gradient mode is mapped into CONMIN's `NFDG` parameter, and finite difference step size is mapped into CONMIN's `FDCH` and `FDCHM` parameters. Refer to [Vanderplaats, 1978] for additional information on CONMIN parameters.

8.18.2 Member Data Documentation

8.18.2.1 int conminInfo [private]

INFO from CONMIN manual.

Information requested by CONMIN: 1 = evaluate objective and constraints, 2 = evaluate gradients of objective and constraints.

8.18.2.2 int printControl [private]

IPRINT from CONMIN manual (controls output verbosity).

Values range from 0 (nothing) to 4 (most output). 0 = nothing, 1 = initial and final function information, 2 = all of #1 plus function value and design vars at each iteration, 3 = all of #2 plus constraint values and direction vectors, 4 = all of #3 plus gradients of the objective function and constraints, 5 = all of #4 plus proposed design vector, plus objective and constraint functions from the 1-D search

8.18.2.3 int optimizationType [private]

MINMAX from DOT manual (minimize or maximize).

Values of 0 or -1 (minimize) or 1 (maximize).

8.18.2.4 RealVector constraintValues [private]

array of nonlinear constraint values passed to CONMIN

This array must be of nonzero length and must contain only one-sided inequality constraints which are <= 0 (which requires a transformation from 2-sided inequalities and equalities).

8.18.2.5 SizetArray constraintMappingIndices [private]

Response constraints used in computing the CONMIN constraints.

The length of the container corresponds to the number of CONMIN constraints, and each entry in the container points to the corresponding DAKOTA constraint.

8.18.2.6 RealArray constraintMappingMultipliers [private]

the CONMIN constraints.

The length of the container corresponds to the number of CONMIN constraints, and each entry in the container stores a multiplier for the DAKOTA constraint identified with constraintMappingIndices. These multipliers are currently +1 or -1.

8.18.2.7 RealArray constraintMappingOffsets [private]

CONMIN constraints.

The length of the container corresponds to the number of CONMIN constraints, and each entry in the container stores an offset for the DAKOTA constraint identified with constraintMappingIndices. These offsets involve inequality bounds or equality targets, since CONMIN assumes constraint allowables = 0.

8.18.2.8 int N1 [private]

Size variable for CONMIN arrays. See CONMIN manual.

N1 = number of variables + 2

8.18.2.9 int N2 [private]

Size variable for CONMIN arrays. See CONMIN manual.

N2 = number of constraints + 2∗(number of variables)

8.18.2.10 int N3 [private]

Size variable for CONMIN arrays. See CONMIN manual.

N3 = Maximum possible number of active constraints.

8.18.2.11 int N4 [private]

Size variable for CONMIN arrays. See CONMIN manual.

N4 = Maximum(N3,number of variables)

8.18.2.12 int N5 [private]

Size variable for CONMIN arrays. See CONMIN manual.

N5 = 2∗(N4)

8.18.2.13 double CT [private]

Constraint thickness parameter.

The value of CT decreases in magnitude during optimization.

8.18.2.14 double∗ S [private]

Internal CONMIN array.

Move direction in N-dimensional space.

8.18.2.15 double∗ G1 [private]

Internal CONMIN array.

Temporary storage of constraint values.

8.18.2.16 double∗ G2 [private]

Internal CONMIN array.

Temporary storage of constraint values.

8.18.2.17 double∗ B [private]

Internal CONMIN array.

Temporary storage for computations involving array S.

8.18.2.18 double∗ C [private]

Internal CONMIN array.

Temporary storage for use with arrays B and S.

8.18.2.19 int∗ MS1 [private]

Internal CONMIN array.

Temporary storage for use with arrays B and S.

8.18.2.20 double* SCAL [private]

Internal CONMIN array.

Vector of scaling parameters for design parameter values.

8.18.2.21 double* DF [private]

Internal CONMIN array.

Temporary storage for analytic gradient data.

8.18.2.22 double* A [private]

Internal CONMIN array.

Temporary 2-D array for storage of constraint gradients.

8.18.2.23 int* ISC [private]

Internal CONMIN array.

Array of flags to identify linear constraints. (not used in this implementation of CONMIN)

8.18.2.24 int* IC [private]

Internal CONMIN array.

Array of flags to identify active and violated constraints

The documentation for this class was generated from the following files:

- CONMINOptimizer.H
- CONMINOptimizer.C

8.19 Constraints Class Reference

Base class for the variable constraints class hierarchy.

Inheritance diagram for Constraints::



Public Member Functions

- Constraints ()
  default constructor
- Constraints (const ProblemDescDB &prob_db, const SharedVariablesData &svd)
  standard constructor
- Constraints (const SharedVariablesData &svd)
  alternate constructor for instantiations on the fly
- Constraints (const Constraints &con)
  copy constructor
- virtual ~Constraints ()
  destructor
- Constraints operator= (const Constraints &con)
  assignment operator
- virtual void write (std::ostream &s) const
  write a variable constraints object to an std::ostream
- virtual void read (std::istream &s)
  read a variable constraints object from an std::istream
- virtual void reshape (const SizetArray &vc_totals)
  reshape the lower/upper bound arrays within the Constraints hierarchy
- const RealVector & continuous_lower_bounds () const
  return the active continuous variable lower bounds
- void continuous_lower_bounds (const RealVector &cl_bnds)
  set the active continuous variable lower bounds

- void continuous_lower_bound (const Real &cl_bnd, const size_t &i)

  set an active continuous variable lower bound

- const RealVector & continuous_upper_bounds () const

  return the active continuous variable upper bounds

- void continuous_upper_bounds (const RealVector &cu_bnds)

  set the active continuous variable upper bounds

- void continuous_upper_bound (const Real &cu_bnd, const size_t &i)

  set an active continuous variable upper bound

- const IntVector & discrete_int_lower_bounds () const

  return the active discrete variable lower bounds

- void discrete_int_lower_bounds (const IntVector &dil_bnds)

  set the active discrete variable lower bounds

- void discrete_int_lower_bound (const int &dil_bnd, const size_t &i)

  set an active discrete variable lower bound

- const IntVector & discrete_int_upper_bounds () const

  return the active discrete variable upper bounds

- void discrete_int_upper_bounds (const IntVector &diu_bnds)

  set the active discrete variable upper bounds

- void discrete_int_upper_bound (const int &diu_bnd, const size_t &i)

  set an active discrete variable upper bound

- const RealVector & discrete_real_lower_bounds () const

  return the active discrete variable lower bounds

- void discrete_real_lower_bounds (const RealVector &drl_bnds)

  set the active discrete variable lower bounds

- void discrete_real_lower_bound (const Real &drl_bnd, const size_t &i)

  set an active discrete variable lower bound

- const RealVector & discrete_real_upper_bounds () const

  return the active discrete variable upper bounds

- void discrete_real_upper_bounds (const RealVector &dru_bnds)

  set the active discrete variable upper bounds

- void discrete_real_upper_bound (const Real &dru_bnd, const size_t &i)
  set an active discrete variable upper bound
- const RealVector & inactive_continuous_lower_bounds () const
  return the inactive continuous lower bounds
- void inactive_continuous_lower_bounds (const RealVector &icl_bnds)
  set the inactive continuous lower bounds
- const RealVector & inactive_continuous_upper_bounds () const
  return the inactive continuous upper bounds
- void inactive_continuous_upper_bounds (const RealVector &icu_bnds)
  set the inactive continuous upper bounds
- const IntVector & inactive_discrete_int_lower_bounds () const
  return the inactive discrete lower bounds
- void inactive_discrete_int_lower_bounds (const IntVector &idil_bnds)
  set the inactive discrete lower bounds
- const IntVector & inactive_discrete_int_upper_bounds () const
  return the inactive discrete upper bounds
- void inactive_discrete_int_upper_bounds (const IntVector &idiu_bnds)
  set the inactive discrete upper bounds
- const RealVector & inactive_discrete_real_lower_bounds () const
  return the inactive discrete lower bounds
- void inactive_discrete_real_lower_bounds (const RealVector &idrl_bnds)
  set the inactive discrete lower bounds
- const RealVector & inactive_discrete_real_upper_bounds () const
  return the inactive discrete upper bounds
- void inactive_discrete_real_upper_bounds (const RealVector &idru_bnds)
  set the inactive discrete upper bounds
- const RealVector & all_continuous_lower_bounds () const
  returns a single array with all continuous lower bounds
- void all_continuous_lower_bounds (const RealVector &acl_bnds)
  sets all continuous lower bounds using a single array
- void all_continuous_lower_bound (const Real &acl_bnd, const size_t &i)

set a lower bound within the all continuous lower bounds array

- const RealVector & all_continuous_upper_bounds () const

  returns a single array with all continuous upper bounds

- void all_continuous_upper_bounds (const RealVector &acu_bnds)

  sets all continuous upper bounds using a single array

- void all_continuous_upper_bound (const Real &acu_bnd, const size_t &i)

  set an upper bound within the all continuous upper bounds array

- const IntVector & all_discrete_int_lower_bounds () const

  returns a single array with all discrete lower bounds

- void all_discrete_int_lower_bounds (const IntVector &adil_bnds)

  sets all discrete lower bounds using a single array

- void all_discrete_int_lower_bound (const int &adil_bnd, const size_t &i)

  set a lower bound within the all discrete lower bounds array

- const IntVector & all_discrete_int_upper_bounds () const

  returns a single array with all discrete upper bounds

- void all_discrete_int_upper_bounds (const IntVector &adiu_bnds)

  sets all discrete upper bounds using a single array

- void all_discrete_int_upper_bound (const int &adiu_bnd, const size_t &i)

  set an upper bound within the all discrete upper bounds array

- const RealVector & all_discrete_real_lower_bounds () const

  returns a single array with all discrete lower bounds

- void all_discrete_real_lower_bounds (const RealVector &adrl_bnds)

  sets all discrete lower bounds using a single array

- void all_discrete_real_lower_bound (const Real &adrl_bnd, const size_t &i)

  set a lower bound within the all discrete lower bounds array

- const RealVector & all_discrete_real_upper_bounds () const

  returns a single array with all discrete upper bounds

- void all_discrete_real_upper_bounds (const RealVector &adru_bnds)

  sets all discrete upper bounds using a single array

- void all_discrete_real_upper_bound (const Real &adru_bnd, const size_t &i)

  set an upper bound within the all discrete upper bounds array

- size_t num_linear_ineq_constraints () const
  return the number of linear inequality constraints
- size_t num_linear_eq_constraints () const
  return the number of linear equality constraints
- const RealMatrix & linear_ineq_constraint_coeffs () const
  return the linear inequality constraint coefficients
- void linear_ineq_constraint_coeffs (const RealMatrix &lin_ineq_coeffs)
  set the linear inequality constraint coefficients
- const RealVector & linear_ineq_constraint_lower_bounds () const
  return the linear inequality constraint lower bounds
- void linear_ineq_constraint_lower_bounds (const RealVector &lin_ineq_l_bnds)
  set the linear inequality constraint lower bounds
- const RealVector & linear_ineq_constraint_upper_bounds () const
  return the linear inequality constraint upper bounds
- void linear_ineq_constraint_upper_bounds (const RealVector &lin_ineq_u_bnds)
  set the linear inequality constraint upper bounds
- const RealMatrix & linear_eq_constraint_coeffs () const
  return the linear equality constraint coefficients
- void linear_eq_constraint_coeffs (const RealMatrix &lin_eq_coeffs)
  set the linear equality constraint coefficients
- const RealVector & linear_eq_constraint_targets () const
  return the linear equality constraint targets
- void linear_eq_constraint_targets (const RealVector &lin_eq_targets)
  set the linear equality constraint targets
- size_t num_nonlinear_ineq_constraints () const
  return the number of nonlinear inequality constraints
- size_t num_nonlinear_eq_constraints () const
  return the number of nonlinear equality constraints
- const RealVector & nonlinear_ineq_constraint_lower_bounds () const
  return the nonlinear inequality constraint lower bounds

- void nonlinear_ineq_constraint_lower_bounds (const RealVector &nln_ineq_l_bnds)

  set the nonlinear inequality constraint lower bounds

- const RealVector & nonlinear_ineq_constraint_upper_bounds () const

  return the nonlinear inequality constraint upper bounds

- void nonlinear_ineq_constraint_upper_bounds (const RealVector &nln_ineq_u_bnds)

  set the nonlinear inequality constraint upper bounds

- const RealVector & nonlinear_eq_constraint_targets () const

  return the nonlinear equality constraint targets

- void nonlinear_eq_constraint_targets (const RealVector &nln_eq_targets)

  set the nonlinear equality constraint targets

- Constraints copy () const

  for use when a deep copy is needed (the representation is _not_ shared)

- void reshape (const size_t &num_nln_ineq_cons, const size_t &num_nln_eq_cons, const size_t &num_-lin_ineq_cons, const size_t &num_lin_eq_cons, const SizetArray &vc_totals)

  Constraints hierarchy.

- void reshape (const size_t &num_nln_ineq_cons, const size_t &num_nln_eq_cons, const size_t &num_-lin_ineq_cons, const size_t &num_lin_eq_cons)

  Constraints hierarchy.

- bool is_null () const

  function to check constraintsRep (does this envelope contain a letter)

Protected Member Functions

- Constraints (BaseConstructor, const ProblemDescDB &problem_db, const SharedVariablesData &svd)

  derived class constructors - Coplien, p. 139)

- Constraints (BaseConstructor, const SharedVariablesData &svd)

  derived class constructors - Coplien, p. 139)

- virtual void build_active_views ()

  construct active views of all variables bounds arrays

- virtual void build_inactive_views ()

  construct inactive views of all variables bounds arrays

- void build_views ()

  construct active/inactive views of all variables arrays

- void manage_linear_constraints (const ProblemDescDB &problem_db)

  coefficient input to matrices, and assign defaults

Protected Attributes

- SharedVariablesData sharedVarsData

  configuration data shared from a Variables instance

- RealVector allContinuousLowerBnds

  uncertain, and continuous state variable types (all view).

- RealVector allContinuousUpperBnds

  uncertain, and continuous state variable types (all view).

- IntVector allDiscreteIntLowerBnds

  discrete state variable types (all view).

- IntVector allDiscreteIntUpperBnds

  discrete state variable types (all view).

- RealVector allDiscreteRealLowerBnds

  discrete state variable types (all view).

- RealVector allDiscreteRealUpperBnds

  discrete state variable types (all view).

- size_t numNonlinearIneqCons

  number of nonlinear inequality constraints

- size_t numNonlinearEqCons

  number of nonlinear equality constraints

- RealVector nonlinearIneqConLowerBnds

  nonlinear inequality constraint lower bounds

- RealVector nonlinearIneqConUpperBnds

  nonlinear inequality constraint upper bounds

- RealVector nonlinearEqConTargets

  nonlinear equality constraint targets

- size_t numLinearIneqCons

  number of linear inequality constraints

- size_t numLinearEqCons

  number of linear equality constraints

- RealMatrix linearIneqConCoeffs

  linear inequality constraint coefficients

- RealMatrix linearEqConCoeffs

  linear equality constraint coefficients

- RealVector linearIneqConLowerBnds

  linear inequality constraint lower bounds

- RealVector linearIneqConUpperBnds

  linear inequality constraint upper bounds

- RealVector linearEqConTargets

  linear equality constraint targets

- RealVector continuousLowerBnds

  the active continuous lower bounds array view

- RealVector continuousUpperBnds

  the active continuous upper bounds array view

- IntVector discreteIntLowerBnds

  the active discrete lower bounds array view

- IntVector discreteIntUpperBnds

  the active discrete upper bounds array view

- RealVector discreteRealLowerBnds

  the active discrete lower bounds array view

- RealVector discreteRealUpperBnds

  the active discrete upper bounds array view

- RealVector inactiveContinuousLowerBnds

  the inactive continuous lower bounds array view

- RealVector inactiveContinuousUpperBnds

  the inactive continuous upper bounds array view

- IntVector inactiveDiscreteIntLowerBnds

  the inactive discrete lower bounds array view

- IntVector inactiveDiscreteIntUpperBnds

the inactive discrete upper bounds array view

- RealVector inactiveDiscreteRealLowerBnds
  the inactive discrete lower bounds array view

- RealVector inactiveDiscreteRealUpperBnds
  the inactive discrete upper bounds array view

Private Member Functions

- Constraints * get_constraints (const ProblemDescDB &problem_db, const SharedVariablesData &svd)
  appropriate derived type.

- Constraints * get_constraints (const SharedVariablesData &svd) const
  derived type.

Private Attributes

- Constraints * constraintsRep
  pointer to the letter (initialized only for the envelope)

- int referenceCount
  number of objects sharing constraintsRep

8.19.1 Detailed Description

Base class for the variable constraints class hierarchy.

The Constraints class is the base class for the class hierarchy managing bound, linear, and nonlinear constraints. Using the variable lower and upper bounds arrays from the input specification, different derived classes define different views of this data. The linear and nonlinear constraint data is consistent in all views and is managed at the base class level. For memory efficiency and enhanced polymorphism, the variable constraints hierarchy employs the "letter/envelope idiom" (see Coplien "Advanced C++", p. 133), for which the base class (Constraints) serves as the envelope and one of the derived classes (selected in Constraints::get_constraints()) serves as the letter.

8.19.2 Constructor & Destructor Documentation

8.19.2.1 Constraints ()

default constructor

The default constructor: constraintsRep is NULL in this case (a populated problem_db is needed to build a meaningful Constraints object). This makes it necessary to check for NULL in the copy constructor, assignment operator, and destructor.

8.19.2.2 Constraints (const ProblemDescDB & *problem_db*, const SharedVariablesData & *svd*)

standard constructor

The envelope constructor only needs to extract enough data to properly execute get_constraints, since the constructor overloaded with BaseConstructor builds the actual base class data inherited by the derived classes.

8.19.2.3 Constraints (const SharedVariablesData & *svd*)

alternate constructor for instantiations on the fly

Envelope constructor for instantiations on the fly. This constructor executes get_constraints(view), which invokes the default derived/base constructors, followed by a reshape() based on vars_comps.

8.19.2.4 Constraints (const Constraints & *con*)

copy constructor

Copy constructor manages sharing of constraintsRep and incrementing of referenceCount.

8.19.2.5 ~Constraints () [virtual]

destructor

Destructor decrements referenceCount and only deletes constraintsRep when referenceCount reaches zero.

8.19.2.6 Constraints (BaseConstructor, const ProblemDescDB & *problem_db*, const SharedVariablesData & *svd*) [protected]

derived class constructors - Coplien, p. 139)

This constructor is the one which must build the base class data for all derived classes. get_constraints() instantiates a derived class letter and the derived constructor selects this base class constructor in its initialization list (to avoid recursion in the base class constructor calling get_constraints() again). Since the letter IS the representation, its rep pointer is set to NULL (an uninitialized pointer causes problems in ~Constraints).

8.19.2.7 Constraints (BaseConstructor, const SharedVariablesData & *svd*) [protected]

derived class constructors - Coplien, p. 139)

This constructor is the one which must build the base class data for all derived classes. get_constraints() instantiates a derived class letter and the derived constructor selects this base class constructor in its initialization list (to avoid recursion in the base class constructor calling get_constraints() again). Since the letter IS the representation, its rep pointer is set to NULL (an uninitialized pointer causes problems in ~Constraints).

8.19.3 Member Function Documentation

8.19.3.1 Constraints operator= (const Constraints & *con*)

assignment operator

Assignment operator decrements referenceCount for old constraintsRep, assigns new constraintsRep, and increments referenceCount for new constraintsRep.

8.19.3.2 void reshape (const SizetArray & *vc_totals*) [virtual]

reshape the lower/upper bound arrays within the Constraints hierarchy

Resizes the derived bounds arrays.

Reimplemented in MergedConstraints, and MixedConstraints.

8.19.3.3 Constraints copy () const

for use when a deep copy is needed (the representation is _not_ shared)

Deep copies are used for history mechanisms that catalogue permanent copies (should not change as the representation within userDefinedConstraints changes).

8.19.3.4 void reshape (const size_t & *num_nln_ineq_cons*, const size_t & *num_nln_eq_cons*, const size_t & *num_lin_ineq_cons*, const size_t & *num_lin_eq_cons*)

Constraints hierarchy.

Resizes the linear and nonlinear constraint arrays at the base class. Does NOT currently resize the derived bounds arrays.

8.19.3.5 void build_views () [inline, protected]

construct active/inactive views of all variables arrays

= EMPTY)

= EMPTY)

8.19.3.6 void manage_linear_constraints (const ProblemDescDB & *problem_db*) [protected]

coefficient input to matrices, and assign defaults

Convenience function called from derived class constructors. The number of variables active for applying linear constraints is currently defined to be the number of active continuous variables plus the number of active discrete variables (the most general case), even though very few optimizers can currently support mixed variable linear constraints.

8.19.3.7 Constraints * get_constraints (const ProblemDescDB & *problem_db*, const SharedVariablesData & *svd*) [private]

appropriate derived type.

Initializes constraintsRep to the appropriate derived type, as given by the variables view.

8.19.3.8 Constraints * get_constraints (const SharedVariablesData & *svd*) const [private]

derived type.

Initializes constraintsRep to the appropriate derived type, as given by the variables view. The default derived class constructors are invoked.

The documentation for this class was generated from the following files:

- DakotaConstraints.H
- DakotaConstraints.C

8.20 CtelRegexp Class Reference

Public Types

- enum RStatus {
  GOOD = 0, EXP_TOO_BIG, OUT_OF_MEM, TOO_MANY_PAR,
  UNMATCH_PAR, STARPLUS_EMPTY, STARPLUS_NESTED, INDEX_RANGE,
  INDEX_MATCH, STARPLUS_NOTHING, TRAILING, INT_ERROR,
  BAD_PARAM, BAD_OPCODE }

  occurs with this implementation.

Public Member Functions

- CtelRegexp (const std::string &pattern)

  Constructor - compile a regular expression.

- ~CtelRegexp ()

  Destructor.

- bool compile (const std::string &pattern)

  Compile a new regular expression.

- std::string match (const std::string &str)

  that is a sub-string matching with the regular expression

- bool match (const std::string &str, size_t *start, size_t *size)

  another form of matching; returns the indexes of the maching

- RStatus getStatus ()

  Get status.

- const std::string & getStatusMsg ()

  Get status message.

- void clearErrors ()

  Clear all errors.

- const std::string & getRe ()

  Return regular expression pattern.

- bool split (const std::string &str, std::vector< std::string > &all_matches)

  Split.

Private Member Functions

- CtelRegexp (const CtelRegexp &)

  Private copy constructor.

- CtelRegexp & operator= (const CtelRegexp &)

  Private assignment operator.

Private Attributes

- std::string strPattern

  STL string to hold pattern.

- regexp * r

  Pointer to regexp.

- RStatus status

  Return status, enumerated type.

- std::string statusMsg

  STL string to hold status message.

8.20.1 Detailed Description

DESCRIPTION: Wrapper for the Regular Expression engine(regexp) released by Henry Spencer of the University of Toronto.

8.20.2 Member Enumeration Documentation

8.20.2.1 enum RStatus

occurs with this implementation.

Enumerator:

GOOD Success - no errors.

EXP_TOO_BIG Regular expression is too big to be compiled.

OUT_OF_MEM out of space(memory)

TOO_MANY_PAR too many () parenteses

UNMATCH_PAR unmatched () parenteses

STARPLUS_EMPTY *+ operand could be empty

STARPLUS_NESTED nested *?

INDEX_RANGE invalid [] range

INDEX_MATCH unmatched []

STARPLUS_NOTHING ?+∗ follows nothing

TRAILING trailing \"

INT_ERROR junk on end, "internal urp", "internal disaster"

BAD_PARAM NULL parameter.

BAD_OPCODE corrupted opcode

The documentation for this class was generated from the following files:

- CtelRegExp.H
- CtelRegExp.C

8.21 DataFitSurrModel Class Reference

data fit surrogates (global and local)

Inheritance diagram for DataFitSurrModel::



Public Member Functions

- DataFitSurrModel (ProblemDescDB &problem_db)

  constructor

- DataFitSurrModel (Iterator &dace_iterator, Model &actual_model, const String &approx_type, const UShortArray &approx_order, const String &corr_type, short corr_order, const String &point_reuse)

  alternate constructor for instantiations on the fly

- ~DataFitSurrModel ()

  destructor

Protected Member Functions

- void derived_compute_response (const ActiveSet &set)

  portion of compute_response() specific to DataFitSurrModel

- void derived_asynch_compute_response (const ActiveSet &set)

  portion of asynch_compute_response() specific to DataFitSurrModel

- const IntResponseMap & derived_synchronize ()

  portion of synchronize() specific to DataFitSurrModel

- const IntResponseMap & derived_synchronize_nowait ()

  portion of synchronize_nowait() specific to DataFitSurrModel

- Iterator & subordinate_iterator ()

  return daceIterator

- Model & surrogate_model ()

return this model instance

- Model & truth_model ()

  return actualModel

- void derived_subordinate_models (ModelList &ml, bool recurse_flag)

  return actualModel (and optionally its sub-models)

- void update_from_subordinate_model (bool recurse_flag=true)

  pass request to actualModel if recursing and then update from it

- Interface & interface ()

  return approxInterface

- void primary_response_fn_weights (const RealVector &wts, bool recurse_flag=true)

  squares terms and optionally recurses into actualModel

- void surrogate_bypass (bool bypass_flag)

  any lower-level surrogates.

- void surrogate_function_indices (const IntSet &surr_fn_indices)

  and ApproximationInterface::approxFnIndices

- void build_approximation ()

  daceIterator/actualModel to generate new data points

- bool build_approximation (const Variables &vars, const Response &response)

  augment the vars/response anchor point

- void update_approximation (bool rebuild_flag)

  if requested

- void update_approximation (const Variables &vars, const Response &response, bool rebuild_flag)

  replaces the anchor point, and rebuilds the approximation if requested

- void update_approximation (const VariablesArray &vars_array, const ResponseArray &resp_array, bool rebuild_flag)

  if requested

- void append_approximation (bool rebuild_flag)

  appends data to a global approximation and rebuilds it if requested

- void append_approximation (const Variables &vars, const Response &response, bool rebuild_flag)

  appends a point to a global approximation and rebuilds it if requested

- void append_approximation (const VariablesArray &vars_array, const ResponseArray &resp_array, bool rebuild_flag)

if requested

- void pop_approximation (bool save_sdp_set)

  remove approximation data added on previous append_approximation() call

- void restore_approximation ()

  restore a previous approximation data state

- bool restore_available ()

  query for whether a trial increment is restorable

- void finalize_approximation ()

  finalize data fit by applying all previous trial increments

- std::vector< Approximation > & approximations ()

  retrieve the set of Approximations from approxInterface

- const RealVectorArray & approximation_coefficients ()

  (request forwarded to approxInterface)

- void approximation_coefficients (const RealVectorArray &approx_coeffs)

  (request forwarded to approxInterface)

- const RealVector & approximation_variances (const RealVector &c_vars)

  (request forwarded to approxInterface)

- const SDPList & approximation_data (size_t index)

  (request forwarded to approxInterface)

- void component_parallel_mode (short mode)

  update component parallel mode for supporting parallelism in actualModel

- void derived_init_communicators (const int &max_iterator_concurrency, bool recurse_flag=true)

  set up actualModel for parallel operations

- void derived_init_serial ()

  set up actualModel for serial operations.

- void derived_set_communicators (const int &max_iterator_concurrency, bool recurse_flag=true)

  set active parallel configuration within actualModel

- void derived_free_communicators (const int &max_iterator_concurrency, bool recurse_flag=true)

  (request forwarded to actualModel)

- void serve ()

  Completes when a termination message is received from stop_servers().

- void stop_servers ()

  when DataFitSurrModel iteration is complete.

- void inactive_view (short view, bool recurse_flag=true)

  context and optionally recurse into actualModel

- const String & interface_id () const

  return the approxInterface identifier

- int evaluation_id () const

  return the current evaluation id for the DataFitSurrModel

- void set_evaluation_reference ()

  (request forwarded to approxInterface and actualModel)

- void fine_grained_evaluation_counters ()

  and actualModel

- void print_evaluation_summary (std::ostream &s, bool minimal_header=false, bool relative_count=true) const

  (request forwarded to approxInterface and actualModel)

Private Member Functions

- void derived_synchronize_approx (const IntResponseMap &approx_resp_map, IntResponseMap &approx_resp_map_rekey)

  derived_synchronize() and derived_synchronize_nowait()

- void update_global ()

  Updates fit arrays for global approximations.

- void update_local_multipoint ()

  Updates fit arrays for local or multipoint approximations.

- void build_global ()

  Builds a global approximation using daceIterator.

- void build_local_multipoint ()

  Builds a local or multipoint approximation using actualModel.

- void update_actual_model ()

  update actualModel with data from current variables/labels/bounds/targets

- void update_from_actual_model ()

update current variables/labels/bounds/targets with data from actualModel

- bool inside (const RealVector &c_vars, const IntVector &di_vars, const RealVector &dr_vars)

  [d_l_bnds,d_u_bnds]

Private Attributes

- int surrModelEvals

  derived_asynch_compute_response()

- int pointsTotal

  total points the user specified to construct the surrogate

- bool pointsMinimum

  user wishes to use minimum points to construct the surrogate

- bool pointsRecommended

  user wishes to use recommended points to construct the surrogate

- String pointReuse

  (default if points file), or `none` *(default if no points file)*

- String pointReuseFile

  file name for `points_file` *specification*

- VariablesList reuseFileVars

  array of variables sets read from the `points_file`

- ResponseList reuseFileResponses

  array of response sets read from the `points_file`

- Interface approxInterface

  (required for both global and local)

- Model actualModel

  (optional for global, required for local)

- Iterator daceIterator

  (optional for global since restart data may also be used)

8.21.1 Detailed Description

data fit surrogates (global and local)

The DataFitSurrModel class manages global or local approximations (surrogates that involve data fits) that are used in place of an expensive model. The class contains an approxInterface (required for both global and local) which manages the approximate function evaluations, an actualModel (optional for global, required for local) which provides truth evaluations for building the surrogate, and a daceIterator (optional for global, not used for local) which selects parameter sets on which to evaluate actualModel in order to generate the necessary data for building global approximations.

8.21.2 Member Function Documentation

8.21.2.1 void derived_compute_response (const ActiveSet & *set*) [protected, virtual]

portion of compute_response() specific to DataFitSurrModel

Compute the response synchronously using actualModel, approxInterface, or both (mixed case). For the approxInterface portion, build the approximation if needed, evaluate the approximate response, and apply correction (if active) to the results.

Reimplemented from Model.

8.21.2.2 void derived_asynch_compute_response (const ActiveSet & *set*) [protected, virtual]

portion of asynch_compute_response() specific to DataFitSurrModel

Compute the response asynchronously using actualModel, approxInterface, or both (mixed case). For the approxInterface portion, build the approximation if needed and evaluate the approximate response in a quasi-asynchronous approach (ApproximationInterface::map() performs the map synchronously and bookkeeps the results for return in derived_synchronize() below).

Reimplemented from Model.

8.21.2.3 const IntResponseMap & derived_synchronize () [protected, virtual]

portion of synchronize() specific to DataFitSurrModel

Blocking retrieval of asynchronous evaluations from actualModel, approxInterface, or both (mixed case). For the approxInterface portion, apply correction (if active) to each response in the array. derived_synchronize() is designed for the general case where derived_asynch_compute_response() may be inconsistent in its use of actual evaluations, approximate evaluations, or both.

Reimplemented from Model.

8.21.2.4 const IntResponseMap & derived_synchronize_nowait () [protected, virtual]

portion of synchronize_nowait() specific to DataFitSurrModel

Nonblocking retrieval of asynchronous evaluations from actualModel, approxInterface, or both (mixed case). For the approxInterface portion, apply correction (if active) to each response in the map. derived_synchronize_-

nowait() is designed for the general case where derived_asynch_compute_response() may be inconsistent in its use of actual evals, approx evals, or both.

Reimplemented from Model.

8.21.2.5 void build_approximation () [protected, virtual]

daceIterator/actualModel to generate new data points

This function constructs a new approximation, discarding any previous data. It constructs any required currentPoints and does not define an anchorPoint.

Reimplemented from Model.

8.21.2.6 bool build_approximation (const Variables & *vars*, const Response & *response*) [protected, virtual]

augment the vars/response anchor point

This function constructs a new approximation, discarding any previous data. It uses the passed data to populate the anchorPoint and constructs any required currentPoints.

Reimplemented from Model.

8.21.2.7 void update_approximation (bool *rebuild_flag*) [protected, virtual]

if requested

This function populates/replaces Approximation::anchorPoint and rebuilds the approximation, if requested. It does not clear other data (i.e., Approximation::currentPoints) and does not update the actualModel with revised bounds, labels, etc. Thus, it updates data from a previous call to build_approximation(), and is not intended to be used in isolation.

Reimplemented from Model.

8.21.2.8 void update_approximation (const Variables & *vars*, const Response & *response*, bool *rebuild_flag*) [protected, virtual]

replaces the anchor point, and rebuilds the approximation if requested

This function populates/replaces Approximation::anchorPoint and rebuilds the approximation, if requested. It does not clear other data (i.e., Approximation::currentPoints) and does not update the actualModel with revised bounds, labels, etc. Thus, it updates data from a previous call to build_approximation(), and is not intended to be used in isolation.

Reimplemented from Model.

8.21.2.9 void update_approximation (const VariablesArray & *vars_array*, const ResponseArray & *resp_array*, bool *rebuild_flag*) [protected, virtual]

if requested

This function populates/replaces Approximation::currentPoints and rebuilds the approximation, if requested. It does not clear other data (i.e., Approximation::anchorPoint) and does not update the actualModel with revised bounds, labels, etc. Thus, it updates data from a previous call to build_approximation(), and is not intended to be used in isolation.

Reimplemented from Model.

8.21.2.10 void append_approximation (bool *rebuild_flag*) [protected, virtual]

appends data to a global approximation and rebuilds it if requested

This function appends one point to Approximation::currentPoints and rebuilds the approximation, if requested. It does not modify other data (i.e., Approximation::anchorPoint) and does not update the actualModel with revised bounds, labels, etc. Thus, it appends to data from a previous call to build_approximation(), and is not intended to be used in isolation.

Reimplemented from Model.

8.21.2.11 void append_approximation (const Variables & *vars*, const Response & *response*, bool *rebuild_flag*) [protected, virtual]

appends a point to a global approximation and rebuilds it if requested

This function appends one point to Approximation::currentPoints and rebuilds the approximation, if requested. It does not modify other data (i.e., Approximation::anchorPoint) and does not update the actualModel with revised bounds, labels, etc. Thus, it appends to data from a previous call to build_approximation(), and is not intended to be used in isolation.

Reimplemented from Model.

8.21.2.12 void append_approximation (const VariablesArray & *vars_array*, const ResponseArray & *resp_array*, bool *rebuild_flag*) [protected, virtual]

if requested

This function appends multiple points to Approximation::currentPoints and rebuilds the approximation, if requested. It does not modify other data (i.e., Approximation::anchorPoint) and does not update the actualModel with revised bounds, labels, etc. Thus, it appends to data from a previous call to build_approximation(), and is not intended to be used in isolation.

Reimplemented from Model.

8.21.2.13 void derived_init_communicators (const int & *max_iterator_concurrency*, bool *recurse_flag* = true) [inline, protected, virtual]

set up actualModel for parallel operations

asynchronous flags need to be initialized for the sub-models. In addition, max_iterator_concurrency is the outer level iterator concurrency, not the DACE concurrency that actualModel will see, and recomputing the message_-lengths on the sub-model is probably not a bad idea either. Therefore, recompute everything on actualModel using init_communicators.

Reimplemented from Model.

8.21.2.14 int evaluation_id () const [inline, protected, virtual]

return the current evaluation id for the DataFitSurrModel

return the DataFitSurrModel evaluation count. Due to possibly intermittent use of surrogate bypass, this is not the same as either the approxInterface or actualModel model evaluation counts. It also does not distinguish duplicate evals.

Reimplemented from Model.

8.21.2.15 void build_global () [private]

Builds a global approximation using daceIterator.

Determine points to use in building the approximation and then evaluate them on actualModel using daceIterator. Any changes to the bounds should be performed by setting them at a higher level (e.g., SurrBasedOptStrategy).

8.21.2.16 void build_local_multipoint () [private]

Builds a local or multipoint approximation using actualModel.

Evaluate the value, gradient, and possibly Hessian needed for a local or multipoint approximation using actualModel.

8.21.2.17 void update_actual_model () [private]

update actualModel with data from current variables/labels/bounds/targets

Update variables and constraints data within actualModel using values and labels from currentVariables and bound/linear/nonlinear constraints from userDefinedConstraints.

8.21.2.18 void update_from_actual_model () [private]

update current variables/labels/bounds/targets with data from actualModel

Update values and labels in currentVariables and bound/linear/nonlinear constraints in userDefinedConstraints from variables and constraints data within actualModel.

8.21.3 Member Data Documentation

8.21.3.1 Model actualModel [private]

(optional for global, required for local)

actualModel is unrestricted in type; arbitrary nestings are possible.

The documentation for this class was generated from the following files:

- DataFitSurrModel.H
- DataFitSurrModel.C

8.22 DataInterface Class Reference

Handle class for interface specification data.

Public Member Functions

- DataInterface ()
  constructor
- DataInterface (const DataInterface &)
  copy constructor
- ~DataInterface ()
  destructor
- DataInterface & operator= (const DataInterface &)
  assignment operator
- void write (std::ostream &s) const
  write a DataInterface object to an std::ostream
- void read (MPIUnpackBuffer &s)
  read a DataInterface object from a packed MPI buffer
- void write (MPIPackBuffer &s) const
  write a DataInterface object to a packed MPI buffer

Static Public Member Functions

- static bool **id_compare** (const DataInterface &di, const std::string &id)

Private Attributes

- DataInterfaceRep * dataIfaceRep
  pointer to the body (handle-body idiom)

Friends

- class **ProblemDescDB**
- class **NIDRProblemDescDB**
- void run_dakota_data ()
  mode 2: direct Data class instantiation.

8.22.1 Detailed Description

Handle class for interface specification data.

The DataInterface class is used to provide a memory management handle for the data in DataInterfaceRep. It is populated by IDRProblemDescDB::interface_kwhandler() and is queried by the ProblemDescDB::get_-<datatype>() functions. A list of DataInterface objects is maintained in ProblemDescDB::dataInterfaceList, one for each interface specification in an input file.

8.22.2 Friends And Related Function Documentation

8.22.2.1 void run_dakota_data () [friend]

mode 2: direct Data class instantiation.

Rather than parsing from an input file, this function populates Data class objects directly using a minimal specification and relies on constructor defaults and post-processing in post_process() to fill in the rest.

The documentation for this class was generated from the following files:

- DataInterface.H
- DataInterface.C

8.23 DataMethod Class Reference

Handle class for method specification data.

Public Member Functions

- DataMethod ()
  constructor
- DataMethod (const DataMethod &)
  copy constructor
- ~DataMethod ()
  destructor
- DataMethod & operator= (const DataMethod &)
  assignment operator
- void write (std::ostream &s) const
  write a DataMethod object to an std::ostream
- void read (MPIUnpackBuffer &s)
  read a DataMethod object from a packed MPI buffer
- void write (MPIPackBuffer &s) const
  write a DataMethod object to a packed MPI buffer

Static Public Member Functions

- static bool **id_compare** (const DataMethod &dm, const std::string &id)

Private Attributes

- DataMethodRep * dataMethodRep
  pointer to the body (handle-body idiom)

Friends

- class **ProblemDescDB**
- class **NIDRProblemDescDB**
- void run_dakota_data ()
  mode 2: direct Data class instantiation.

8.23.1 Detailed Description

Handle class for method specification data.

The DataMethod class is used to provide a memory management handle for the data in DataMethodRep. It is populated by IDRProblemDescDB::method_kwhandler() and is queried by the ProblemDescDB::get_<datatype>() functions. A list of DataMethod objects is maintained in ProblemDescDB::dataMethodList, one for each method specification in an input file.

8.23.2 Friends And Related Function Documentation

8.23.2.1 void run_dakota_data () [friend]

mode 2: direct Data class instantiation.

Rather than parsing from an input file, this function populates Data class objects directly using a minimal specification and relies on constructor defaults and post-processing in post_process() to fill in the rest.

The documentation for this class was generated from the following files:

- DataMethod.H
- DataMethod.C

8.24 DataMethodRep Class Reference

Body class for method specification data.

Public Attributes

- String idMethod

  the `id_method` *specification in* **MethodIndControl***)*

- String modelPointer

  (from the `model_pointer` *specification in* **MethodIndControl***)*

- short methodOutput

  (from the `output` *specification in* **MethodIndControl***)*

- int maxIterations

  max_iterations specification in **MethodIndControl***)*

- int maxFunctionEvaluations

  the `max_function_evaluations` *specification in* **MethodIndControl***)*

- bool speculativeFlag

  (from the `speculative` *specification in* **MethodIndControl***)*

- Real convergenceTolerance

  convergence_tolerance specification in **MethodIndControl***)*

- Real constraintTolerance

  constraint_tolerance specification in **MethodIndControl***)*

- bool methodScaling

  MethodIndControl*)*

- size_t numFinalSolutions

  number of final solutions returned from the iterator

- RealVector linearIneqConstraintCoeffs

  MethodIndControl).

- RealVector linearIneqLowerBnds

  linear_inequality_lower_bounds specification in **MethodIndControl***)*

- RealVector linearIneqUpperBnds

  linear_inequality_upper_bounds specification in **MethodIndControl***)*

- StringArray linearIneqScaleTypes

  linear_inequality_scale_types specification in **MethodIndControl***)*

- RealVector linearIneqScales

  linear_inequality_scales specification in **MethodIndControl***)*

- RealVector linearEqConstraintCoeffs

  MethodIndControl).

- RealVector linearEqTargets

  linear_equality_targets specification in **MethodIndControl***)*

- StringArray linearEqScaleTypes

  linear_equality_scale_types specification in **MethodIndControl***)*

- RealVector linearEqScales

  linear_equality_scales specification in **MethodIndControl***)*

- String methodName

  or parameter study methods

- String subMethodName

  option, or `richardson_extrap` *option)*

- String subMethodPointer

  method (from the `sub_method_pointer` *specification in SBL/SBG)*

- int surrBasedLocalSoftConvLimit

  soft_convergence_limit specification in **MethodSBL***)*

- bool surrBasedLocalLayerBypass

  layerings in evaluating truth response values in SBL.

- Real surrBasedLocalTRInitSize

  distance (upper bound - lower bound) for each variable

- Real surrBasedLocalTRMinSize

  regions)

- Real surrBasedLocalTRContractTrigger

  this value ("eta_1" in the Conn-Gould-Toint trust region book)

- Real surrBasedLocalTRExpandTrigger

  value ("eta_2" in the Conn-Gould-Toint trust region book)

- Real surrBasedLocalTRContract

(from the `contraction_factor` *specification in* **MethodSBL***)*

- Real surrBasedLocalTRExpand

  (from the `expansion_factor` *specification in* **MethodSBL***)*

- short surrBasedLocalSubProbObj

  LAGRANGIAN_OBJECTIVE, or AUGMENTED_LAGRANGIAN_OBJECTIVE.

- short surrBasedLocalSubProbCon

  LINEARIZED_CONSTRAINTS, or ORIGINAL_CONSTRAINTS.

- short surrBasedLocalMeritFn

  BASIC_LAGRANGIAN, or AUGMENTED_LAGRANGIAN.

- short surrBasedLocalAcceptLogic

  SBL iterate acceptance logic: TR_RATIO or FILTER.

- short surrBasedLocalConstrRelax

  SBL constraint relaxation method: NO_RELAX or HOMOTOPY.

- bool surrBasedGlobalReplacePts

  next surrogate is based in the `surrogate_based_global` *strategy.*

- String minMaxType

  the `optimization_type` *specification in* **MethodDOTDC**

- String dlDetails

  string of options for a dynamically linked solver

- void * dlLib

  handle to dynammically loaded library

- int verifyLevel

  the `verify_level` *specification in* **MethodNPSOLDC**

- Real functionPrecision

  the `function_precision` *specification in* **MethodNPSOLDC**

- Real lineSearchTolerance

  the `linesearch_tolerance` *specification in* **MethodNPSOLDC**

- Real absConvTol

  absolute function convergence tolerance

- Real xConvTol

  x-convergence tolerance

- Real singConvTol

  singular convergence tolerance

- Real singRadius

  radius for singular convergence test

- Real falseConvTol

  false-convergence tolerance

- Real initTRRadius

  initial trust radius

- int covarianceType

  kind of covariance required

- bool regressDiag

  whether to print the regression diagnostic vector

- String searchMethod

  interior-point methods in **MethodOPTPPDC**

- Real gradientTolerance

  the `gradient_tolerance` *specification in* **MethodOPTPPDC**

- Real maxStep

  the `max_step` *specification in* **MethodOPTPPDC**

- String meritFn

  interior-point methods in **MethodOPTPPDC**

- String centralPath

  methods in **MethodOPTPPDC**

- Real stepLenToBoundary

  interior-point methods in **MethodOPTPPDC**

- Real centeringParam

  interior-point methods in **MethodOPTPPDC**

- int searchSchemeSize

  MethodOPTPPDC

- Real initStepLength

  MethodAPPSDC

- Real contractStepLength

  MethodAPPSDC

- Real threshStepLength

  MethodAPPSDC

- String evalSynchronize

  MethodAPPSDC

- String meritFunction

  MethodAPPSDC

- Real constrPenalty

  MethodAPPSDC

- Real smoothFactor

  MethodAPPSDC

- String evalSynchronization

  methods in **MethodCOLINYPS** *and* **MethodAPPS**

- Real constraintPenalty

  MethodCOLINYSW *and* **MethodCOLINYEA**

- bool constantPenalty

  MethodCOLINYPS *and* **MethodCOLINYSW**

- Real globalBalanceParam

  MethodCOLINYDIR

- Real localBalanceParam

  MethodCOLINYDIR

- Real maxBoxSize

  the `max_boxsize_limit` *for the DIRECT method in* **MethodCOLINYDIR**

- Real minBoxSize

  and **MethodNCSUDC**

- String boxDivision

  the DIRECT method in **MethodCOLINYDIR**

- bool mutationAdaptive

  MethodCOLINYEA

- bool showMiscOptions

the `show_misc_options` *specification in* **MethodCOLINYDC**

- StringArray miscOptions

  the `misc_options` *specification in* **MethodCOLINYDC**

- Real solnTarget

  the `solution_target` *specification in* **MethodCOLINYDC**

- Real crossoverRate

  the `crossover_rate` *specification for EA methods in* **MethodCOLINYEA**

- Real mutationRate

  the `mutation_rate` *specification for EA methods in* **MethodCOLINYEA**

- Real mutationScale

  the `mutation_scale` *specification for EA methods in* **MethodCOLINYEA**

- Real mutationMinScale

  MethodCOLINYEA

- Real initDelta

  MethodCOLINYSW

- Real threshDelta

  MethodCOLINYSW

- Real contractFactor

  MethodAPPS, **MethodCOLINYPS**, *and* **MethodCOLINYSW**

- int newSolnsGenerated

  in **MethodCOLINYEA**

- int numberRetained

  MethodCOLINYEA.

- bool expansionFlag

  MethodAPPS, **MethodCOLINYPS**, *and* **MethodCOLINYSW**

- int expandAfterSuccess

  MethodCOLINYPS *and* **MethodCOLINYSW**

- int contractAfterFail

  MethodCOLINYSW

- int mutationRange

  MethodCOLINYEA

- int totalPatternSize

  MethodCOLINYPS

- bool randomizeOrderFlag

  the `stochastic` *specification for the PS method in* **MethodCOLINYPS**

- String selectionPressure

  the `fitness_type` *specification for EA methods in* **MethodCOLINYEA**

- String replacementType

  MethodCOLINYEA

- String crossoverType

  the `crossover_type` *specification for EA methods in* **MethodCOLINYEA**

- String mutationType

  the `mutation_type` *specification for EA methods in* **MethodCOLINYEA**

- String exploratoryMoves

  MethodCOLINYPS

- String patternBasis

  MethodAPPS *and* **MethodCOLINYPS**

- size_t numCrossPoints

  The number of crossover points or multi-point schemes.

- size_t numParents

  The number of parents to use in a crossover operation.

- size_t numOffspring

  The number of children to produce in a crossover operation.

- String fitnessType

  the fitness assessment operator to use.

- String convergenceType

  The means by which this JEGA should converge.

- Real percentChange

  for a fitness tracker converger.

- size_t numGenerations

  tracker converger should track.

- Real fitnessLimit

  below_limit selector).

- Real shrinkagePercent

  must take place on each call to the selector (0, 1).

- String nichingType

  The niching type.

- RealVector nicheVector

  The discretization percentage along each objective.

- String postProcessorType

  The post processor type.

- RealVector distanceVector

  The discretization percentage along each objective.

- String initializationType

  The means by which the JEGA should initialize the population.

- String flatFile

  The filename to use for initialization.

- String logFile

  The filename to use for logging.

- int populationSize

  MethodCOLINYEA.

- bool printPopFlag

  at each generation

- Real volBoxSize

  the `volume_boxsize_limit` *for the DIRECT method in* **MethodNCSUDC**

- int numSymbols

  the `symbols` *specification for DACE methods*

- bool mainEffectsFlag

  in **MethodDDACE***)*

- bool latinizeFlag

  MethodFSUDACE

- bool volQualityFlag

and CVT methods in **MethodFSUDACE***)*

- IntVector sequenceStart

  the `sequenceStart` *specification in* **MethodFSUDACE**

- IntVector sequenceLeap

  the `sequenceLeap` *specification in* **MethodFSUDACE**

- IntVector primeBase

  the `primeBase` *specification in* **MethodFSUDACE**

- int numTrials

  the `numTrials` *specification in* **MethodFSUDACE**

- String trialType

  the `trial_type` *specification in* **MethodFSUDACE**

- int randomSeed

  the `seed` *specification for COLINY, NonD, & DACE methods*

- int numSamples

  the `samples` *specification for NonD & DACE methods*

- bool fixedSeedFlag

  stencil/pattern throughout a strategy with repeated sampling.

- bool fixedSequenceFlag

  stencil/pattern throughout a strategy with repeated sampling.

- int previousSamples

  the number of previous samples when augmenting a LHS sample

- bool vbdFlag

  the `var_based_decomp` *specification for a variety of sampling methods*

- short vbdControl

  main/interaction/total effects

- Real vbdDropTolerance

  the `var_based_decomp` *tolerance for omitting index output*

- String rngName

  the `basic` *random-number generator for NonD*

- short refinementType

  keyword group

- short refinementControl

  keyword group

- short nestingOverride

  refinement type for stochastic expansions from `refinement` *keyword*

- short expansionType

  ASKEY_U or STD_NORMAL_U based on input keywords `askey` *or* `wiener`.

- int expansionTerms

  the `expansion_terms` *specification in* **MethodNonDPCE**

- UShortArray expansionOrder

  the `expansion_order` *specification in* **MethodNonDPCE**

- int expansionSamples

  the `expansion_samples` *specification in* **MethodNonDPCE**

- String expansionSampleType

  incremental_lhs specification in **MethodNonDPCE**

- UShortArray quadratureOrder

  MethodNonDSC

- unsigned short sparseGridLevel

  MethodNonDSC

- unsigned short cubIntOrder

  the `cubature_integrand` *specification in* **MethodNonDPCE**

- RealVector sparseGridDimPref

  MethodNonDPCE *and* **MethodNonDSC**

- int collocationPoints

  the `collocation_points` *specification in* **MethodNonDPCE**

- Real collocationRatio

  the `collocation_ratio` *specification in* **MethodNonDPCE**

- String collocPtReuse

  reuse_points specification in **MethodNonDPCE**

- bool expansionDerivUsageFlag

  specification in **MethodNonDPCE**

- String expansionImportFile

  the `expansion_import_file` *specification in* **MethodNonDPCE**

- String sampleType

  MethodNonDPCE, and **MethodNonDSC**.

- String reliabilitySearchType

  MethodNonDGlobalRel *(*`x_gaussian_process` *or* `u_gaussian_process`*)*

- String reliabilityIntegration

  MethodNonDLocalRel

- String integrationRefine

  and **MethodNonDSC**

- String nondOptAlgorithm

  MethodNonDLocalRel *or the interval in* **MethodNonDLocalIntervalEst**

- String distributionType

  and **MethodNonDGlobalRel**

- String responseLevelMappingType

  MethodNonDLocalRel, *and* **MethodNonDGlobalRel**

- RealVectorArray responseLevels

  MethodNonDPCE, **MethodNonDLocalRel**, *and* **MethodNonDGlobalRel**

- RealVectorArray probabilityLevels

  MethodNonDPCE, **MethodNonDLocalRel**, *and* **MethodNonDGlobalRel**

- RealVectorArray reliabilityLevels

  MethodNonDPCE, *and* **MethodNonDLocalRel**

- RealVectorArray genReliabilityLevels

  MethodNonDPCE, **MethodNonDLocalRel**, *and* **MethodNonDGlobalRel**

- bool allVarsFlag

  the `all_variables` *specification in* **MethodNonDMC**

- String xObsDataFile

  filename from which to read the x observed data for gpmsa

- String yObsDataFile

  filename from which to read the x observed data for gpmsa

- String yStdDataFile

filename from which to read the y std of error for gpmsa

- RealVector finalPoint

  the `final_point` *specification in* **MethodPSVPS**

- RealVector stepVector

  the `step_vector` *specification in* **MethodPSVPS** *and* **MethodPSCPS**

- int numSteps

  the `num_steps` *specification in* **MethodPSVPS**

- IntVector stepsPerVariable

  the `deltas_per_variable` *specification in* **MethodPSCPS**

- RealVector listOfPoints

  the `list_of_points` *specification in* **MethodPSLPS**

- UShortArray varPartitions

  the `partitions` *specification for PStudy method in* **MethodPSMPS**

- Real refinementRate

  rate of mesh refinement in Richardson extrapolation

Private Member Functions

- DataMethodRep ()

  constructor

- ~DataMethodRep ()

  destructor

- void write (std::ostream &s) const

  write a DataInterfaceRep object to an std::ostream

- void read (MPIUnpackBuffer &s)

  read a DataInterfaceRep object from a packed MPI buffer

- void write (MPIPackBuffer &s) const

  write a DataInterfaceRep object to a packed MPI buffer

Private Attributes

- int referenceCount

  number of handle objects sharing this dataMethodRep

Friends

- class DataMethod

  the handle class can access attributes of the body class directly

8.24.1 Detailed Description

Body class for method specification data.

The DataMethodRep class is used to contain the data from a method keyword specification. Default values are managed in the DataMethodRep constructor. Data is public to avoid maintaining set/get functions, but is still encapsulated within ProblemDescDB since ProblemDescDB::dataMethodList is private (a similar approach is used with SurrogateDataPoint objects contained in Dakota::Approximation).

The documentation for this class was generated from the following files:

- DataMethod.H
- DataMethod.C

8.25 DataModel Class Reference

Handle class for model specification data.

Public Member Functions

- DataModel ()

  constructor

- DataModel (const DataModel &)

  copy constructor

- ~DataModel ()

  destructor

- DataModel & operator= (const DataModel &)

  assignment operator

- void write (std::ostream &s) const

  write a DataModel object to an std::ostream

- void read (MPIUnpackBuffer &s)

  read a DataModel object from a packed MPI buffer

- void write (MPIPackBuffer &s) const

  write a DataModel object to a packed MPI buffer

Static Public Member Functions

- static bool **id_compare** (const DataModel &dm, const std::string &id)

Private Attributes

- DataModelRep * dataModelRep

  pointer to the body (handle-body idiom)

Friends

- class **ProblemDescDB**
- class **NIDRProblemDescDB**

8.25.1 Detailed Description

Handle class for model specification data.

The DataModel class is used to provide a memory management handle for the data in DataModelRep. It is populated by IDRProblemDescDB::model_kwhandler() and is queried by the ProblemDescDB::get_<datatype>() functions. A list of DataModel objects is maintained in ProblemDescDB::dataModelList, one for each model specification in an input file.

The documentation for this class was generated from the following files:

- DataModel.H
- DataModel.C

8.26 DataModelRep Class Reference

Body class for model specification data.

Public Attributes

- String idModel

  the `id_model` *specification in* **ModelIndControl***)*

- String modelType

  specification in **ModelIndControl***)*

- String variablesPointer

  (from the `variables_pointer` *specification in* **ModelIndControl***)*

- String interfacePointer

  the `optional_interface_pointer` *specification in* **ModelNested***)*

- String responsesPointer

  (from the `responses_pointer` *specification in* **ModelIndControl***)*

- String subMethodPointer

  ModelNested*)*

- IntSet surrogateFnIndices

  array specifying the response function set that is approximated

- String surrogateType

  polynomial,kriging), or hierarchical

- String truthModelPointer

  specification in **ModelSurrH***)*

- String lowFidelityModelPointer

  specification in **ModelSurrH***)*

- int pointsTotal

  up the difference)

- bool pointsMinimum

  model

- bool pointsRecommended

  the model

- String approxPointReuse

  ModelSurrG*)*

- String approxPointReuseFile

  specification in **ModelSurrG**

- String approxCorrectionType

  in **ModelSurrG** *and* **ModelSurrH***)*

- short approxCorrectionOrder

  and **ModelSurrH***)*

- bool approxDerivUsageFlag

  (from the `use_derivatives` *specification in* **ModelSurrG***)*

- short polynomialOrder

  in **ModelSurrG***)*

- RealVector krigingCorrelations

  (from the `correlations` *specification in* **ModelSurrG***)*

- String krigingOptMethod

  none, sampling, local, global

- short krigingMaxTrials

  maximum number of trials in optimization of kriging correlations

- RealVector krigingMaxCorrelations

  upper bound on kriging correlation vector

- RealVector krigingMinCorrelations

  lower bound on kriging correlation vector

- short mlsPolyOrder

  polynomial order for moving least squares approximation

- short mlsWeightFunction

  weight function for moving least squares approximation

- short rbfBases

  bases for radial basis function approximation

- short rbfMaxPts

  maximum number of points for radial basis function approximation

- short rbfMaxSubsets

maximum number of subsets for radial basis function approximation

- short rbfMinPartition

  minimum partition for radial basis function approximation

- short marsMaxBases

  maximum number of bases for MARS approximation

- String marsInterpolation

  interpolation type for MARS approximation

- short annRandomWeight

  random weight for artificial neural network approximation

- short annNodes

  number of nodes for artificial neural network approximation

- Real annRange

  range for artificial neural network approximation

- String trendOrder

  `gaussian_process` *specification in* **ModelSurrG***)*

- bool pointSelection

  flag indicating the use of point selection in the Gaussian process

- StringArray diagMetrics

  goodness of fit for a surrogate model.

- String optionalInterfRespPointer

  optional_interface_responses_pointer specification in **ModelNested***)*

- StringArray primaryVarMaps

  ModelNested*)*

- StringArray secondaryVarMaps

  `secondary_variable_mapping` *specification in* **ModelNested***)*

- RealVector primaryRespCoeffs

  specification in **ModelNested***)*

- RealVector secondaryRespCoeffs

  specification in **ModelNested***)*

Private Member Functions

- DataModelRep ()

  constructor

- ~DataModelRep ()

  destructor

- void write (std::ostream &s) const

  write a DataModelRep object to an std::ostream

- void read (MPIUnpackBuffer &s)

  read a DataModelRep object from a packed MPI buffer

- void write (MPIPackBuffer &s) const

  write a DataModelRep object to a packed MPI buffer

Private Attributes

- int referenceCount

  number of handle objects sharing this dataModelRep

Friends

- class DataModel

  the handle class can access attributes of the body class directly

8.26.1 Detailed Description

Body class for model specification data.

The DataModelRep class is used to contain the data from a model keyword specification. Default values are managed in the DataModelRep constructor. Data is public to avoid maintaining set/get functions, but is still encapsulated within ProblemDescDB since ProblemDescDB::dataModelList is private (a similar approach is used with SurrogateDataPoint objects contained in Dakota::Approximation).

The documentation for this class was generated from the following files:

- DataModel.H
- DataModel.C

8.27 DataResponses Class Reference

Handle class for responses specification data.

Public Member Functions

- DataResponses ()
  constructor
- DataResponses (const DataResponses &)
  copy constructor
- ~DataResponses ()
  destructor
- DataResponses & operator= (const DataResponses &)
  assignment operator
- void write (std::ostream &s) const
  write a DataResponses object to an std::ostream
- void read (MPIUnpackBuffer &s)
  read a DataResponses object from a packed MPI buffer
- void write (MPIPackBuffer &s) const
  write a DataResponses object to a packed MPI buffer

Static Public Member Functions

- static bool **id_compare** (const DataResponses &dr, const std::string &id)

Private Attributes

- DataResponsesRep * dataRespRep
  pointer to the body (handle-body idiom)

Friends

- class **ProblemDescDB**
- class **NIDRProblemDescDB**
- void run_dakota_data ()
  mode 2: direct Data class instantiation.

8.27.1 Detailed Description

Handle class for responses specification data.

The DataResponses class is used to provide a memory management handle for the data in DataResponsesRep. It is populated by IDRProblemDescDB::responses_kwhandler() and is queried by the ProblemDescDB::get_-<datatype>() functions. A list of DataResponses objects is maintained in ProblemDescDB::dataResponsesList, one for each responses specification in an input file.

8.27.2 Friends And Related Function Documentation

8.27.2.1 void run_dakota_data () [friend]

mode 2: direct Data class instantiation.

Rather than parsing from an input file, this function populates Data class objects directly using a minimal specification and relies on constructor defaults and post-processing in post_process() to fill in the rest.

The documentation for this class was generated from the following files:

- DataResponses.H
- DataResponses.C

8.28 DataResponsesRep Class Reference

Body class for responses specification data.

Public Attributes

- size_t numObjectiveFunctions

  num_objective_functions specification in **RespFnOpt***)*

- size_t numNonlinearIneqConstraints

  num_nonlinear_inequality_constraints specification in **RespFnOpt***)*

- size_t numNonlinearEqConstraints

  num_nonlinear_equality_constraints specification in **RespFnOpt***)*

- size_t numLeastSqTerms

  num_least_squares_terms specification in **RespFnLS***)*

- size_t numResponseFunctions

  num_response_functions specification in **RespFnGen***)*

- StringArray primaryRespFnScaleTypes

  the `least_squares_term_scale_types` *specification in* **RespFnLS***)*

- RealVector primaryRespFnScales

  the `least_squares_term_scales` *specification in* **RespFnLS***)*

- RealVector primaryRespFnWeights

  specification in **RespFnLS***)*

- String leastSqDataFile

  RespFnLS*)*

- RealVector nonlinearIneqLowerBnds

  nonlinear_inequality_lower_bounds specification in **RespFnOpt***)*

- RealVector nonlinearIneqUpperBnds

  nonlinear_inequality_upper_bounds specification in **RespFnOpt***)*

- StringArray nonlinearIneqScaleTypes

  nonlinear_inequality_scale_types specification in **RespFnOpt***)*

- RealVector nonlinearIneqScales

  nonlinear_inequality_scales specification in **RespFnOpt***)*

- RealVector nonlinearEqTargets

  nonlinear_equality_targets specification in **RespFnOpt***)*

- StringArray nonlinearEqScaleTypes

  nonlinear_equality_scale_types specification in **RespFnOpt***)*

- RealVector nonlinearEqScales

  nonlinear_equality_scales specification in **RespFnOpt***)*

- String gradientType

  `mixed_gradients` *specifications in* **RespGrad***)*

- String hessianType

  RespHess*)*

- bool ignoreBounds

  is to honor bounds)

- bool centralHess

  finite-difference Hessians; default is forward differences.

- String quasiHessianType

  and `sr1` *specifications in* **RespHess***)*

- String methodSource

  method_source specification in **RespGradNum** *and* **RespGradMixed***)*

- String intervalType

  interval_type specification in **RespGradNum** *and* **RespGradMixed***)*

- RealVector fdGradStepSize

  specification in **RespGradNum** *and* **RespGradMixed***)*

- RealVector fdHessStepSize

  RespHessMixed*)*

- IntList idNumericalGrads

  specification in **RespGradMixed***)*

- IntList idAnalyticGrads

  specification in **RespGradMixed***)*

- IntList idNumericalHessians

  specification in **RespHessMixed***)*

- IntList idQuasiHessians

specification in **RespHessMixed***)*

- IntList idAnalyticHessians

  specification in **RespHessMixed***)*

- String idResponses

  (from the `id_responses` *specification in* **RespSetId***)*

- StringArray responseLabels

  specification in **RespLabels***)*

Private Member Functions

- DataResponsesRep ()

  constructor

- ~DataResponsesRep ()

  destructor

- void write (std::ostream &s) const

  write a DataResponsesRep object to an std::ostream

- void read (MPIUnpackBuffer &s)

  read a DataResponsesRep object from a packed MPI buffer

- void write (MPIPackBuffer &s) const

  write a DataResponsesRep object to a packed MPI buffer

Private Attributes

- int referenceCount

  number of handle objects sharing this dataResponsesRep

Friends

- class DataResponses

  the handle class can access attributes of the body class directly

8.28.1 Detailed Description

Body class for responses specification data.

The DataResponsesRep class is used to contain the data from a responses keyword specification. Default values are managed in the DataResponsesRep constructor. Data is public to avoid maintaining set/get functions, but is still encapsulated within ProblemDescDB since ProblemDescDB::dataResponsesList is private (a similar approach is used with SurrogateDataPoint objects contained in Dakota::Approximation).

The documentation for this class was generated from the following files:

- DataResponses.H
- DataResponses.C

8.29 DataStrategy Class Reference

Handle class for strategy specification data.

Public Member Functions

- DataStrategy ()

  constructor

- DataStrategy (const DataStrategy &)

  copy constructor

- ~DataStrategy ()

  destructor

- DataStrategy & operator= (const DataStrategy &)

  assignment operator

- void write (std::ostream &s) const

  write a DataStrategy object to an std::ostream

- void read (MPIUnpackBuffer &s)

  read a DataStrategy object from a packed MPI buffer

- void write (MPIPackBuffer &s) const

  write a DataStrategy object to a packed MPI buffer

Private Attributes

- DataStrategyRep * dataStratRep

  pointer to the body (handle-body idiom)

Friends

- class **ProblemDescDB**
- class **NIDRProblemDescDB**

8.29.1 Detailed Description

Handle class for strategy specification data.

The DataStrategy class is used to provide a memory management handle for the data in DataStrategyRep. It is populated by IDRProblemDescDB::strategy_kwhandler() and is queried by the ProblemDescDB::get_<datatype>() functions. A single DataStrategy object is maintained in ProblemDescDB::strategySpec.

The documentation for this class was generated from the following files:

- DataStrategy.H
- DataStrategy.C

8.30 DataStrategyRep Class Reference

Body class for strategy specification data.

Public Attributes

- String strategyType

  the strategy selection: hybrid, multi_start, pareto_set, or single_method

- bool graphicsFlag

  specification in **StratIndControl***)*

- bool tabularDataFlag

  the tabular_graphics_data specification in **StratIndControl***)*

- String tabularDataFile

  the tabular_graphics_file specification in **StratIndControl***)*

- int outputPrecision

  output precision for tabular and screen output

- int iteratorServers

  the iterator_servers specification in **StratIndControl***)*

- String iteratorScheduling

  `iterator_static_scheduling` *specifications in* **StratIndControl***)*

- String methodPointer

  specifications in **StratSingle** *and* **StratMultiStart***)*

- StringArray hybridMethodList

  in **StratHybrid***)*

- String hybridType

  `embedded`*, and* `sequential` *specifications in* **StratHybrid***)*

- String hybridGlobalMethodPointer

  global_method_pointer specification in **StratHybrid***)*

- String hybridLocalMethodPointer

  local_method_pointer specification in **StratHybrid***)*

- Real hybridLSProb

  local_search_probability specification in **StratHybrid***)*

- int concurrentRandomJobs

  in **StratMultiStart** *and* **StratParetoSet***)*

- int concurrentSeed

  and **StratParetoSet***)*

- RealVector concurrentParameterSets

  StratMultiStart and **StratParetoSet***).*

Private Member Functions

- DataStrategyRep ()

  constructor

- ~DataStrategyRep ()

  destructor

- void write (std::ostream &s) const

  write a DataStrategyRep object to an std::ostream

- void read (MPIUnpackBuffer &s)

  read a DataStrategyRep object from a packed MPI buffer

- void write (MPIPackBuffer &s) const

  write a DataStrategyRep object to a packed MPI buffer

Private Attributes

- int referenceCount

  number of handle objects sharing this dataStrategyRep

Friends

- class DataStrategy

  the handle class can access attributes of the body class directly

8.30.1 Detailed Description

Body class for strategy specification data.

The DataStrategyRep class is used to contain the data from the strategy keyword specification. Default values are managed in the DataStrategyRep constructor. Data is public to avoid maintaining set/get functions, but is still encapsulated within ProblemDescDB since ProblemDescDB::strategySpec is private (a similar approach is used with SurrogateDataPoint objects contained in Dakota::Approximation).

The documentation for this class was generated from the following files:

- DataStrategy.H
- DataStrategy.C

8.31 DataVariables Class Reference

Handle class for variables specification data.

Public Member Functions

- DataVariables ()

  constructor

- DataVariables (const DataVariables &)

  copy constructor

- ~DataVariables ()

  destructor

- DataVariables operator= (const DataVariables &)

  assignment operator

- bool operator== (const DataVariables &)

  equality operator

- void write (std::ostream &s) const

  write a DataVariables object to an std::ostream

- void read (MPIUnpackBuffer &s)

  read a DataVariables object from a packed MPI buffer

- void write (MPIPackBuffer &s) const

  write a DataVariables object to a packed MPI buffer

- size_t design ()

  return total number of design variables

- size_t aleatory_uncertain ()

  return total number of aleatory uncertain variables

- size_t epistemic_uncertain ()

  return total number of epistemic uncertain variables

- size_t uncertain ()

  return total number of uncertain variables

- size_t state ()

  return total number of state variables

- size_t continuous_variables ()

  return total number of continuous variables

- size_t discrete_variables ()

  return total number of discrete variables

- size_t total_variables ()

  return total number of variables

Static Public Member Functions

- static bool **id_compare** (const DataVariables &dv, const std::string &id)

Private Attributes

- DataVariablesRep * dataVarsRep

  pointer to the body (handle-body idiom)

Friends

- class **ProblemDescDB**
- class **NIDRProblemDescDB**
- void run_dakota_data ()

  mode 2: direct Data class instantiation.

8.31.1 Detailed Description

Handle class for variables specification data.

The DataVariables class is used to provide a memory management handle for the data in DataVariablesRep. It is populated by IDRProblemDescDB::variables_kwhandler() and is queried by the ProblemDescDB::get_-<datatype>() functions. A list of DataVariables objects is maintained in ProblemDescDB::dataVariablesList, one for each variables specification in an input file.

8.31.2 Friends And Related Function Documentation

8.31.2.1 void run_dakota_data () [friend]

mode 2: direct Data class instantiation.

Rather than parsing from an input file, this function populates Data class objects directly using a minimal specification and relies on constructor defaults and post-processing in post_process() to fill in the rest.

The documentation for this class was generated from the following files:

- DataVariables.H
- DataVariables.C

8.32 DataVariablesRep Class Reference

Body class for variables specification data.

Public Attributes

- String idVariables

  (from the `id_variables` *specification in* **VarSetId***)*

- size_t numContinuousDesVars

  specification in **VarDV***)*

- size_t numDiscreteDesRangeVars

  (from the `discrete_design_range` *specification in* **VarDV***)*

- size_t numDiscreteDesSetIntVars

  (from the `discrete_design_set_integer` *specification in* **VarDV***)*

- size_t numDiscreteDesSetRealVars

  (from the `discrete_design_set_real` *specification in* **VarDV***)*

- size_t numNormalUncVars

  specification in **VarAUV***)*

- size_t numLognormalUncVars

  specification in **VarAUV***)*

- size_t numUniformUncVars

  specification in **VarAUV***)*

- size_t numLoguniformUncVars

  loguniform_uncertain specification in **VarAUV***)*

- size_t numTriangularUncVars

  triangular_uncertain specification in **VarAUV***)*

- size_t numExponentialUncVars

  exponential_uncertain specification in **VarAUV***)*

- size_t numBetaUncVars

  specification in **VarAUV***)*

- size_t numGammaUncVars

  specification in **VarAUV***)*

- size_t numGumbelUncVars

  specification in **VarAUV***)*

- size_t numFrechetUncVars

  specification in **VarAUV***)*

- size_t numWeibullUncVars

  specification in **VarAUV***)*

- size_t numHistogramBinUncVars

  histogram_bin_uncertain specification in **VarAUV***)*

- size_t numPoissonUncVars

  poisson_uncertain specification in **VarAUV***)*

- size_t numBinomialUncVars

  binomial_uncertain specification in **VarAUV***)*

- size_t numNegBinomialUncVars

  negative_binomial_uncertain specification in **VarAUV***)*

- size_t numGeometricUncVars

  geometric_uncertain specification in **VarAUV**

- size_t numHyperGeomUncVars

  hypergeometric_uncertain specification in **VarAUV***))*

- size_t numHistogramPtUncVars

  histogram_point_uncertain specification in **VarAUV***)*

- size_t numIntervalUncVars

  specification in **VarEUV***)*

- size_t numContinuousStateVars

  specification in **VarSV***)*

- size_t numDiscreteStateRangeVars

  (from the `discrete_state_range` *specification in* **VarDV***)*

- size_t numDiscreteStateSetIntVars

  (from the `discrete_state_set_integer` *specification in* **VarDV***)*

- size_t numDiscreteStateSetRealVars

  (from the `discrete_state_set_real` *specification in* **VarDV***)*

- RealVector continuousDesignVars

the `continuous_design initial_point` *specification in* **VarDV***)*

- RealVector continuousDesignLowerBnds

  `continuous_design lower_bounds` *specification in* **VarDV***)*

- RealVector continuousDesignUpperBnds

  `continuous_design upper_bounds` *specification in* **VarDV***)*

- StringArray continuousDesignScaleTypes

  `continuous_design scale_types` *specification in* **VarDV***)*

- RealVector continuousDesignScales

  `continuous_design scales` *specification in* **VarDV***)*

- IntVector discreteDesignRangeVars

  specification in **VarDV***)*

- IntVector discreteDesignRangeLowerBnds

  specification in **VarDV***)*

- IntVector discreteDesignRangeUpperBnds

  upper_bounds specification in **VarDV***)*

- IntVector discreteDesignSetIntVars

  specification in **VarDV***)*

- RealVector discreteDesignSetRealVars

  specification in **VarDV***)*

- IntSetArray discreteDesignSetInt

  `discrete_design_set_integer set_values` *specification in* **VarDV***)*

- RealSetArray discreteDesignSetReal

  `set_values` *specification in* **VarDV***)*

- StringArray continuousDesignLabels

  `continuous_design descriptors` *specification in* **VarDV***)*

- StringArray discreteDesignRangeLabels

  specification in **VarDV***)*

- StringArray discreteDesignSetIntLabels

  specification in **VarDV***)*

- StringArray discreteDesignSetRealLabels

  specification in **VarDV***)*

- RealVector normalUncMeans

  specification in **VarAUV***)*

- RealVector normalUncStdDevs

  the `nuv_std_deviations` *specification in* **VarAUV***)*

- RealVector normalUncLowerBnds

  (from the `nuv_lower_bounds` *specification in* **VarAUV***)*

- RealVector normalUncUpperBnds

  (from the `nuv_upper_bounds` *specification in* **VarAUV***)*

- RealVector lognormalUncLambdas

  variables (from the `lnuv_lambdas` *specification in* **VarAUV***)*

- RealVector lognormalUncZetas

  uncertain variables (from the `lnuv_zetas` *specification in* **VarAUV***)*

- RealVector lognormalUncMeans

  lnuv_means specification in **VarAUV***)*

- RealVector lognormalUncStdDevs

  the `lnuv_std_deviations` *specification in* **VarAUV***)*

- RealVector lognormalUncErrFacts

  the `lnuv_error_factors` *specification in* **VarAUV***)*

- RealVector lognormalUncLowerBnds

  (from the `lnuv_lower_bounds` *specification in* **VarAUV***)*

- RealVector lognormalUncUpperBnds

  (from the `lnuv_upper_bounds` *specification in* **VarAUV***)*

- RealVector uniformUncLowerBnds

  (from the `uuv_lower_bounds` *specification in* **VarAUV***)*

- RealVector uniformUncUpperBnds

  (from the `uuv_upper_bounds` *specification in* **VarAUV***)*

- RealVector loguniformUncLowerBnds

  (from the `luuv_lower_bounds` *specification in* **VarAUV***)*

- RealVector loguniformUncUpperBnds

  (from the `luuv_upper_bounds` *specification in* **VarAUV***)*

- RealVector triangularUncModes

  specification in **VarAUV***)*

- RealVector triangularUncLowerBnds

  (from the `tuv_lower_bounds` *specification in* **VarAUV***)*

- RealVector triangularUncUpperBnds

  (from the `tuv_upper_bounds` *specification in* **VarAUV***)*

- RealVector exponentialUncBetas

  the `euv_betas` *specification in* **VarAUV***)*

- RealVector betaUncAlphas

  the `buv_means` *specification in* **VarAUV***)*

- RealVector betaUncBetas

  the `buv_std_deviations` *specification in* **VarAUV***)*

- RealVector betaUncLowerBnds

  (from the `buv_lower_bounds` *specification in* **VarAUV***)*

- RealVector betaUncUpperBnds

  (from the `buv_upper_bounds` *specification in* **VarAUV***)*

- RealVector gammaUncAlphas

  the `gauv_alphas` *specification in* **VarAUV***)*

- RealVector gammaUncBetas

  the `gauv_betas` *specification in* **VarAUV***)*

- RealVector gumbelUncAlphas

  guuv_alphas specification in **VarAUV***)*

- RealVector gumbelUncBetas

  the `guuv_betas` *specification in* **VarAUV***)*

- RealVector frechetUncAlphas

  the `fuv_alphas` *specification in* **VarAUV***)*

- RealVector frechetUncBetas

  the `fuv_betas` *specification in* **VarAUV***)*

- RealVector weibullUncAlphas

  the `wuv_alphas` *specification in* **VarAUV***)*

- RealVector weibullUncBetas

the `wuv_betas` *specification in* **VarAUV***)*

- RealVectorArray histogramUncBinPairs

  counts within NIDR.

- RealVector poissonUncLambdas

  the `lambdas` *specification in* **VarAUV***)*

- RealVector binomialUncProbPerTrial

  from the `prob_per_trial` *specification in* **VarAUV***)*

- IntVector binomialUncNumTrials

  from the `num_trials` *specification in* **VarAUV***)*

- RealVector negBinomialUncProbPerTrial

  variables from the `prob_per_trial` *specification in* **VarAUV***)*

- IntVector negBinomialUncNumTrials

  from the `num_trials` *specification in* **VarAUV***)*

- RealVector geometricUncProbPerTrial

  variables from the `prob_per_trial` *specification in* **VarAUV***)*

- IntVector hyperGeomUncTotalPop

  from the `total_population` *specification in* **VarAUV***)*

- IntVector hyperGeomUncSelectedPop

  from the `selected_population` *specification in* **VarAUV***)*

- IntVector hyperGeomUncNumDrawn

  variablesfrom the `num_drawn` *specification in* **VarAUV***)*

- RealVectorArray histogramUncPointPairs

  from the `histogram_point_uncertain` *specification in* **VarAUV***)*

- RealVectorArray intervalUncBasicProbs

  iuv_interval_probs specification in **VarEUV***)*

- RealVectorArray intervalUncBounds

  iuv_interval_bounds specification in **VarEUV***)*

- RealSymMatrix uncertainCorrelations

  matrix) for analytic reliability methods.

- RealVector continuousStateVars

  the `continuous_state initial_point` *specification in* **VarSV***)*

- RealVector continuousStateLowerBnds

  `continuous_state lower_bounds` *specification in* **VarSV***)*

- RealVector continuousStateUpperBnds

  `continuous_state upper_bounds` *specification in* **VarSV***)*

- IntVector discreteStateRangeVars

  specification in **VarSV***)*

- IntVector discreteStateRangeLowerBnds

  specification in **VarSV***)*

- IntVector discreteStateRangeUpperBnds

  upper_bounds specification in **VarSV***)*

- IntVector discreteStateSetIntVars

  specification in **VarSV***)*

- RealVector discreteStateSetRealVars

  specification in **VarSV***)*

- IntSetArray discreteStateSetInt

  `discrete_state_set_integer set_values` *specification in* **VarSV***)*

- RealSetArray discreteStateSetReal

  `set_values` *specification in* **VarSV***)*

- StringArray continuousStateLabels

  `continuous_state descriptors` *specification in* **VarSV***)*

- StringArray discreteStateRangeLabels

  specification in **VarSV***)*

- StringArray discreteStateSetIntLabels

  specification in **VarSV***)*

- StringArray discreteStateSetRealLabels

  specification in **VarSV***)*

- IntVector discreteDesignSetIntLowerBnds

  discrete design integer set lower bounds inferred from set values

- IntVector discreteDesignSetIntUpperBnds

  discrete design integer set upper bounds inferred from set values

- RealVector discreteDesignSetRealLowerBnds

  discrete design real set lower bounds inferred from set values

- RealVector discreteDesignSetRealUpperBnds

  discrete design real set upper bounds inferred from set values

- RealVector continuousAleatoryUncVars

  array of values for all continuous aleatory uncertain variables

- RealVector continuousAleatoryUncLowerBnds

  for gamma, gumbel, frechet, weibull and histogram bin specifications)

- RealVector continuousAleatoryUncUpperBnds

  for gamma, gumbel, frechet, weibull and histogram bin specifications)

- StringArray continuousAleatoryUncLabels

  specifications in **VarAUV***)*

- IntVector discreteIntAleatoryUncVars

  array of values for all discrete integer aleatory uncertain variables

- IntVector discreteIntAleatoryUncLowerBnds

  uncertain variables

- IntVector discreteIntAleatoryUncUpperBnds

  uncertain variables

- StringArray discreteIntAleatoryUncLabels

  labels for all discrete integer aleatory uncertain variables

- RealVector discreteRealAleatoryUncVars

  array of values for all discrete real aleatory uncertain variables

- RealVector discreteRealAleatoryUncLowerBnds

  uncertain variables

- RealVector discreteRealAleatoryUncUpperBnds

  uncertain variables

- StringArray discreteRealAleatoryUncLabels

  labels for all discrete real aleatory uncertain variables

- RealVector continuousEpistemicUncVars

  array of values for all continuous epistemic uncertain variables

- RealVector continuousEpistemicUncLowerBnds

distribution lower bounds for all continuous epistemic uncertain variables

- RealVector continuousEpistemicUncUpperBnds

  distribution upper bounds for all continuous epistemic uncertain variables

- StringArray continuousEpistemicUncLabels

  labels for all continuous epistemic uncertain variables

- IntVector discreteStateSetIntLowerBnds

  discrete state integer set lower bounds inferred from set values

- IntVector discreteStateSetIntUpperBnds

  discrete state integer set upper bounds inferred from set values

- RealVector discreteStateSetRealLowerBnds

  discrete state real set lower bounds inferred from set values

- RealVector discreteStateSetRealUpperBnds

  discrete state real set upper bounds inferred from set values

Private Member Functions

- DataVariablesRep ()

  default constructor

- ~DataVariablesRep ()

  destructor

- void write (std::ostream &s) const

  write a DataVariablesRep object to an std::ostream

- void read (MPIUnpackBuffer &s)

  read a DataVariablesRep object from a packed MPI buffer

- void write (MPIPackBuffer &s) const

  write a DataVariablesRep object to a packed MPI buffer

Private Attributes

- int referenceCount

  number of handle objects sharing dataVarsRep

Friends

- class DataVariables

  the handle class can access attributes of the body class directly

8.32.1 Detailed Description

Body class for variables specification data.

The DataVariablesRep class is used to contain the data from a variables keyword specification. Default values are managed in the DataVariablesRep constructor. Data is public to avoid maintaining set/get functions, but is still encapsulated within ProblemDescDB since ProblemDescDB::dataVariablesList is private (a similar model is used with SurrogateDataPoint objects contained in Dakota::Approximation).

The documentation for this class was generated from the following files:

- DataVariables.H
- DataVariables.C

8.33 DDACEDesignCompExp Class Reference

Wrapper class for the DDACE design of experiments library.

Inheritance diagram for DDACEDesignCompExp::



Public Member Functions

- DDACEDesignCompExp (Model &model)

  primary constructor for building a standard DACE iterator

- DDACEDesignCompExp (Model &model, int samples, int symbols, int seed, const String &sampling_method)

  alternate constructor used for building approximations

- ~DDACEDesignCompExp ()

  destructor

- void pre_run ()

  which can generate all Variables (parameter sets) a priori

- void extract_trends ()

  Redefines the run_iterator virtual function for the PStudy/DACE branch.

- void post_input ()

  read tabular data for post-run mode

- void post_run (std::ostream &s)

  perform final analysis phase in a standalone way

- int num_samples () const

  get the current number of samples

- void sampling_reset (int min_samples, bool all_data_flag, bool stats_flag)

  reset sampling iterator to use at least min_samples

- const String & sampling_scheme () const

  return sampling name

- void vary_pattern (bool pattern_flag)

  sets varyPattern in derived classes that support it

- void get_parameter_sets (Model &model)

  Returns one block of samples (ndim ∗ num_samples).

Private Member Functions

- void compute_main_effects ()

  builds a DDaceMainEffects::OneWayANOVA if mainEffectsFlag is set

- void resolve_samples_symbols ()

  number of symbols from input.

Private Attributes

- String daceMethod

  oas, lhs, oa_lhs, random, box_behnken, central_composite, or grid

- int samplesSpec

  initial specification of number of samples

- int symbolsSpec

  initial specification of number of symbols

- int numSamples

  current number of samples to be evaluated

- int numSymbols

  (inversely related to number of replications)

- const int seedSpec

  (allows repeatable results)

- int randomSeed

  current seed for the random number generator

- bool allDataFlag

  Iterator::all_variables() and Iterator::all_responses().

- size_t numDACERuns

  counter for number of run() executions for this object

- bool varyPattern

  multiple executions are repeatable but not correlated.

- bool mainEffectsFlag

  flag which specifies main effects

- std::vector< std::vector< int > > symbolMapping

  mapping of symbols for main effects calculations

8.33.1 Detailed Description

Wrapper class for the DDACE design of experiments library.

The DDACEDesignCompExp class provides a wrapper for DDACE, a C++ design of experiments library from the Computational Sciences and Mathematics Research (CSMR) department at Sandia's Livermore CA site. This class uses design and analysis of computer experiments (DACE) methods to sample the design space spanned by the bounds of a Model. It returns all generated samples and their corresponding responses as well as the best sample found.

8.33.2 Constructor & Destructor Documentation

8.33.2.1 DDACEDesignCompExp (Model & *model*)

primary constructor for building a standard DACE iterator

This constructor is called for a standard iterator built with data from probDescDB.

8.33.2.2 DDACEDesignCompExp (Model & *model*, int *samples*, int *symbols*, int *seed*, const String & *sampling_method*)

alternate constructor used for building approximations

This alternate constructor is used for instantiations on-the-fly, using only the incoming data. No problem description database queries are used.

8.33.3 Member Function Documentation

8.33.3.1 void pre_run () `[virtual]`

which can generate all Variables (parameter sets) a priori

pre-run phase, which a derived iterator may optionally reimplement; when not present, pre-run is likely integrated into the derived run function. This is a virtual function; when re-implementing, a derived class must call its nearest parent's pre_run(), if implemented, typically _before_ performing its own implementation steps.

Reimplemented from Iterator.

8.33.3.2 void post_run (std::ostream & *s*) [virtual]

perform final analysis phase in a standalone way

Post-run phase, which a derived iterator may optionally reimplement; when not present, post-run is likely integrated into run. This is a virtual function; when re-implementing, a derived class must call its nearest parent's post_run(), typically _after_ performing its own implementation steps.

Reimplemented from Iterator.

8.33.3.3 int num_samples () const [inline, virtual]

get the current number of samples

Return current number of evaluation points. Since the calculation of samples, collocation points, etc. might be costly, provide a default implementation here that backs out from the maxConcurrency. May be (is) overridden by derived classes.

Reimplemented from Iterator.

8.33.3.4 void resolve_samples_symbols () [private]

number of symbols from input.

This function must define a combination of samples and symbols that is acceptable for a particular sampling algorithm. Users provide requests for these quantities, but this function must enforce any restrictions imposed by the sampling algorithms.

The documentation for this class was generated from the following files:

- DDACEDesignCompExp.H
- DDACEDesignCompExp.C

8.34 DirectApplicInterface Class Reference

and testers using direct procedure calls.

Inheritance diagram for DirectApplicInterface::

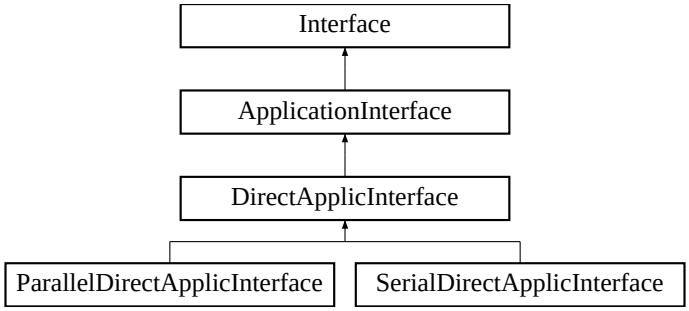

Public Member Functions

- DirectApplicInterface (const ProblemDescDB &problem_db)

  constructor

- ~DirectApplicInterface ()

  destructor

- void derived_map (const Variables &vars, const ActiveSet &set, Response &response, int fn_eval_id)

  that is specific to a derived class.

- void derived_map_asynch (const ParamResponsePair &pair)

  asynchronous evaluation that is specific to a derived class.

- void derived_synch (PRPQueue &prp_queue)

  classes. This version waits for at least one completion.

- void derived_synch_nowait (PRPQueue &prp_queue)

  any completions if none are immediately available.

- int derived_synchronous_local_analysis (const int &analysis_id)
- const StringArray & analysis_drivers () const

  retrieve the analysis drivers specification for application interfaces

Protected Member Functions

- virtual int derived_map_if (const Dakota::String &if_name)

  execute the input filter portion of a direct evaluation invocation

- virtual int derived_map_ac (const Dakota::String &ac_name)

  execute an analysis code portion of a direct evaluation invocation

- virtual int derived_map_of (const Dakota::String &of_name)

  execute the output filter portion of a direct evaluation invocation

- void set_local_data (const Variables &vars, const ActiveSet &set, const Response &response)

  variable and response attributes

- void overlay_response (Response &response)

  response contributions from multiple analyses using MPI_Reduce

Protected Attributes

- String iFilterName

  name of the direct function input filter

- String oFilterName

  name of the direct function output filter

- driver_t iFilterType

  enum type of the direct function input filter

- driver_t oFilterType

  enum type of the direct function output filter

- bool gradFlag

  signals use of fnGrads in direct simulator functions

- bool hessFlag

  signals use of fnHessians in direct simulator functions

- size_t numFns

  number of functions in fnVals

- size_t numVars

  total number of continuous and discrete variables

- size_t numACV

  total number of continuous variables

- size_t numADIV

  total number of discete integer variables

- size_t numADRV

  total number of discete real variables

- size_t numDerivVars

  number of active derivative variables

- unsigned short localDataView

  see enum local_data_t

- RealVector xC

  continuous variables used within direct simulator fns

- IntVector xDI

  discrete int variables used within direct simulator fns

- RealVector xDR

  discrete real variables used within direct simulator fns

- StringMultiArray xCLabels

  continuous variable labels

- StringMultiArray xDILabels

  discrete integer variable labels

- StringMultiArray xDRLabels

  discrete real variable labels

- std::map< String, var_t > varTypeMap

  map from variable label to enum

- std::map< String, driver_t > driverTypeMap

  map from driver name to enum

- std::map< var_t, Real > xCM

  map from var_t enum to continuous value

- std::map< var_t, int > xDIM

  map from var_t enum to discrete int value

- std::map< var_t, Real > xDRM

  map from var_t enum to discrete real value

- std::vector< var_t > varTypeDVV

  var_t enumerations corresponding to DVV components

- std::vector< var_t > xCMLabels

var_t enumerations corresponding to continuous variable labels

- std::vector< var_t > xDIMLabels

  var_t enumerations corresponding to discrete integer variable labels

- std::vector< var_t > xDRMLabels

  var_t enumerations corresponding to discrete real variable labels

- ShortArray directFnASV

  class scope active set vector

- SizetArray directFnDVV

  class scope derivative variables vector

- RealVector fnVals

  response fn values within direct simulator fns

- RealMatrix fnGrads

  response fn gradients w/i direct simulator fns

- RealSymMatrixArray fnHessians

  response fn Hessians within direct fns

- StringArray analysisDrivers

  analysis_drivers interface specification)

- std::vector< driver_t > analysisDriverTypes

  conversion of analysisDrivers to driver_t

- size_t analysisDriverIndex

  the index of the active analysis driver within analysisDrivers

- String2DArray analysisComponents

  (from the analysis_components interface specification)

- engine * matlabEngine

  pointer to the MATLAB engine used for direct evaluations

Private Member Functions

- int cantilever ()

  scaled cantilever test function for optimization

- int mod_cantilever ()

  unscaled cantilever test function for UQ

- int cyl_head ()

  the cylinder head constrained optimization test fn

- int multimodal ()

  multimodal UQ test function

- int rosenbrock ()

  the Rosenbrock optimization and least squares test fn

- int generalized_rosenbrock ()

  n-dimensional Rosenbrock (Schittkowski)

- int extended_rosenbrock ()

  n-dimensional Rosenbrock (Nocedal/Wright)

- int log_ratio ()

  the log_ratio UQ test function

- int short_column ()

  the short_column UQ/OUU test function

- int steel_column_cost ()

  the steel_column_cost UQ/OUU test function

- int steel_column_perf ()

  the short_column_perf UQ/OUU test function

- int sobol_rational ()

  Sobol SA rational test function.

- int sobol_g_function ()

  Sobol SA discontinuous test function.

- int sobol_ishigami ()

  Sobol SA transcendental test function.

- int text_book ()

  the text_book constrained optimization test function

- int text_book1 ()

  portion of text_book() evaluating the objective fn

- int text_book2 ()

  portion of text_book() evaluating constraint 1

- int text_book3 ()

  portion of text_book() evaluating constraint 2

- int text_book_ouu ()

  the text_book_ouu OUU test function

- int salinas ()

  direct interface to the SALINAS structural dynamics code

- int mc_api_run ()

  direct interface to ModelCenter via API, HKIM 4/3/03

- int matlab_engine_run ()

  direct interface to Matlab via API, BMA 11/28/05

- int matlab_field_prep (mxArray ∗dakota_matlab, const char ∗field_name)

  add if necessary; free structure memory in preparation for new alloc

- int python_run ()

  direct interface to Python via API, BMA 07/02/07

- template<class ArrayT, class Size> bool python_convert_int (const ArrayT &src, Size size, PyObject ∗∗dst)

  convert arrays of integer types to Python list or numpy array

- bool python_convert (const RealVector &src, PyObject ∗∗dst)

  convert RealVector to Python list or numpy array

- bool python_convert (const RealVector &c_src, const IntVector &di_src, const RealVector &dr_src, PyObject ∗∗dst)

  or numpy double array

- bool python_convert (const StringMultiArray &src, PyObject ∗∗dst)

  convert labels

- bool python_convert (const StringMultiArray &c_src, const StringMultiArray &di_src, const StringMultiArray &dr_src, PyObject ∗∗dst)

  convert all labels to single list

- bool python_convert (PyObject ∗pyv, RealVector &rv, const int &dim)

  RealVector (for fns).

- bool python_convert (PyObject ∗pyv, double ∗rv, const int &dim)

  double[], for use as helper in converting gradients

- bool python_convert (PyObject ∗pym, RealMatrix &rm)

to RealMatrix (for gradients)

- bool python_convert (PyObject *pym, RealSymMatrix &rm)

  to RealMatrix (used as helper in Hessian conversion)

- bool python_convert (PyObject *pyma, RealSymMatrixArray &rma)

  [numpy array of double] to RealSymMatrixArray (for Hessians)

Private Attributes

- bool userNumpyFlag

  whether the user requested numpy data structures

8.34.1 Detailed Description

and testers using direct procedure calls.

DirectApplicInterface uses a few linkable simulation codes and several internal member functions to perform parameter to response mappings.

8.34.2 Member Function Documentation

8.34.2.1 int derived_synchronous_local_analysis (const int & *analysis_id*) `[inline, virtual]`

This code provides the derived function used by ApplicationInterface::serve_analyses_synch().

Reimplemented from ApplicationInterface.

8.34.2.2 int derived_map_ac (const Dakota::String & *ac_name*) `[protected, virtual]`

execute an analysis code portion of a direct evaluation invocation

When a direct analysis/filter is a member function, the (vars,set,response) data does not need to be passed through the API. If, however, non-member analysis/filter functions are added, then pass (vars,set,response) through to the non-member fns:

```
// API declaration
int sim(const Variables& vars, const ActiveSet& set, Response& response);
// use of API within derived_map_ac()
if (ac_name == "sim")
  fail_code = sim(directFnVars, directFnActSet, directFnResponse);
```

Reimplemented in ParallelDirectApplicInterface, and SerialDirectApplicInterface.

8.34.2.3 bool python_convert_int (const ArrayT & *src*, Size *sz*, PyObject ** *dst*) [private]

convert arrays of integer types to Python list or numpy array

convert all integer array types including IntVector, ShortArray, and SizetArray to Python list of ints or numpy array of ints

The documentation for this class was generated from the following files:

- DirectApplicInterface.H
- DirectApplicInterface.C

8.35 DOTOptimizer Class Reference

Wrapper class for the DOT optimization library.

Inheritance diagram for DOTOptimizer::



Public Member Functions

- DOTOptimizer (Model &model)

  standard constructor

- DOTOptimizer (NoDBBaseConstructor, Model &model)

  alternate constructor

- ~DOTOptimizer ()

  destructor

- void find_optimum ()

  Redefines the run virtual function for the optimizer branch.

Protected Member Functions

- void initialize_run ()

  performs run-time set up

Private Member Functions

- void initialize ()

  Shared constructor code.

- void allocate_workspace ()

  Allocates workspace for the optimizer.

- void allocate_constraints ()

  Allocates constraint mappings.

Private Attributes

- int dotInfo

  INFO from DOT manual.

- int dotFDSinfo

  internal DOT parameter NGOTOZ

- int dotMethod

  METHOD from DOT manual.

- int printControl

  IPRINT from DOT manual (controls output verbosity).

- int optimizationType

  MINMAX from DOT manual (minimize or maximize).

- RealArray realCntlParmArray

  RPRM from DOT manual.

- IntArray intCntlParmArray

  IPRM from DOT manual.

- RealVector designVars

  array of design variable values passed to DOT

- Real objFnValue

  value of the objective function passed to DOT

- RealVector constraintValues

  array of nonlinear constraint values passed to DOT

- int realWorkSpaceSize

  size of realWorkSpace

- int intWorkSpaceSize

  size of intWorkSpace

- RealArray realWorkSpace

  real work space for DOT

- IntArray intWorkSpace

  int work space for DOT

- int numDotNlnConstr

  total number of nonlinear constraints seen by DOT

- int numDotLinConstr

  total number of linear constraints seen by DOT

- int numDotConstr

  total number of linear and nonlinear constraints seen by DOT

- SizetArray constraintMappingIndices

  Response constraints used in computing the DOT constraints.

- RealArray constraintMappingMultipliers

  the DOT constraints.

- RealArray constraintMappingOffsets

  DOT constraints.

8.35.1 Detailed Description

Wrapper class for the DOT optimization library.

The DOTOptimizer class provides a wrapper for DOT, a commercial Fortran 77 optimization library from Vanderplaats Research and Development. It uses a reverse communication mode, which avoids the static member function issues that arise with function pointer designs (see NPSOLOptimizer and SNLLOptimizer).

The user input mappings are as follows: `max_iterations` is mapped into DOT's `ITMAX` parameter within its `IPRM` array, `max_function_evaluations` is implemented directly in the find_optimum() loop since there is no DOT parameter equivalent, `convergence_tolerance` is mapped into DOT's `DELOBJ` parameter (the relative convergence tolerance) within its `RPRM` array, `output` verbosity is mapped into DOT's `IPRINT` parameter within its function call parameter list (verbose: `IPRINT` = 7; quiet: `IPRINT` = 3), and `optimization_type` is mapped into DOT's `MINMAX` parameter within its function call parameter list. Refer to [Vanderplaats Research and Development, 1995] for information on `IPRM`, `RPRM`, and the DOT function call parameter list.

8.35.2 Member Data Documentation

8.35.2.1 int dotInfo [private]

INFO from DOT manual.

Information requested by DOT: 0=optimization complete, 1=get values, 2=get gradients

8.35.2.2 int dotFDSinfo [private]

internal DOT parameter NGOTOZ

the DOT parameter list has been modified to pass NGOTOZ, which signals whether DOT is finite-differencing (nonzero value) or performing the line search (zero value).

8.35.2.3 int dotMethod [private]

METHOD from DOT manual.

For nonlinear constraints: 0/1 = dot_mmfd, 2 = dot_slp, 3 = dot_sqp. For unconstrained: 0/1 = dot_bfgs, 2 = dot_frcg.

8.35.2.4 int printControl [private]

IPRINT from DOT manual (controls output verbosity).

Values range from 0 (least output) to 7 (most output).

8.35.2.5 int optimizationType [private]

MINMAX from DOT manual (minimize or maximize).

Values of 0 or -1 (minimize) or 1 (maximize).

8.35.2.6 RealArray realCntlParmArray [private]

RPRM from DOT manual.

Array of real control parameters.

8.35.2.7 IntArray intCntlParmArray [private]

IPRM from DOT manual.

Array of integer control parameters.

8.35.2.8 RealVector constraintValues [private]

array of nonlinear constraint values passed to DOT

This array must be of nonzero length and must contain only one-sided inequality constraints which are <= 0 (which requires a transformation from 2-sided inequalities and equalities).

8.35.2.9 SizetArray constraintMappingIndices [private]

Response constraints used in computing the DOT constraints.

The length of the container corresponds to the number of DOT constraints, and each entry in the container points to the corresponding DAKOTA constraint.

8.35.2.10 RealArray constraintMappingMultipliers [private]

the DOT constraints.

The length of the container corresponds to the number of DOT constraints, and each entry in the container stores a multiplier for the DAKOTA constraint identified with constraintMappingIndices. These multipliers are currently +1 or -1.

8.35.2.11 RealArray constraintMappingOffsets [private]

DOT constraints.

The length of the container corresponds to the number of DOT constraints, and each entry in the container stores an offset for the DAKOTA constraint identified with constraintMappingIndices. These offsets involve inequality bounds or equality targets, since DOT assumes constraint allowables = 0.

The documentation for this class was generated from the following files:

- DOTOptimizer.H
- DOTOptimizer.C

8.36 EffGlobalMinimizer Class Reference

Implementation of Efficient Global Optimization/Least Squares algorithms.

Inheritance diagram for EffGlobalMinimizer::



Public Member Functions

- EffGlobalMinimizer (Model &model)

  standard constructor

- ~EffGlobalMinimizer ()

  alternate constructor for instantiations "on the fly" destructor

- void minimize_surrogates ()

  approach. Redefines the Iterator::run() virtual function.

Private Member Functions

- void minimize_surrogates_on_model ()

  called by minimize_surrogates for setUpType == "model"

- void get_best_sample ()

  imporovement function

- Real expected_improvement (const RealVector &means, const RealVector &variances)

  expected improvement function for the GP

- RealVector expected_violation (const RealVector &means, const RealVector &variances)

  expected violation function for the constraint functions

- void update_penalty ()

  initialize and update the penaltyParameter

- Real rel_change_c_star (const RealVector &curr_c_star, const RealVector &prev_c_star)

  Computes relative change between successive c_stars using Euclidean norm.

Static Private Member Functions

- static void EIF_objective_eval (const Variables &sub_model_vars, const Variables &recast_vars, const Response &sub_model_response, Response &recast_response)

  Expected Improvement (EIF) problem formulation for PMA.

Private Attributes

- String setUpType

  (user-supplied functions mode for "on the fly" instantiations).

- Model fHatModel

  GP model of response, one approximation per response function.

- Model eifModel

  max(EIF) sub-problem

- Real meritFnStar

  minimum penalized response from among true function evaluations

- RealVector truthFnStar

  true function values corresponding to the minimum penalized response

- RealVector varStar

  point that corresponds to the optimal value meritFnStar

Static Private Attributes

- static EffGlobalMinimizer * effGlobalInstance

  functions in order to avoid the need for static data

8.36.1 Detailed Description

Implementation of Efficient Global Optimization/Least Squares algorithms.

The EffGlobalMinimizer class provides an implementation of the Efficient Global Optimization algorithm developed by Jones, Schonlau, & Welch as well as adaptation of the concept to nonlinear least squares.

8.36.2 Constructor & Destructor Documentation

8.36.2.1 ~EffGlobalMinimizer ()

alternate constructor for instantiations "on the fly" destructor

This is an alternate constructor for instantiations on the fly using a Model but no ProblemDescDB.

The documentation for this class was generated from the following files:

- EffGlobalMinimizer.H
- EffGlobalMinimizer.C

8.37 EmbeddedHybridStrategy Class Reference

search methods.

Inheritance diagram for EmbeddedHybridStrategy::



Public Member Functions

- EmbeddedHybridStrategy (ProblemDescDB &problem_db)

  constructor

- ~EmbeddedHybridStrategy ()

  destructor

Protected Member Functions

- void run_strategy ()

  iterators on different models of varying fidelity

- const Variables & variables_results () const

  return the final solution from selectedIterators (variables)

- const Response & response_results () const

  return the final solution from selectedIterators (response)

Private Attributes

- Real localSearchProb

  phases of the global minimization for coupled hybrids

8.37.1 Detailed Description

search methods.

This strategy uses multiple methods in close coordination, generally using a local search minimizer repeatedly within a global minimizer (the local search minimizer refines candidate minima which are fed back to the global minimizer).

The documentation for this class was generated from the following files:

- EmbeddedHybridStrategy.H
- EmbeddedHybridStrategy.C

8.38 ErrorTable Struct Reference

Data structure to hold errors.

Public Attributes

- CtelRegexp::RStatus rc

  Enumerated type to hold status codes.

- const char * msg

  Holds character string error message.

8.38.1 Detailed Description

Data structure to hold errors.

This module implements a C++ wrapper for Regular Expressions based on the public domain engine for regular expressions released by: Copyright (c) 1986 by University of Toronto. Written by Henry Spencer. Not derived from licensed software.

The documentation for this struct was generated from the following file:

- CtelRegExp.C

8.39 ForkAnalysisCode Class Reference

simulations using forks.

Inheritance diagram for ForkAnalysisCode::



Public Member Functions

- ForkAnalysisCode (const ProblemDescDB &problem_db)

  constructor

- ~ForkAnalysisCode ()

  destructor

- pid_t fork_program (const bool block_flag)

  for completion using waitpid() if block_flag is true

- void check_status (const int status)

  error code was returned

- void ifilter_argument_list ()

  set argList for execution of the input filter

- void ofilter_argument_list ()

  set argList for execution of the output filter

- void driver_argument_list (const int analysis_id)

  set argList for execution of the specified analysis driver

Private Attributes

- std::vector< std::string > argList

  These are converted to an array of const char∗'s in fork_program().

8.39.1 Detailed Description

simulations using forks.

ForkAnalysisCode creates a copy of the parent DAKOTA process using fork()/vfork() and then replaces the copy with a simulation process using execvp(). The parent process can then use waitpid() to wait on completion of the simulation process.

8.39.2 Member Function Documentation

8.39.2.1 void check_status (const int *status*)

error code was returned

Check to see if the process terminated abnormally (WIFEXITED(status)==0) or if either execvp or the application returned a status code of -1 (WIFEXITED(status)!=0 && (signed char)WEXITSTATUS(status)==-1). If one of these conditions is detected, output a failure message and abort. Note: the application code should not return a status code of -1 unless an immediate abort of dakota is wanted. If for instance, failure capturing is to be used, the application code should write the word "FAIL" to the appropriate results file and return a status code of 0 through exit().

The documentation for this class was generated from the following files:

- ForkAnalysisCode.H
- ForkAnalysisCode.C

8.40 ForkApplicInterface Class Reference

using forks.

Inheritance diagram for ForkApplicInterface::



Public Member Functions

- ForkApplicInterface (const ProblemDescDB &problem_db)

  constructor

- ~ForkApplicInterface ()

  destructor

- void derived_map (const Variables &vars, const ActiveSet &set, Response &response, int fn_eval_id)

  that is specific to a derived class.

- void derived_map_asynch (const ParamResponsePair &pair)

  asynchronous evaluation that is specific to a derived class.

- void derived_synch (PRPQueue &prp_queue)

  classes. This version waits for at least one completion.

- void derived_synch_nowait (PRPQueue &prp_queue)

  any completions if none are immediately available.

- int derived_synchronous_local_analysis (const int &analysis_id)
- const StringArray & analysis_drivers () const

  retrieve the analysis drivers specification for application interfaces

- const AnalysisCode * analysis_code () const

  return AnalysisCode::fileNameMap when defined for derived Interface class

Private Member Functions

- void derived_synch_kernel (PRPQueue &prp_queue, const pid_t pid)

derived_synch_nowait()

- pid_t fork_application (const bool block_flag)
  filter, analysis programs, and output filter
- void asynchronous_local_analyses (const int &start, const int &end, const int &step)
  execute analyses asynchronously on the local processor
- void synchronous_local_analyses (const int &start, const int &end, const int &step)
  execute analyses synchronously on the local processor
- void serve_analyses_asynch ()
  serve the analysis scheduler and execute analysis jobs asynchronously

Private Attributes

- ForkAnalysisCode forkSimulator
  individual programs and checking fork exit status
- std::map< pid_t, int > processIdMap
  asynchronous evaluations

8.40.1 Detailed Description

using forks.

ForkApplicInterface uses a ForkAnalysisCode object for performing simulation invocations.

8.40.2 Member Function Documentation

8.40.2.1 int derived_synchronous_local_analysis (const int & *analysis_id*) `[inline, virtual]`

This code provides the derived function used by ApplicationInterface:: serve_analyses_synch() as well as a convenience function for ForkApplicInterface::synchronous_local_analyses() below.

Reimplemented from ApplicationInterface.

8.40.2.2 pid_t fork_application (const bool *block_flag*) `[private]`

filter, analysis programs, and output filter

Manage the input filter, 1 or more analysis programs, and the output filter in blocking or nonblocking mode as governed by block_flag. In the case of a single analysis and no filters, a single fork is performed, while in other cases, an initial fork is reforked multiple times. Called from derived_map() with block_flag == BLOCK and from derived_map_asynch() with block_flag == FALL_THROUGH. Uses ForkAnalysisCode::fork_program() to spawn individual program components within the function evaluation.

8.40.2.3 void asynchronous_local_analyses (const int & *start*, const int & *end*, const int & *step*) [private]

execute analyses asynchronously on the local processor

Schedule analyses asynchronously on the local processor using a self-scheduling approach (start to end in step increments). Concurrency is limited by asynchLocalAnalysisConcurrency. Modeled after Application-Interface::asynchronous_local_evaluations(). NOTE: This function should be elevated to ApplicationInterface if and when another derived interface class supports asynchronous local analyses.

8.40.2.4 void synchronous_local_analyses (const int & *start*, const int & *end*, const int & *step*) [inline, private]

execute analyses synchronously on the local processor

Execute analyses synchronously in succession on the local processor (start to end in step increments). Modeled after ApplicationInterface::synchronous_local_evaluations().

8.40.2.5 void serve_analyses_asynch () [private]

serve the analysis scheduler and execute analysis jobs asynchronously

This code runs multiple asynch analyses on each server. It is modeled after ApplicationInterface::serve_-evaluations_asynch(). NOTE: This fn should be elevated to ApplicationInterface if and when another derived interface class supports hybrid analysis parallelism.

The documentation for this class was generated from the following files:

- ForkApplicInterface.H
- ForkApplicInterface.C

8.41 FSUDesignCompExp Class Reference

Wrapper class for the FSUDace QMC/CVT library.

Inheritance diagram for FSUDesignCompExp::



Public Member Functions

- FSUDesignCompExp (Model &model)

  primary constructor for building a standard DACE iterator

- FSUDesignCompExp (Model &model, int samples, int seed, const String &sampling_method)

  alternate constructor for building a DACE iterator on-the-fly

- ~FSUDesignCompExp ()

  destructor

- void pre_run ()

  which can generate all Variables (parameter sets) a priori

- void extract_trends ()

  Redefines the run_iterator virtual function for the PStudy/DACE branch.

- void post_input ()

  read tabular data for post-run mode

- void post_run (std::ostream &s)

  perform final analysis phase in a standalone way

- int num_samples () const

  get the current number of samples

- void sampling_reset (int min_samples, bool all_data_flag, bool stats_flag)

  reset sampling iterator to use at least min_samples

- const String & sampling_scheme () const

  return sampling name

- void vary_pattern (bool pattern_flag)

  sets varyPattern in derived classes that support it

- void get_parameter_sets (Model &model)

  Returns one block of samples (ndim ∗ num_samples).

Private Member Functions

- void enforce_input_rules ()

  enforce sanity checks/modifications for the user input specification

Private Attributes

- int samplesSpec

  initial specification of number of samples

- int numSamples

  current number of samples to be evaluated

- bool allDataFlag

  Iterator::all_variables() and Iterator::all_responses().

- size_t numDACERuns

  counter for number of run() executions for this object

- bool latinizeFlag

  flag which specifies latinization of QMC or CVT sample sets

- IntVector sequenceStart

  variable sampled. Default is 0 0 0 (e.g. for three random variables).

- IntVector sequenceLeap

  generated. Default is 1 1 1 (e.g. for three random vars.)

- IntVector primeBase

  generated. Default is 2 3 5 (e.g., for three random vars.)

- int seedSpec

  (allows repeatable results)

- int randomSeed

  current seed for the random number generator

- bool varyPattern

  multiple executions are repeatable but not identical.

- int numCVTTrials

  specifies the number of sample points taken at internal CVT iteration

- int trialType

  halton (1), uniform (0), or random (-1). Default is random.

8.41.1 Detailed Description

Wrapper class for the FSUDace QMC/CVT library.

The FSUDesignCompExp class provides a wrapper for FSUDace, a C++ design of experiments library from Florida State University. This class uses quasi Monte Carlo (QMC) and Centroidal Voronoi Tesselation (CVT) methods to uniformly sample the parameter space spanned by the active bounds of the current Model. It returns all generated samples and their corresponding responses as well as the best sample found.

8.41.2 Constructor & Destructor Documentation

8.41.2.1 FSUDesignCompExp (Model & *model*)

primary constructor for building a standard DACE iterator

This constructor is called for a standard iterator built with data from probDescDB.

8.41.2.2 FSUDesignCompExp (Model & *model*, int *samples*, int *seed*, const String & *sampling_method*)

alternate constructor for building a DACE iterator on-the-fly

This alternate constructor is used for instantiations on-the-fly, using only the incoming data. No problem description database queries are used.

8.41.3 Member Function Documentation

8.41.3.1 void pre_run () `[virtual]`

which can generate all Variables (parameter sets) a priori

pre-run phase, which a derived iterator may optionally reimplement; when not present, pre-run is likely integrated into the derived run function. This is a virtual function; when re-implementing, a derived class must call its nearest parent's pre_run(), if implemented, typically _before_ performing its own implementation steps.

Reimplemented from Iterator.

8.41.3.2 void post_run (std::ostream & *s*) [virtual]

perform final analysis phase in a standalone way

Post-run phase, which a derived iterator may optionally reimplement; when not present, post-run is likely integrated into run. This is a virtual function; when re-implementing, a derived class must call its nearest parent's post_run(), typically _after_ performing its own implementation steps.

Reimplemented from Iterator.

8.41.3.3 int num_samples () const [inline, virtual]

get the current number of samples

Return current number of evaluation points. Since the calculation of samples, collocation points, etc. might be costly, provide a default implementation here that backs out from the maxConcurrency. May be (is) overridden by derived classes.

Reimplemented from Iterator.

8.41.3.4 void enforce_input_rules () [private]

enforce sanity checks/modifications for the user input specification

Users may input a variety of quantities, but this function must enforce any restrictions imposed by the sampling algorithms.

The documentation for this class was generated from the following files:

- FSUDesignCompExp.H
- FSUDesignCompExp.C

8.42 GaussProcApproximation Class Reference

Derived approximation class for Gaussian Process implementation.

Inheritance diagram for GaussProcApproximation::



Public Member Functions

- GaussProcApproximation ()
  default constructor
- GaussProcApproximation (size_t num_vars, unsigned short data_order)
  alternate constructor
- GaussProcApproximation (const ProblemDescDB &problem_db, const size_t &num_acv)
  standard constructor
- ~GaussProcApproximation ()
  destructor

Protected Member Functions

- int min_coefficients () const
  build the derived class approximation type in numVars dimensions
- int num_constraints () const
  return the number of constraints to be enforced via anchorPoint
- void build ()
  find the covariance parameters governing the Gaussian process response
- const Real & get_value (const RealVector &x)
  retrieve the function value for a given parameter set x
- const Real & get_prediction_variance (const RealVector &x)
  retrieve the variance of the predicted value for a given parameter set x
- const RealVector & get_gradient (const RealVector &x)
  for a given parameter set x

Private Member Functions

- void GPmodel_build ()

  Function to compute hyperparameters governing the GP.

- void GPmodel_apply (const RealVector &new_x, bool variance_flag, bool gradients_flag)

  Function returns a response value using the GP surface.

- void normalize_training_data ()

  Normalizes the initial inputs upon which the GP surface is based.

- void get_trend ()

  linear, if order = 2, trend is quadratic.

- void get_beta_coefficients ()

  Gets the beta coefficients for the calculation of the mean of the GP.

- int get_cholesky_factor ()

  error checking

- void get_process_variance ()

  the correlation lengthscales

- void get_cov_matrix ()

  calculates the covariance matrix for a given set of input points

- void get_cov_vector ()

  set of inputs upon which the GP is based

- void optimize_theta_global ()

  parameters using NCSUDirect

- void optimize_theta_multipoint ()

  parameters using a gradient-based solver and multiple starting points

- void predict (bool variance_flag, bool gradients_flag)

  Calculates the predicted new response value for x in normalized space.

- Real calc_nll ()

  matrix)

- void calc_grad_nll ()

  to the correlation lengthscales, theta

- void get_grad_cov_vector ()

  to each componeent of x.

- void run_point_selection ()

  estimate the necessary parameters

- void initialize_point_selection ()

  initial subset of the training points

- void pointsel_get_errors (RealArray &delta)

  training points and find the errors

- int addpoint (int, IntArray &added_index)

  Adds a point to the effective training set. Returns 1 on success.

- int pointsel_add_sel (const RealArray &delta)

  them

- Real maxval (const RealArray &) const

  Return the maximum value of the elements in a vector.

- void pointsel_write_points ()

  Writes out the training set before and after point selection.

- void lhood_2d_grid_eval ()

  likelihood on a grid

- void writex (const char[ ])

  specified file

- void writeCovMat (char[ ])

  Writes out the covariance matrix to a specified file.

Static Private Member Functions

- static void negloglik (int mode, int n, const NEWMAT::ColumnVector &X, NEWMAT::Real &fx, NEWMAT::ColumnVector &grad_x, int &result_mode)

  by minimizing the negative log likelihood

- static void constraint_eval (int mode, int n, const NEWMAT::ColumnVector &X, NEWMAT::ColumnVector &g, NEWMAT::Matrix &gradC, int &result_mode)

  this function is empty: it is an unconstrained optimization.

- static double negloglikNCSU (const RealVector &x)

  function used by NCSUOptimizer to optimize negloglik objective

Private Attributes

- RealMatrix trainPoints

  used to create the Gaussian process

- RealMatrix trainValues

  An array of response values; one response value per sample site.

- RealVector trainMeans

  The mean of the input columns of trainPoints.

- RealVector trainStdvs

  The standard deviation of the input columns of trainPoints.

- RealMatrix normTrainPoints

  Current working set of normalized points upon which the GP is based.

- RealMatrix trendFunction

  matrix to hold the trend function

- RealMatrix betaCoeffs

  matrix to hold the beta coefficients for the trend function

- RealSymMatrix covMatrix

  between points Xi and Xj in the initial set of samples

- RealMatrix covVector

  between a new point X and point Xj from the initial set of samples

- RealMatrix approxPoint

  single point, but it could be generalized to be a vector of points.

- RealMatrix gradNegLogLikTheta

  with respect to the theta correlation terms

- Teuchos::SerialSpdDenseSolver< int, Real > covSlvr

  the covariance matrix

- RealMatrix gradCovVector

  with respect to a particular componenet of X

- RealMatrix normTrainPointsAll

  Set of all original samples available.

- RealMatrix trainValuesAll

  All original samples available.

- RealMatrix trendFunctionAll

  Trend function values corresponding to all original samples.

- RealMatrix Rinv_YFb

  Matrix for storing inverse of correlation matrix Rinv∗(Y-FB).

- size_t numObs

  The number of observations on which the GP surface is built.

- size_t numObsAll

  The original number of observations.

- short trendOrder

  linear, if order = 2, trend is quadratic.

- RealVector thetaParams

  same point. sige is the underlying process error.

- Real procVar

  The process variance, the multiplier of the correlation matrix.

- IntArray pointsAddedIndex

  all points which have been added

- int cholFlag

  A global indicator for success of the Cholesky factorization.

- bool usePointSelection

  a flag to indicate the use of point selection

Static Private Attributes

- static GaussProcApproximation ∗ GPinstance

  pointer to the active object instance used within the static evaluator

8.42.1 Detailed Description

Derived approximation class for Gaussian Process implementation.

The GaussProcApproximation class provides a global approximation (surrogate) based on a Gaussian process. The Gaussian process is built after normalizing the function values, with zero mean. Opt++ is used to determine the optimal values of the covariance parameters, those which minimize the negative log likelihood function.

8.42.2 Constructor & Destructor Documentation

8.42.2.1 GaussProcApproximation () [inline]

default constructor

alternate constructor used by EffGlobalOptimization and NonDGlobalReliability that does not use a problem database defaults here are no point selectinn and quadratic trend function.

8.42.3 Member Function Documentation

8.42.3.1 void GPmodel_apply (const RealVector & *new_x*, bool *variance_flag*, bool *gradients_flag*) [private]

Function returns a response value using the GP surface.

The response value is computed at the design point specified by the RealVector function argument.

The documentation for this class was generated from the following files:

- GaussProcApproximation.H
- GaussProcApproximation.C

8.43 GetLongOpt Class Reference

(Advanced Computer Research Institute, Lyon, France).

Inheritance diagram for GetLongOpt::



Public Types

- enum OptType { Valueless, OptionalValue, MandatoryValue }
  enum for different types of values associated with command line options.

Public Member Functions

- GetLongOpt (const char optmark= '-')
  Constructor.
- ~GetLongOpt ()
  Destructor.
- int parse (int argc, char *const *argv)
  parse the command line args (argc, argv).
- int parse (char *const str, char *const p)
  parse a string of options (typically given from the environment).
- int enroll (const char *const opt, const OptType t, const char *const desc, const char *const val)
  Add an option to the list of valid command options.
- const char * retrieve (const char *const opt) const
  Retrieve value of option.
- void usage (std::ostream &outfile=Cout) const
  Print usage information to outfile.
- void usage (const char *str)
  Change header of usage output to str.
- void store (const char *name, const char *value)
  Store a specified option value.

Private Member Functions

- char * basename (char *const p) const

  extract the base name from a string as delimited by '/'

- int setcell (Cell *c, char *valtoken, char *nexttoken, const char *p)

  internal convenience function for setting Cell::value

Private Attributes

- Cell * table

  option table

- const char * ustring

  usage message

- char * pname

  program basename

- char optmarker

  option marker

- int enroll_done

  finished enrolling

- Cell * last

  last entry in option table

8.43.1 Detailed Description

(Advanced Computer Research Institute, Lyon, France).

GetLongOpt manages the definition and parsing of "long options." Command line options can be abbreviated as long as there is no ambiguity. If an option requires a value, the value should be separated from the option either by whitespace or an "=".

8.43.2 Member Enumeration Documentation

8.43.2.1 enum OptType

enum for different types of values associated with command line options.

Enumerator:

Valueless option that may never have a value

OptionalValue option with optional value

MandatoryValue option with required value

8.43.3 Constructor & Destructor Documentation

8.43.3.1 GetLongOpt (const char *optmark* = '-')

Constructor.

Constructor for GetLongOpt takes an optional argument: the option marker. If unspecified, this defaults to '-', the standard (?) Unix option marker.

8.43.4 Member Function Documentation

8.43.4.1 int parse (int *argc*, char *const * *argv*)

parse the command line args (argc, argv).

A return value < 1 represents a parse error. Appropriate error messages are printed when errors are seen. parse returns the the optind (see getopt(3)) if parsing is successful.

8.43.4.2 int parse (char *const *str*, char *const *p*)

parse a string of options (typically given from the environment).

A return value < 1 represents a parse error. Appropriate error messages are printed when errors are seen. parse takes two strings: the first one is the string to be parsed and the second one is a string to be prefixed to the parse errors.

8.43.4.3 int enroll (const char *const *opt*, const OptType *t*, const char *const *desc*, const char *const *val*)

Add an option to the list of valid command options.

enroll adds option specifications to its internal database. The first argument is the option sting. The second is an enum saying if the option is a flag (Valueless), if it requires a mandatory value (MandatoryValue) or if it takes an optional value (OptionalValue). The third argument is a string giving a brief description of the option. This description will be used by GetLongOpt::usage. GetLongOpt, for usage-printing, uses {$val} to represent values needed by the options. {<$val>} is a mandatory value and {[$val]} is an optional value. The final argument to enroll is the default string to be returned if the option is not specified. For flags (options with Valueless), use "" (empty string, or in fact any arbitrary string) for specifying TRUE and 0 (null pointer) to specify FALSE.

8.43.4.4 const char * retrieve (const char *const *opt*) const

Retrieve value of option.

The values of the options that are enrolled in the database can be retrieved using retrieve. This returns a string and this string should be converted to whatever type you want. See atoi, atof, atol, etc. If a "parse" is not done before retrieving all you will get are the default values you gave while enrolling! Ambiguities while retrieving

(may happen when options are abbreviated) are resolved by taking the matching option that was enrolled last. For example, -{v} will expand to {-verify}. If you try to retrieve something you didn't enroll, you will get a warning message.

8.43.4.5 void usage (const char * *str*) [inline]

Change header of usage output to str.

GetLongOpt::usage is overloaded. If passed a string "str", it sets the internal usage string to "str". Otherwise it simply prints the command usage.

The documentation for this class was generated from the following files:

- CommandLineHandler.H
- CommandLineHandler.C

8.44 Graphics Class Reference

for post-processing with Matlab, Tecplot, etc.

Public Member Functions

- Graphics ()

  constructor

- ∼Graphics ()

  destructor

- void create_plots_2d (const Variables &vars, const Response &response)

  creates the 2d graphics window and initializes the plots

- void create_tabular_datastream (const Variables &vars, const Response &response, const String &tabular_-data_file)

  opens the tabular data file stream and prints the headings

- void add_datapoint (const Variables &vars, const Response &response)

  the tabular data file based on the results of a model evaluation

- void add_datapoint (int i, double x, double y)

  adds data to a single window in the 2d graphics

- void new_dataset (int i)

  for a single window in the 2d graphics

- void close ()

  close graphics windows and tabular datastream

- void set_x_labels2d (const char ∗x_label)

  set x label for each plot equal to x_label

- void set_y_labels2d (const char ∗y_label)

  set y label for each plot equal to y_label

- void set_x_label2d (int i, const char ∗x_label)

  set x label for ith plot equal to x_label

- void set_y_label2d (int i, const char ∗y_label)

  set y label for ith plot equal to y_label

- void graphics_counter (int cntr)

  set graphicsCntr equal to cntr

- int graphics_counter () const

  return graphicsCntr

- void tabular_counter_label (const String &label)

  set tabularCntrLabel equal to label

Private Attributes

- Graphics2D * graphics2D

  pointer to the 2D graphics object

- bool win2dOn

  flag to indicate if 2D graphics window is active

- bool tabularDataFlag

  flag to indicate if tabular data stream is active

- int graphicsCntr

  used for x axis values in 2D graphics and for 1st column in tabular data

- String tabularCntrLabel

  label for counter used in first line comment w/i the tabular data file

- std::ofstream tabularDataFStream

  file stream for tabulation of graphics data within compute_response

8.44.1 Detailed Description

for post-processing with Matlab, Tecplot, etc.

There is only one Graphics object (dakotaGraphics) and it is global (for convenient access from strategies, models, and approximations).

8.44.2 Member Function Documentation

8.44.2.1 void create_plots_2d (const Variables & *vars*, const Response & *response*)

creates the 2d graphics window and initializes the plots

Sets up a single event loop for duration of the dakotaGraphics object, continuously adding data to a single window. There is no reset. To start over with a new data set, you need a new object (delete old and instantiate new).

8.44.2.2 void create_tabular_datastream (const Variables & *vars*, const Response & *response*, const String & *tabular_data_file*)

opens the tabular data file stream and prints the headings

Opens the tabular data file stream and prints headings, one for each continuous and discrete variable and one for each response function, using the variable and response function labels. This tabular data is used for post-processing of DAKOTA results in Matlab, Tecplot, etc.

8.44.2.3 void add_datapoint (const Variables & *vars*, const Response & *response*)

the tabular data file based on the results of a model evaluation

Adds data to each 2d plot and each tabular data column (one for each active variable and for each response function). graphicsCntr is used for the x axis in the graphics and the first column in the tabular data.

8.44.2.4 void add_datapoint (int *i*, double *x*, double *y*)

adds data to a single window in the 2d graphics

Adds data to a single 2d plot. Allows complete flexibility in defining other kinds of x-y plotting in the 2D graphics.

8.44.2.5 void new_dataset (int *i*)

for a single window in the 2d graphics

Used for displaying multiple data sets within the same plot.

The documentation for this class was generated from the following files:

- DakotaGraphics.H
- DakotaGraphics.C

8.45 GridApplicInterface Class Reference

using grid services such as Condor or Globus.

Inheritance diagram for GridApplicInterface::



Public Member Functions

- GridApplicInterface (const ProblemDescDB &problem_db)
  constructor
- ~GridApplicInterface ()
  destructor
- void derived_map (const Variables &vars, const ActiveSet &set, Response &response, int fn_eval_id)
  that is specific to a derived class.
- void derived_map_asynch (const ParamResponsePair &pair)
  asynchronous evaluation that is specific to a derived class.
- void derived_synch (PRPQueue &prp_queue)
  classes. This version waits for at least one completion.
- void derived_synch_nowait (PRPQueue &prp_queue)
  any completions if none are immediately available.
- int derived_synchronous_local_analysis (const int &analysis_id)
- const StringArray & analysis_drivers () const
  retrieve the analysis drivers specification for application interfaces
- const AnalysisCode * analysis_code () const
  return AnalysisCode::fileNameMap when defined for derived Interface class

Public Attributes

- SysCallAnalysisCode code
  Used to read/write parameter files and responses.

Protected Member Functions

- void derived_synch_kernel (PRPQueue &prp_queue)

  Convenience function for common code between wait and nowait case.

- bool grid_file_test (const String &root_file)

  test file(s) for existence based on root_file name

Protected Attributes

- IntSet idSet

  system call evaluations

- IntShortMap failCountMap

  map linking function evaluation id's to number of response read failures

- start_grid_computing_t start_grid_computing

  handle to dynamically linked start_grid_computing function

- perform_analysis_t perform_analysis

  handle to dynamically linked perform_analysis grid function

- get_jobs_completed_t get_jobs_completed

  handle to dynamically linked get_jobs_completed grid function

- stop_grid_computing_t stop_grid_computing

  handle to dynamically linked stop_grid_computing function

8.45.1 Detailed Description

using grid services such as Condor or Globus.

This class is currently a modified copy of SysCallApplicInterface adapted for use with an external grid dervices library which was dynamically linked using dlopen() services.

8.45.2 Member Function Documentation

8.45.2.1 int derived_synchronous_local_analysis (const int & *analysis_id*) `[inline, virtual]`

This code provides the derived function used by ApplicationInterface::serve_analyses_synch().

TODO - allow local analyses?????

Reimplemented from ApplicationInterface.

The documentation for this class was generated from the following files:

- GridApplicInterface.H
- GridApplicInterface.C

8.46 HierarchSurrModel Class Reference

hierarchical surrogates (models of varying fidelity).

Inheritance diagram for HierarchSurrModel::



Public Member Functions

- HierarchSurrModel (ProblemDescDB &problem_db)

  constructor

- ~HierarchSurrModel ()

  destructor

Protected Member Functions

- void derived_compute_response (const ActiveSet &set)

  portion of compute_response() specific to HierarchSurrModel

- void derived_asynch_compute_response (const ActiveSet &set)

  portion of asynch_compute_response() specific to HierarchSurrModel

- const IntResponseMap & derived_synchronize ()

  portion of synchronize() specific to HierarchSurrModel

- const IntResponseMap & derived_synchronize_nowait ()

  portion of synchronize_nowait() specific to HierarchSurrModel

- Model & surrogate_model ()

  return lowFidelityModel

- Model & truth_model ()

  return highFidelityModel

- void derived_subordinate_models (ModelList &ml, bool recurse_flag)

  return lowFidelityModel and highFidelityModel

- void primary_response_fn_weights (const RealVector &wts, bool recurse_flag=true)

  squares terms and optionally recurses into LF/HF models

- void surrogate_bypass (bool bypass_flag)

  for any lower-level surrogates.

- void surrogate_function_indices (const IntSet &surr_fn_indices)

  (re)set the surrogate index set in SurrogateModel::surrogateFnIndices

- void build_approximation ()

  correction of lowFidelityModel results

- void component_parallel_mode (short mode)

  lowFidelityModel and highFidelityModel

- void derived_init_communicators (const int &max_iterator_concurrency, bool recurse_flag=true)

  set up lowFidelityModel and highFidelityModel for parallel operations

- void derived_init_serial ()

  set up lowFidelityModel and highFidelityModel for serial operations.

- void derived_set_communicators (const int &max_iterator_concurrency, bool recurse_flag=true)

  highFidelityModel

- void derived_free_communicators (const int &max_iterator_concurrency, bool recurse_flag=true)

  (request forwarded to lowFidelityModel and highFidelityModel)

- void serve ()

  stop_servers().

- void stop_servers ()

  HierarchSurrModel is complete.

- void inactive_view (short view, bool recurse_flag=true)

  context and optionally recurse into

- int evaluation_id () const

  Return the current evaluation id for the HierarchSurrModel.

- void set_evaluation_reference ()

  (request forwarded to lowFidelityModel and highFidelityModel)

- void fine_grained_evaluation_counters ()

  and highFidelityModel

- void print_evaluation_summary (std::ostream &s, bool minimal_header=false, bool relative_count=true) const

  (request forwarded to lowFidelityModel and highFidelityModel)

Private Member Functions

- void update_model (Model &model)

  with current variable values/bounds/labels

Private Attributes

- int hierModelEvals

  derived_asynch_compute_response()

- IntResponseMap cachedTruthRespMap

  portions were still pending.

- Model lowFidelityModel

  a data fit surrogate on a low fidelity model).

- Model highFidelityModel

  fidelity results. Model is of arbitrary type and supports recursions.

- Response highFidRefResponse

  and used for calculating corrections.

8.46.1 Detailed Description

hierarchical surrogates (models of varying fidelity).

The HierarchSurrModel class manages hierarchical models of varying fidelity. In particular, it uses a low fidelity model as a surrogate for a high fidelity model. The class contains a lowFidelityModel which performs the approximate low fidelity function evaluations and a highFidelityModel which provides truth evaluations for computing corrections to the low fidelity results.

8.46.2 Member Function Documentation

8.46.2.1 void derived_compute_response (const ActiveSet & *set*) `[protected, virtual]`

portion of compute_response() specific to HierarchSurrModel

Compute the response synchronously using lowFidelityModel, highFidelityModel, or both (mixed case). For the lowFidelityModel portion, compute the high fidelity response if needed with build_approximation(), and, if correction is active, correct the low fidelity results.

Reimplemented from Model.

8.46.2.2 void derived_asynch_compute_response (const ActiveSet & *set*) [protected, virtual]

portion of asynch_compute_response() specific to HierarchSurrModel

Compute the response asynchronously using lowFidelityModel, highFidelityModel, or both (mixed case). For the lowFidelityModel portion, compute the high fidelity response with build_approximation() (for correcting the low fidelity results in derived_synchronize() and derived_synchronize_nowait()) if not performed previously.

Reimplemented from Model.

8.46.2.3 const IntResponseMap & derived_synchronize () [protected, virtual]

portion of synchronize() specific to HierarchSurrModel

Blocking retrieval of asynchronous evaluations from lowFidelityModel, highFidelityModel, or both (mixed case). For the lowFidelityModel portion, apply correction (if active) to each response in the array. derived_synchronize() is designed for the general case where derived_asynch_compute_response() may be inconsistent in its use of low fidelity evaluations, high fidelity evaluations, or both.

Reimplemented from Model.

8.46.2.4 const IntResponseMap & derived_synchronize_nowait () [protected, virtual]

portion of synchronize_nowait() specific to HierarchSurrModel

Nonblocking retrieval of asynchronous evaluations from lowFidelityModel, highFidelityModel, or both (mixed case). For the lowFidelityModel portion, apply correction (if active) to each response in the map. derived_synchronize_nowait() is designed for the general case where derived_asynch_compute_response() may be inconsistent in its use of actual evals, approx evals, or both.

Reimplemented from Model.

8.46.2.5 int evaluation_id () const [inline, protected, virtual]

Return the current evaluation id for the HierarchSurrModel.

return the hierarchical model evaluation count. Due to possibly intermittent use of surrogate bypass, this is not the same as either the loFi or hiFi model evaluation counts. It also does not distinguish duplicate evals.

Reimplemented from Model.

The documentation for this class was generated from the following files:

- HierarchSurrModel.H
- HierarchSurrModel.C

8.47 HybridStrategy Class Reference

Base class for hybrid minimization strategies.

Inheritance diagram for HybridStrategy::

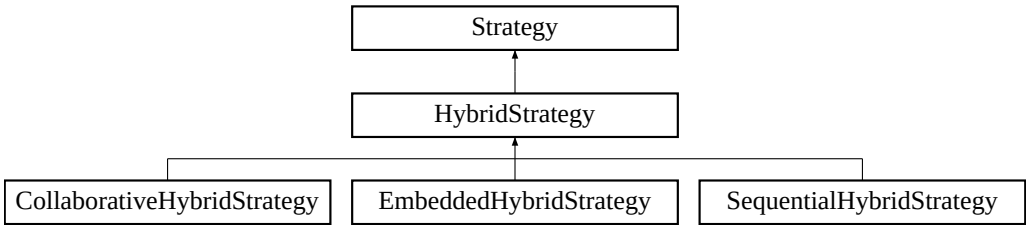

Protected Member Functions

- HybridStrategy (ProblemDescDB &problem_db)

  constructor

- ~HybridStrategy ()

  destructor

- void allocate_methods ()

  initialize selectedIterators and userDefinedModels

- void deallocate_methods ()

  free communicators for selectedIterators and userDefinedModels

Protected Attributes

- StringArray methodList

  the list of method identifiers

- int numIterators

  number of methods in methodList

- IteratorArray selectedIterators

  the set of iterators, one for each entry in methodList

- ModelArray userDefinedModels

  the set of models, one for each iterator

8.47.1 Detailed Description

Base class for hybrid minimization strategies.

This base class shares code for three approaches to hybrid minimization: (1) the sequential hybrid; (2) the embedded hybrid; and (3) the collaborative hybrid.

The documentation for this class was generated from the following files:

- HybridStrategy.H
- HybridStrategy.C

8.48 Interface Class Reference

Base class for the interface class hierarchy.

Inheritance diagram for Interface::

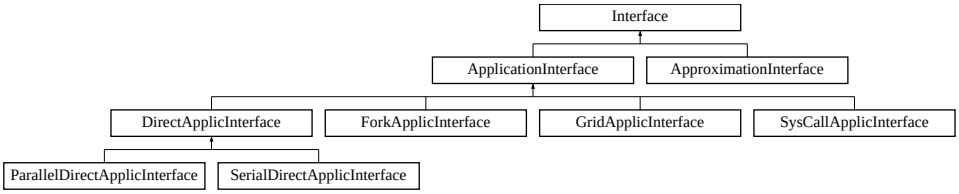

Public Member Functions

- Interface ()

  default constructor

- Interface (ProblemDescDB &problem_db)

  standard constructor for envelope

- Interface (const Interface &interface)

  copy constructor

- virtual ~Interface ()

  destructor

- Interface operator= (const Interface &interface)

  assignment operator

- virtual void map (const Variables &vars, const ActiveSet &set, Response &response, const bool asynch_-flag=false)

  variables to the responses.

- virtual const IntResponseMap & synch ()

  recovers data from a series of asynchronous evaluations (blocking)

- virtual const IntResponseMap & synch_nowait ()

  recovers data from a series of asynchronous evaluations (nonblocking)

- virtual void serve_evaluations ()

  evaluation server function for multiprocessor executions

- virtual void stop_evaluation_servers ()

  send messages from iterator rank 0 to terminate evaluation servers

- virtual void init_communicators (const IntArray &message_lengths, const int &max_iterator_concurrency)

  iterator and concurrent multiprocessor analyses within an evaluation.

- virtual void set_communicators (const IntArray &message_lengths)

  (the partitions are already allocated in ParallelLibrary).

- virtual void free_communicators ()

  iterator and concurrent multiprocessor analyses within an evaluation.

- virtual void init_serial ()

  reset certain defaults for serial interface objects.

- virtual int asynch_local_evaluation_concurrency () const

  return the user-specified concurrency for asynch local evaluations

- virtual String interface_synchronization () const

  return the user-specified interface synchronization

- virtual int minimum_points (bool constraint_flag) const

  ApproximationInterface (used by DataFitSurrModels).

- virtual int recommended_points (bool constraint_flag) const

  ApproximationInterface (used by DataFitSurrModels).

- virtual void approximation_function_indices (const IntSet &approx_fn_indices)

  set the (currently active) approximation function index set

- virtual void update_approximation (const Variables &vars, const Response &response)

  updates the anchor point for an approximation

- virtual void update_approximation (const RealMatrix &samples, const ResponseArray &resp_array)

  updates the current data points for an approximation

- virtual void update_approximation (const VariablesArray &vars_array, const ResponseArray &resp_array)

  updates the current data points for an approximation

- virtual void append_approximation (const Variables &vars, const Response &response)

  appends a single point to an existing approximation

- virtual void append_approximation (const RealMatrix &samples, const ResponseArray &resp_array)

  appends multiple points to an existing approximation

- virtual void append_approximation (const VariablesArray &vars_array, const ResponseArray &resp_array)

appends multiple points to an existing approximation

- virtual void build_approximation (const BoolDeque &rebuild_deque, const RealVector &lower_bnds, const RealVector &upper_bnds)

  builds the approximation

- virtual void rebuild_approximation (const BoolDeque &rebuild_deque)

  rebuilds the approximation after a data update

- virtual void pop_approximation (bool save_sdp_set)

  removes data from last append from the approximation

- virtual void restore_approximation ()

  restores the approximation to a selected previous state

- virtual bool restore_available ()

  queries the approximation for the ability to restore a previous increment

- virtual void finalize_approximation ()

  finalizes the approximation by applying all trial increments

- virtual void clear_current ()

  clears current data from an approximation interface

- virtual void clear_all ()

  clears all data from an approximation interface

- virtual bool anchor () const

  queries the presence of an anchorPoint within an approximation interface

- virtual const Pecos::SurrogateDataPoint & anchor_point () const

  returns the anchorPoint used within an approximation interface

- virtual std::vector< Approximation > & approximations ()

  retrieve the Approximations within an ApproximationInterface

- virtual const RealVectorArray & approximation_coefficients ()

  within an ApproximationInterface

- virtual void approximation_coefficients (const RealVectorArray &approx_coeffs)

  within an ApproximationInterface

- virtual const RealVector & approximation_variances (const RealVector &c_variables)

  within an ApproximationInterface

- virtual const SDPList & approximation_data (size_t index)

within an ApproximationInterface

- virtual const StringArray & analysis_drivers () const

  retrieve the analysis drivers specification for application interfaces

- virtual const AnalysisCode ∗ analysis_code () const

  return AnalysisCode::fileNameMap when defined for derived Interface class

- void assign_rep (Interface ∗interface_rep, bool ref_count_incr=true)

  replaces existing letter with a new one

- const String & interface_type () const

  returns the interface type

- const String & interface_id () const

  returns the interface identifier

- int evaluation_id () const

  returns the current function evaluation id for the interface

- void fine_grained_evaluation_counters (size_t num_fns)

  set fineGrainEvalCounters to true and initialize counters if needed

- void init_evaluation_counters (size_t num_fns)

  initialize fine grained evaluation counters

- void set_evaluation_reference ()

  set evaluation count reference points for the interface

- void print_evaluation_summary (std::ostream &s, bool minimal_header, bool relative_count) const

  print an evaluation summary for the interface

- bool multi_proc_eval_flag () const

  returns a flag signaling the use of multiprocessor evaluation partitions

- bool iterator_eval_dedicated_master_flag () const

  iterator-evaluation scheduling level

- bool is_null () const

  function to check interfaceRep (does this envelope contain a letter?)

Protected Member Functions

- Interface (BaseConstructor, const ProblemDescDB &problem_db)

  derived class constructors - Coplien, p. 139)

- Interface (NoDBBaseConstructor, size_t num_fns)

  (NoDBBaseConstructor used for on the fly instantiations without a DB)

- void init_algebraic_mappings (const Variables &vars, const Response &response)

  Define algebraicACVIndices, algebraicACVIds, and algebraicFnIndices.

- void asv_mapping (const ActiveSet &total_set, ActiveSet &algebraic_set, ActiveSet &core_set)

  from the total Interface evaluation requirements (total_set)

- void algebraic_mappings (const Variables &vars, const ActiveSet &algebraic_set, Response &algebraic_-response)

  and the data extracted from the algebraic_mappings file

- void response_mapping (const Response &algebraic_response, const Response &core_response, Response &total_response)

  from derived_map() to create the total response

Protected Attributes

- String interfaceType

  the interface type: system, fork, direct, grid, or approximation

- String idInterface

  the interface specification identifier string from the DAKOTA input file

- bool algebraicMappings

  Interface's parameter to response mapping that is explicit and algebraic.

- bool coreMappings

  ApplicationInterface or functionSurfaces for ApproximationInterface).

- bool fineGrainEvalCounters

  controls use of fn val/grad/hess counters

- int fnEvalId

  total interface evaluation counter

- int newFnEvalId

  new (non-duplicate) interface evaluation counter

- int fnEvalIdRefPt

  iteration reference point for fnEvalId

- int newFnEvalIdRefPt

  iteration reference point for newFnEvalId

- IntArray fnValCounter

  number of value evaluations by resp fn

- IntArray fnGradCounter

  number of gradient evaluations by resp fn

- IntArray fnHessCounter

  number of Hessian evaluations by resp fn

- IntArray newFnValCounter

  number of new value evaluations by resp fn

- IntArray newFnGradCounter

  number of new gradient evaluations by resp fn

- IntArray newFnHessCounter

  number of new Hessian evaluations by resp fn

- IntArray fnValRefPt

  iteration reference point for fnValCounter

- IntArray fnGradRefPt

  iteration reference point for fnGradCounter

- IntArray fnHessRefPt

  iteration reference point for fnHessCounter

- IntArray newFnValRefPt

  iteration reference point for newFnValCounter

- IntArray newFnGradRefPt

  iteration reference point for newFnGradCounter

- IntArray newFnHessRefPt

  iteration reference point for newFnHessCounter

- IntResponseMap rawResponseMap

  of asynchronous evaluations.

- StringArray fnLabels

print_evaluation_summary() and derived direct interface classes)

- bool multiProcEvalFlag

  flag for multiprocessor evaluation partitions (evalComm)

- bool ieDedMasterFlag

  flag for dedicated master partitioning at the iterator level

- short outputLevel

  output verbosity level: {SILENT,QUIET,NORMAL,VERBOSE,DEBUG}_OUTPUT

Private Member Functions

- Interface ∗ get_interface (ProblemDescDB &problem_db)

  Used by the envelope to instantiate the correct letter class.

- int algebraic_function_type (String)

  evaluation call to make

Private Attributes

- StringArray algebraicVarTags

  set of variable tags from AMPL stub.col

- SizetArray algebraicACVIndices

  continuous variables

- SizetArray algebraicACVIds

  continuous variables

- StringArray algebraicFnTags

  set of function tags from AMPL stub.row

- IntArray algebraicFnTypes

  AMPL objval (conival) calls.

- SizetArray algebraicFnIndices

  DAKOTA response functions.

- RealArray algebraicConstraintWeights

  set of weights for computing Hessian matrices for algebraic constraints;

- int numAlgebraicResponses

number of algebraic responses (objectives+constraints)

- Interface * interfaceRep

  pointer to the letter (initialized only for the envelope)

- int referenceCount

  number of objects sharing interfaceRep

- ASL * asl

  pointer to an AMPL solver library (ASL) object

8.48.1 Detailed Description

Base class for the interface class hierarchy.

The Interface class hierarchy provides the part of a Model that is responsible for mapping a set of Variables into a set of Responses. The mapping is performed using either a simulation-based application interface or a surrogate-based approximation interface. For memory efficiency and enhanced polymorphism, the interface hierarchy employs the "letter/envelope idiom" (see Coplien "Advanced C++", p. 133), for which the base class (Interface) serves as the envelope and one of the derived classes (selected in Interface::get_interface()) serves as the letter.

8.48.2 Constructor & Destructor Documentation

8.48.2.1 Interface ()

default constructor

used in Model envelope class instantiations

8.48.2.2 Interface (ProblemDescDB & *problem_db*)

standard constructor for envelope

Used in Model instantiation to build the envelope. This constructor only needs to extract enough data to properly execute get_interface, since Interface::Interface(BaseConstructor, problem_db) builds the actual base class data inherited by the derived interfaces.

8.48.2.3 Interface (const Interface & *interface*)

copy constructor

Copy constructor manages sharing of interfaceRep and incrementing of referenceCount.

8.48.2.4 ~Interface () [virtual]

destructor

Destructor decrements referenceCount and only deletes interfaceRep if referenceCount is zero.

8.48.2.5 Interface (BaseConstructor, const ProblemDescDB & *problem_db*) [protected]

derived class constructors - Coplien, p. 139)

This constructor is the one which must build the base class data for all inherited interfaces. get_interface() instantiates a derived class letter and the derived constructor selects this base class constructor in its initialization list (to avoid the recursion of the base class constructor calling get_interface() again). Since this is the letter and the letter IS the representation, interfaceRep is set to NULL (an uninitialized pointer causes problems in ~Interface).

8.48.3 Member Function Documentation

8.48.3.1 Interface operator= (const Interface & *interface*)

assignment operator

Assignment operator decrements referenceCount for old interfaceRep, assigns new interfaceRep, and increments referenceCount for new interfaceRep.

8.48.3.2 void assign_rep (Interface * *interface_rep*, bool *ref_count_incr* = true)

replaces existing letter with a new one

Similar to the assignment operator, the assign_rep() function decrements referenceCount for the old interfaceRep and assigns the new interfaceRep. It is different in that it is used for publishing derived class letters to existing envelopes, as opposed to sharing representations among multiple envelopes (in particular, assign_rep is passed a letter object and operator= is passed an envelope object). Letter assignment supports two models as governed by ref_count_incr:

- ref_count_incr = true (default): the incoming letter belongs to another envelope. In this case, increment the reference count in the normal manner so that deallocation of the letter is handled properly.
- ref_count_incr = false: the incoming letter is instantiated on the fly and has no envelope. This case is modeled after get_interface(): a letter is dynamically allocated using new and passed into assign_rep, the letter's reference count is not incremented, and the letter is not remotely deleted (its memory management is passed over to the envelope).

8.48.3.3 Interface * get_interface (ProblemDescDB & *problem_db*) [private]

Used by the envelope to instantiate the correct letter class.

used only by the envelope constructor to initialize interfaceRep to the appropriate derived type.

8.48.4 Member Data Documentation

8.48.4.1 IntResponseMap rawResponseMap [protected]

of asynchronous evaluations.

The map is a full/partial set of completions which are identified through their fnEvalId key. The raw set is postprocessed (i.e., finite difference gradients merged) in Model::synchronize() where it becomes responseMap.

The documentation for this class was generated from the following files:

- DakotaInterface.H
- DakotaInterface.C

8.49 Iterator Class Reference

Base class for the iterator class hierarchy.

Inheritance diagram for Iterator::

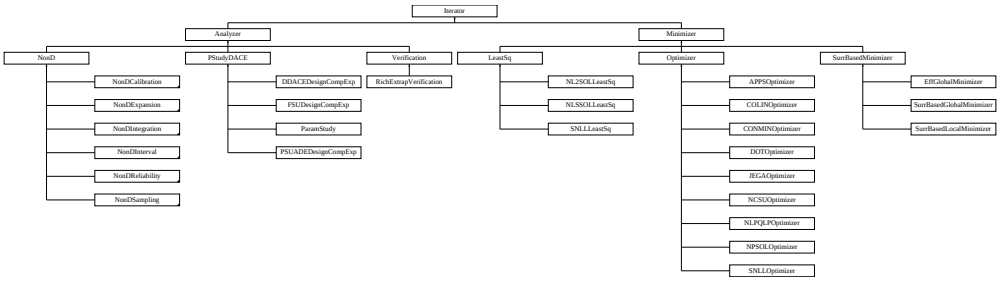

Public Member Functions

- Iterator ()

  default constructor

- Iterator (Model &model)

  standard envelope constructor

- Iterator (const String &method_name, Model &model)

  alternate envelope constructor for instantiations by name

- Iterator (const Iterator &iterator)

  copy constructor

- virtual ~Iterator ()

  destructor

- Iterator operator= (const Iterator &iterator)

  assignment operator

- virtual void initialize_run ()

  typically memory initialization; setting of instance pointers

- virtual void pre_run ()

  which can generate all Variables (parameter sets) a priori

- virtual void run ()

  and may include pre/post steps in lieu of separate pre/post

- virtual void post_run (std::ostream &s)

perform final analysis phase in a standalone way

- virtual void finalize_run ()

  deallocation and resetting of instance pointers

- virtual void reset ()

  restore initial state for repeated sub-iterator executions

- virtual const Variables & variables_results () const

  return a single final iterator solution (variables)

- virtual const Response & response_results () const

  return a single final iterator solution (response)

- virtual const VariablesArray & variables_array_results ()

  only be used if returns_multiple_points() returns true.

- virtual const ResponseArray & response_array_results ()

  only be used if returns_multiple_points() returns true.

- virtual bool accepts_multiple_points () const

  return is false. Override to return true if appropriate.

- virtual bool returns_multiple_points () const

  return is false. Override to return true if appropriate.

- virtual void initial_points (const VariablesArray &pts)

  only be used if accepts_multiple_points() returns true.

- virtual void response_results_active_set (const ActiveSet &set)

  set the requested data for the final iterator response results

- virtual void initialize_graphics (bool graph_2d, bool tabular_data, const String &tabular_file)

  initialize the 2D graphics window and the tabular graphics data

- virtual void print_results (std::ostream &s)

  print the final iterator results

- virtual int num_samples () const

  get the current number of samples

- virtual void sampling_reset (int min_samples, bool all_data_flag, bool stats_flag)

  reset sampling iterator to use at least min_samples

- virtual const String & sampling_scheme () const

  return sampling name

- virtual String uses_method () const

  return name of any enabling iterator used by this iterator

- virtual void method_recourse ()

  perform a method switch, if possible, due to a detected conflict

- virtual const VariablesArray & all_variables ()

  return the complete set of evaluated variables

- virtual const RealMatrix & all_samples ()

  return the complete set of evaluated samples

- virtual const ResponseArray & all_responses () const

  return the complete set of computed responses

- virtual bool compact_mode () const

  returns Analyzer::compactMode

- void run_iterator (std::ostream &s)

  orchestrate initialize/pre/run/post/finalize phases

- void assign_rep (Iterator *iterator_rep, bool ref_count_incr=true)

  replaces existing letter with a new one

- ProblemDescDB & problem_description_db () const

  return the problem description database (probDescDB)

- const String & method_name () const

  return the method name

- const String & method_id () const

  return the method identifier (idMethod)

- short output_level () const

  return the method output level (outputLevel)

- void summary_output (bool summary_output_flag)

  Set summary output control; true enables evaluation/results summary.

- int maximum_concurrency () const

  return the maximum concurrency supported by the iterator

- void maximum_concurrency (int max_conc)

  set the maximum concurrency supported by the iterator

- size_t num_final_solutions () const

  return the number of solutions to retain in best variables/response arrays

- void num_final_solutions (size_t num_final)

  set the number of solutions to retain in best variables/response arrays

- void active_set (const ActiveSet &set)

  employ evaluate_parameter_sets()

- const ActiveSet & active_set () const

  employ evaluate_parameter_sets()

- void sub_iterator_flag (bool si_flag)

  set subIteratorFlag (and update summaryOutputFlag if needed)

- void active_variable_mappings (const SizetArray &c_index1, const SizetArray &di_index1, const SizetArray &dr_index1, const ShortArray &c_target2, const ShortArray &di_target2, const ShortArray &dr_target2)

  set primaryA{CV,DIV,DRV}MapIndices, secondaryA{CV,DIV,DRV}MapTargets

- bool is_null () const

  function to check iteratorRep (does this envelope contain a letter?)

- Iterator * iterator_rep () const

  that are not mapped to the top Iterator level

Protected Member Functions

- Iterator (BaseConstructor, Model &model)

  derived class constructors - Coplien, p. 139)

- Iterator (NoDBBaseConstructor, Model &model)

  alternate constructor for base iterator classes constructed on the fly

- Iterator (NoDBBaseConstructor)

  alternate constructor for base iterator classes constructed on the fly

- virtual const VariablesArray & initial_points () const

  be meaningful after a call to initial_points mutator.

Protected Attributes

- Model iteratedModel

  or a thin RecastModel wrapped around it

- ProblemDescDB & probDescDB

  class member reference to the problem description database

- String methodName

  name of the iterator (the user's method spec)

- Real convergenceTol

  iteration convergence tolerance

- int maxIterations

  maximum number of iterations for the iterator

- int maxFunctionEvals

  maximum number of fn evaluations for the iterator

- int maxConcurrency

  maximum coarse-grained concurrency

- size_t numFunctions

  number of response functions

- size_t numContinuousVars

  number of active continuous vars

- size_t numDiscreteIntVars

  number of active discrete integer vars

- size_t numDiscreteRealVars

  number of active discrete real vars

- size_t numFinalSolutions

  number of solutions to retain in best variables/response arrays

- ActiveSet activeSet

  tracks the response data requirements on each function evaluation

- VariablesArray bestVariablesArray

  collection of N best solution variables found during the study

- ResponseArray bestResponseArray

  collection of N best solution responses found during the study

- bool subIteratorFlag

  (NestedModel::subIterator or DataFitSurrModel::daceIterator)

- SizetArray primaryACVarMapIndices

  from higher level iteration

- SizetArray primaryADIVarMapIndices

  higher level iteration

- SizetArray primaryADRVarMapIndices

  higher level iteration

- ShortArray secondaryACVarMapTargets

  from higher level iteration

- ShortArray secondaryADIVarMapTargets

  from higher level iteration

- ShortArray secondaryADRVarMapTargets

  from higher level iteration

- String gradientType

  type of gradient data: analytic, numerical, mixed, or none

- String methodSource

  source of numerical gradient routine: dakota or vendor

- String intervalType

  type of numerical gradient interval: central or forward

- String hessianType

  type of Hessian data: analytic, numerical, quasi, mixed, or none

- Real fdGradStepSize

  relative finite difference step size for numerical gradients

- Real fdHessByGradStepSize

  using first-order differences of gradients

- Real fdHessByFnStepSize

  using second-order differences of function values

- short outputLevel

  output verbosity level: {SILENT,QUIET,NORMAL,VERBOSE,DEBUG}_OUTPUT

- bool summaryOutputFlag

  sub-iterator use cases

- bool asynchFlag

  copy of the model's asynchronous evaluation flag

- int writePrecision

  write precision as specified by the user

Private Member Functions

- Iterator * get_iterator (Model &model)

  Used by the envelope to instantiate the correct letter class.

- Iterator * get_iterator (const String &method_name, Model &model)

  Used by the envelope to instantiate the correct letter class.

- virtual void pre_output ()

  convenience function to write variables to file, following pre-run

- virtual void post_input ()

  read tabular data for post-run mode

Private Attributes

- String idMethod

  method identifier string from the input file

- Iterator * iteratorRep

  pointer to the letter (initialized only for the envelope)

- int referenceCount

  number of objects sharing iteratorRep

8.49.1 Detailed Description

Base class for the iterator class hierarchy.

The Iterator class is the base class for one of the primary class hierarchies in DAKOTA. The iterator hierarchy contains all of the iterative algorithms which use repeated execution of simulations as function evaluations. For memory efficiency and enhanced polymorphism, the iterator hierarchy employs the "letter/envelope idiom" (see Coplien "Advanced C++", p. 133), for which the base class (Iterator) serves as the envelope and one of the derived classes (selected in Iterator::get_iterator()) serves as the letter.

8.49.2 Constructor & Destructor Documentation

8.49.2.1 Iterator ()

default constructor

The default constructor is used in Vector<Iterator> instantiations and for initialization of Iterator objects contained in Strategy derived classes (see derived class header files). iteratorRep is NULL in this case (a populated problem_db is needed to build a meaningful Iterator object). This makes it necessary to check for NULL pointers in the copy constructor, assignment operator, and destructor.

8.49.2.2 Iterator (Model & *model*)

standard envelope constructor

Used in iterator instantiations within strategy constructors. Envelope constructor only needs to extract enough data to properly execute get_iterator(), since letter holds the actual base class data.

8.49.2.3 Iterator (const String & *method_name*, Model & *model*)

alternate envelope constructor for instantiations by name

Used in sub-iterator instantiations within iterator constructors. Envelope constructor only needs to extract enough data to properly execute get_iterator(), since letter holds the actual base class data.

8.49.2.4 Iterator (const Iterator & *iterator*)

copy constructor

Copy constructor manages sharing of iteratorRep and incrementing of referenceCount.

8.49.2.5 ~Iterator () [virtual]

destructor

Destructor decrements referenceCount and only deletes iteratorRep when referenceCount reaches zero.

8.49.2.6 Iterator (BaseConstructor, Model & *model*) [protected]

derived class constructors - Coplien, p. 139)

This constructor builds the base class data for all inherited iterators. get_iterator() instantiates a derived class and the derived class selects this base class constructor in its initialization list (to avoid the recursion of the base class constructor calling get_iterator() again). Since the letter IS the representation, its representation pointer is set to NULL (an uninitialized pointer causes problems in ~Iterator).

8.49.2.7 Iterator (NoDBBaseConstructor, Model & *model*) [protected]

alternate constructor for base iterator classes constructed on the fly

This alternate constructor builds base class data for inherited iterators. It is used for on-the-fly instantiations for which DB queries cannot be used. Therefore it only sets attributes taken from the incoming model. Since there are no iterator-specific redefinitions of maxIterations or numFinalSolutions in NoDBBaseConstructor mode, go ahead and assign default value for all iterators.

8.49.2.8 Iterator (NoDBBaseConstructor) [protected]

alternate constructor for base iterator classes constructed on the fly

This alternate constructor builds base class data for inherited iterators. It is used for on-the-fly instantiations for which DB queries cannot be used. It has no incoming model, so only sets up a minimal set of defaults. However, its use is preferable to the default constructor, which should remain as minimal as possible. Since there are no iterator-specific redefinitions of maxIterations or numFinalSolutions in NoDBBaseConstructor mode, go ahead and assign default value for all iterators.

8.49.3 Member Function Documentation

8.49.3.1 Iterator operator= (const Iterator & *iterator*)

assignment operator

Assignment operator decrements referenceCount for old iteratorRep, assigns new iteratorRep, and increments referenceCount for new iteratorRep.

8.49.3.2 void initialize_run () [virtual]

typically memory initialization; setting of instance pointers

Perform initialization phases of run sequence, like allocating memory and setting instance pointers. Commonly used in sub-iterator executions. This is a virtual function; when re-implementing, a derived class must call its nearest parent's initialize_run(), typically _before_ performing its own implementation steps.

Reimplemented in CONMINOptimizer, LeastSq, Minimizer, NonD, Optimizer, DOTOptimizer, NLPQLPOptimizer, SNLLLeastSq, and SNLLOptimizer.

8.49.3.3 void pre_run () [virtual]

which can generate all Variables (parameter sets) a priori

pre-run phase, which a derived iterator may optionally reimplement; when not present, pre-run is likely integrated into the derived run function. This is a virtual function; when re-implementing, a derived class must call its nearest parent's pre_run(), if implemented, typically _before_ performing its own implementation steps.

Reimplemented in DDACEDesignCompExp, FSUDesignCompExp, NonDLHSSampling, ParamStudy, and PSUADEDesignCompExp.

8.49.3.4 void run () [virtual]

and may include pre/post steps in lieu of separate pre/post

Virtual run function for the iterator class hierarchy. All derived classes need to redefine it.

Reimplemented in LeastSq, NonD, Optimizer, PStudyDACE, Verification, and SurrBasedMinimizer.

8.49.3.5 void post_run (std::ostream & *s*) [virtual]

perform final analysis phase in a standalone way

Post-run phase, which a derived iterator may optionally reimplement; when not present, post-run is likely integrated into run. This is a virtual function; when re-implementing, a derived class must call its nearest parent's post_run(), typically _after_ performing its own implementation steps.

Reimplemented in COLINOptimizer, LeastSq, Optimizer, DDACEDesignCompExp, FSUDesignCompExp, NonDLHSSampling, ParamStudy, PSUADEDesignCompExp, SNLLLeastSq, and SNLLOptimizer.

8.49.3.6 void finalize_run () [virtual]

deallocation and resetting of instance pointers

Optional: perform finalization phases of run sequence, like deallocating memory and resetting instance pointers. Commonly used in sub-iterator executions. This is a virtual function; when re-implementing, a derived class must call its nearest parent's finalize_run(), typically _after_ performing its own implementation steps.

Reimplemented in LeastSq, Minimizer, NonD, Optimizer, SNLLLeastSq, and SNLLOptimizer.

8.49.3.7 void initialize_graphics (bool *graph_2d*, bool *tabular_data*, const String & *tabular_file*) [virtual]

initialize the 2D graphics window and the tabular graphics data

This is a convenience function for encapsulating graphics initialization operations. It does not require a strategyRep forward since it is only used by letter objects.

Reimplemented in NonDReliability, and SurrBasedMinimizer.

8.49.3.8 void print_results (std::ostream & *s*) [virtual]

print the final iterator results

This virtual function provides additional iterator-specific final results outputs beyond the function evaluation summary printed in finalize_run().

Reimplemented in Analyzer, LeastSq, Optimizer, PStudyDACE, Verification, NonDExpansion, NonDGlobalReliability, NonDGPMSABayesCalibration, NonDIncremLHSSampling, NonDInterval, NonDLHSSampling, NonDLocalReliability, RichExtrapVerification, and SurrBasedMinimizer.

8.49.3.9 int num_samples () const [virtual]

get the current number of samples

Return current number of evaluation points. Since the calculation of samples, collocation points, etc. might be costly, provide a default implementation here that backs out from the maxConcurrency. May be (is) overridden by derived classes.

Reimplemented in DDACEDesignCompExp, FSUDesignCompExp, NonDSampling, and PSUADEDesignCompExp.

8.49.3.10 void run_iterator (std::ostream & *s*)

orchestrate initialize/pre/run/post/finalize phases

Iterator supports a construct/initialize-run/pre-run/run/post-run/finalize-run/destruct progression. This member (non-virtual) function sequences these run phases; it accepts an ostream, but controls verbosity with outputLevel

8.49.3.11 void assign_rep (Iterator * *iterator_rep*, bool *ref_count_incr* = `true`)

replaces existing letter with a new one

Similar to the assignment operator, the assign_rep() function decrements referenceCount for the old iteratorRep and assigns the new iteratorRep. It is different in that it is used for publishing derived class letters to existing envelopes, as opposed to sharing representations among multiple envelopes (in particular, assign_rep is passed a letter object and operator= is passed an envelope object). Letter assignment supports two models as governed by ref_count_incr:

- ref_count_incr = true (default): the incoming letter belongs to another envelope. In this case, increment the reference count in the normal manner so that deallocation of the letter is handled properly.
- ref_count_incr = false: the incoming letter is instantiated on the fly and has no envelope. This case is modeled after get_iterator(): a letter is dynamically allocated using new and passed into assign_rep, the letter's reference count is not incremented, and the letter is not remotely deleted (its memory management is passed over to the envelope).

8.49.3.12 Iterator * get_iterator (Model & *model*) `[private]`

Used by the envelope to instantiate the correct letter class.

Used only by the envelope constructor to initialize iteratorRep to the appropriate derived type, as given by the methodName attribute.

8.49.3.13 Iterator * get_iterator (const String & *method_name*, Model & *model*) `[private]`

Used by the envelope to instantiate the correct letter class.

Used only by the envelope constructor to initialize iteratorRep to the appropriate derived type, as given by the passed method_name.

8.49.4 Member Data Documentation

8.49.4.1 Real fdGradStepSize [protected]

relative finite difference step size for numerical gradients

A scalar value (instead of the vector fd_gradient_step_size spec) is used within the iterator hierarchy since this attribute is only used to publish a step size to vendor numerical gradient algorithms.

8.49.4.2 Real fdHessByGradStepSize [protected]

using first-order differences of gradients

A scalar value (instead of the vector fd_hessian_step_size spec) is used within the iterator hierarchy since this attribute is only used to publish a step size to vendor numerical Hessian algorithms.

8.49.4.3 Real fdHessByFnStepSize [protected]

using second-order differences of function values

A scalar value (instead of the vector fd_hessian_step_size spec) is used within the iterator hierarchy since this attribute is only used to publish a step size to vendor numerical Hessian algorithms.

The documentation for this class was generated from the following files:

- DakotaIterator.H
- DakotaIterator.C

8.50 JEGAOptimizer Class Reference

A version of Dakota::Optimizer for instantiation of John Eddy's Genetic Algorithms (JEGA).

Inheritance diagram for JEGAOptimizer::



Public Member Functions

- virtual void find_optimum ()

  Performs the iterations to determine the optimal set of solutions.

- virtual bool accepts_multiple_points () const

  Overridden to return true since JEGA algorithms can accept multiple initial points.

- virtual bool returns_multiple_points () const

  Overridden to return true since JEGA algorithms can return multiple final points.

- virtual void initial_points (const VariablesArray &pts)

  Overridden to assign the _initPts member variable to the passed in collection of Dakota::Variables.

- virtual const VariablesArray & initial_points () const

  Overridden to return the collection of initial points for the JEGA algorithm created and run by this JEGAOptimizer.

- JEGAOptimizer (Model &model)

  Constructs a JEGAOptimizer class object.

- ~JEGAOptimizer ()

  Destructs a JEGAOptimizer.

Protected Member Functions

- void LoadDakotaResponses (const JEGA::Utilities::Design &from, Variables &vars, Response &resp) const

  Loads the JEGA-style Design class into equivolent Dakota-style Variables and Response objects.

- void ReCreateTheParameterDatabase ()

  Destroys the current parameter database and creates a new empty one.

- void LoadTheParameterDatabase ()

  Reads information out of the known Dakota::ProblemDescDB and puts it into the current parameter database.

- void LoadAlgorithmConfig (JEGA::FrontEnd::AlgorithmConfig &aConfig)

  Completely initializes the supplied algorithm configuration.

- void LoadProblemConfig (JEGA::FrontEnd::ProblemConfig &pConfig)

  Completely initializes the supplied problem configuration.

- void LoadTheDesignVariables (JEGA::FrontEnd::ProblemConfig &pConfig)

  Adds DesignVariableInfo objects into the problem configuration object.

- void LoadTheObjectiveFunctions (JEGA::FrontEnd::ProblemConfig &pConfig)

  Adds ObjectiveFunctionInfo objects into the problem configuration object.

- void LoadTheConstraints (JEGA::FrontEnd::ProblemConfig &pConfig)

  Adds ConstraintInfo objects into the problem configuration object.

- void GetBestSolutions (const JEGA::Utilities::DesignOFSortSet &from, std::multimap< RealRealPair, JEGA::Utilities::Design * > &designSortMap)

  Returns up to _numBest designs sorted by DAKOTA's fitness (L2 constraint violation, then utopia or objective), taking into account the algorithm type. The front of the returned map can be viewed as a single "best".

- void GetBestMOSolutions (const JEGA::Utilities::DesignOFSortSet &from, std::multimap< RealRealPair, JEGA::Utilities::Design * > &designSortMap)

  Retreive the best Designs from a set of solutions assuming that they are generated by a multi objective algorithm.

- void GetBestSOSolutions (const JEGA::Utilities::DesignOFSortSet &from, std::multimap< RealRealPair, JEGA::Utilities::Design * > &designSortMap)

  Retreive the best Designs from a set of solutions assuming that they are generated by a single objective algorithm.

- JEGA::DoubleMatrix ToDoubleMatrix (const VariablesArray &variables) const

  Converts the items in a VariablesArray into a DoubleMatrix whereby the items in the matrix are the design variables.

- void resize_variables_results_array (std::size_t newsize)

  Safely resizes the best variables array taking into account the requirements put forth by the envelope-letter design pattern.

- void resize_response_results_array (std::size_t newsize)

  Safely resizes the best response array taking into account the requirements put forth by the envelope-letter design pattern.

Private Attributes

- EvaluatorCreator * _theEvalCreator

  A pointer to an EvaluatorCreator used to create the evaluator used by JEGA in Dakota (a JEGAEvaluator).

- JEGA::Utilities::ParameterDatabase * _theParamDB

  A pointer to the ParameterDatabase from which all parameters are retrieved by the created algorithms.

- VariablesArray _initPts

  An array of initial points to use as an initial population.

Static Private Attributes

- static const std::string SOGA_METHOD_TXT

  The text that indicates the SOGA method.

- static const std::string MOGA_METHOD_TXT

  The text that indicates the MOGA method.

Classes

- class Driver

  A subclass of the JEGA front end driver that exposes the individual protected methods to execute the algorithm.

- class Evaluator

  An evaluator specialization that knows how to interact with Dakota.

- class EvaluatorCreator

  A specialization of the JEGA::FrontEnd::EvaluatorCreator that creates a new instance of a Evaluator.

8.50.1 Detailed Description

A version of Dakota::Optimizer for instantiation of John Eddy's Genetic Algorithms (JEGA).

This class encapsulates the necessary functionality for creating and properly initializing the JEGA algorithms (MOGA and SOGA).

8.50.2 Constructor & Destructor Documentation

8.50.2.1 JEGAOptimizer (Model & *model*)

Constructs a JEGAOptimizer class object.

This method does some of the initialization work for the algorithm. In particular, it initialized the JEGA core.

Parameters:

model The Dakota::Model that will be used by this optimizer for problem information, etc.

8.50.3 Member Function Documentation

8.50.3.1 void LoadDakotaResponses (const JEGA::Utilities::Design & *from*, Variables & *vars*, Response & *resp*) const [protected]

Loads the JEGA-style Design class into equivolent Dakota-style Variables and Response objects.

This version is meant for the case where a Variables and a Response object exist and just need to be loaded.

Parameters:

from The JEGA Design class object from which to extract the variable and response information for Dakota.

vars The Dakota::Variables object into which to load the design variable values of *from*.

resp The Dakota::Response object into which to load the objective function and constraint values of *from*.

8.50.3.2 void LoadTheParameterDatabase () [protected]

Reads information out of the known Dakota::ProblemDescDB and puts it into the current parameter database.

This should be called from the JEGAOptimizer constructor since it is the only time when the problem description database is certain to be configured to supply data for this optimizer.

8.50.3.3 void LoadAlgorithmConfig (JEGA::FrontEnd::AlgorithmConfig & *aConfig*) [protected]

Completely initializes the supplied algorithm configuration.

This loads the supplied configuration object with appropriate data retrieved from the parameter database.

Parameters:

aConfig The algorithm configuration object to load.

8.50.3.4 void LoadProblemConfig (JEGA::FrontEnd::ProblemConfig & *pConfig*) [protected]

Completely initializes the supplied problem configuration.

This loads the fresh configuration object using the LoadTheDesignVariables, LoadTheObjectiveFunctions, and LoadTheConstraints methods.

Parameters:

pConfig The problem configuration object to load.

8.50.3.5 void LoadTheDesignVariables (JEGA::FrontEnd::ProblemConfig & *pConfig*) [protected]

Adds DesignVariableInfo objects into the problem configuration object.

This retrieves design variable information from the ParameterDatabase and creates DesignVariableInfo's from it.

Parameters:

pConfig The problem configuration object to load.

8.50.3.6 void LoadTheObjectiveFunctions (JEGA::FrontEnd::ProblemConfig & *pConfig*) [protected]

Adds ObjectiveFunctionInfo objects into the problem configuration object.

This retrieves objective function information from the ParameterDatabase and creates ObjectiveFunctionInfo's from it.

Parameters:

pConfig The problem configuration object to load.

8.50.3.7 void LoadTheConstraints (JEGA::FrontEnd::ProblemConfig & *pConfig*) [protected]

Adds ConstraintInfo objects into the problem configuration object.

This retrieves constraint function information from the ParameterDatabase and creates ConstraintInfo's from it.

Parameters:

pConfig The problem configuration object to load.

8.50.3.8 void GetBestSolutions (const JEGA::Utilities::DesignOFSortSet & *from*, std::multimap< RealRealPair, JEGA::Utilities::Design * > & *designSortMap*) [protected]

Returns up to _numBest designs sorted by DAKOTA's fitness (L2 constraint violation, then utopia or objective), taking into account the algorithm type. The front of the returned map can be viewed as a single "best".

Parameters:

from The full set of designs returned by the solver.

designSortMap Map of best solutions with key pair<constraintViolation, fitness>

eventually this functionality must be moved into a separate post-processing application for MO datasets.

8.50.3.9 void GetBestMOSolutions (const JEGA::Utilities::DesignOFSortSet & *from*, std::multimap< RealRealPair, JEGA::Utilities::Design * > & *designSortMap*) [protected]

Retreive the best Designs from a set of solutions assuming that they are generated by a multi objective algorithm.

eventually this functionality must be moved into a separate post-processing application for MO datasets.

8.50.3.10 void GetBestSOSolutions (const JEGA::Utilities::DesignOFSortSet & *from*, std::multimap< RealRealPair, JEGA::Utilities::Design * > & *designSortMap*) [protected]

Retreive the best Designs from a set of solutions assuming that they are generated by a single objective algorithm.

eventually this functionality must be moved into a separate post-processing application for MO datasets.

8.50.3.11 JEGA::DoubleMatrix ToDoubleMatrix (const VariablesArray & *variables*) const [protected]

Converts the items in a VariablesArray into a DoubleMatrix whereby the items in the matrix are the design variables.

The matrix will not contain responses but when being used by Dakota, this doesn't matter. JEGA will attempt to re-evaluate these points but Dakota will recognize that they do not require re-evaluation and thus it will be a cheap operation.

Parameters:

variables The array of DakotaVariables objects to use as the contents of the returned matrix.

Returns:

The matrix created using the supplied VariablesArray.

8.50.3.12 void resize_variables_results_array (std::size_t *newsize*) [protected]

Safely resizes the best variables array taking into account the requirements put forth by the envelope-letter design pattern.

Do not directly call resize on the bestVariablesArray object unless you intend to share the internal content (letter) with other objects after assignment.

Parameters:

newsize The new size for the variables array.

8.50.3.13 void resize_response_results_array (std::size_t *newsize*) [protected]

Safely resizes the best response array taking into account the requirements put forth by the envelope-letter design pattern.

Do not directly call resize on the bestResponseArray object unless you intend to share the internal content (letter) with other objects after assignment.

Parameters:

newsize The new size for the responses array.

8.50.3.14 void find_optimum () [virtual]

Performs the iterations to determine the optimal set of solutions.

Override of pure virtual method in Optimizer base class.

The extraction of parameter values actually occurs in this method when the JEGA::FrontEnd::Driver::ExecuteAlgorithm is called. Also the loading of the problem and algorithm configurations occurs in this method. That way, if it is called more than once and the algorithm or problem has changed, it will be accounted for.

Implements Optimizer.

8.50.3.15 bool accepts_multiple_points () const [virtual]

Overridden to return true since JEGA algorithms can accept multiple initial points.

Returns:

true, always.

Reimplemented from Iterator.

8.50.3.16 bool returns_multiple_points () const [virtual]

Overridden to return true since JEGA algorithms can return multiple final points.

Returns:

true, always.

Reimplemented from Iterator.

8.50.3.17 void initial_points (const VariablesArray & *pts*) [virtual]

Overridden to assign the _initPts member variable to the passed in collection of Dakota::Variables.

Parameters:

pts The array of initial points for the JEGA algorithm created and run by this JEGAOptimizer.

Reimplemented from Iterator.

8.50.3.18 const VariablesArray & initial_points () const [virtual]

Overridden to return the collection of initial points for the JEGA algorithm created and run by this JEGAOptimizer.

Returns:

The collection of initial points for the JEGA algorithm created and run by this JEGAOptimizer.

Reimplemented from Iterator.

8.50.4 Member Data Documentation

8.50.4.1 VariablesArray _initPts [private]

An array of initial points to use as an initial population.

This member is here to help support the use of JEGA algorithms in Dakota strategies. If this array is populated, then whatever initializer is specified will be ignored and the DoubleMatrix initializer will be used instead on a matrix created from the data in this array.

The documentation for this class was generated from the following files:

- JEGAOptimizer.H
- JEGAOptimizer.C

8.51 JEGAOptimizer::Driver Class Reference

A subclass of the JEGA front end driver that exposes the individual protected methods to execute the algorithm.

Public Member Functions

- GeneticAlgorithm * ExtractAllData (const AlgorithmConfig &algConfig)

  Reads all required data from the problem description database stored in the supplied algorithm config.

- DesignOFSortSet PerformIterations (GeneticAlgorithm *theGA)

  Performs the required iterations on the supplied GA.

- void DestroyAlgorithm (GeneticAlgorithm *theGA)

  Deletes the supplied GA.

- Driver (const ProblemConfig &probConfig)

  Default constructs a Driver.

8.51.1 Detailed Description

A subclass of the JEGA front end driver that exposes the individual protected methods to execute the algorithm.

This is necessary because DAKOTA requires that all problem information be extracted from the problem description DB at the time of Optimizer construction and the front end does it all in the execute algorithm method which must be called in find_optimum.

8.51.2 Constructor & Destructor Documentation

8.51.2.1 Driver (const ProblemConfig & *probConfig*) [inline]

Default constructs a Driver.

Parameters:

probConfig The definition of the problem to be solved by this Driver whenever ExecuteAlgorithm is called.

The problem can be solved in multiple ways by multiple algorithms even using multiple different evaluators by issuing multiple calls to ExecuteAlgorithm with different AlgorithmConfigs.

8.51.3 Member Function Documentation

8.51.3.1 GeneticAlgorithm* ExtractAllData (const AlgorithmConfig & *algConfig*) [inline]

Reads all required data from the problem description database stored in the supplied algorithm config.

The returned GA is fully configured and ready to be run. It must also be destroyed at some later time. You MUST call DestroyAlgorithm for this purpose. Failure to do so could result in a memory leak and an eventual segmentation fault! Be sure to call DestroyAlgorithm prior to destroying the algorithm config that was used to create it!

This is just here to expose the base class method to users.

Parameters:

algConfig The fully loaded configuration object containing the database of parameters for the algorithm to be run on the known problem.

Returns:

The fully configured and loaded GA ready to be run using the PerformIterations method.

8.51.3.2 DesignOFSortSet PerformIterations (GeneticAlgorithm * *theGA*) `[inline]`

Performs the required iterations on the supplied GA.

This includes the calls to AlgorithmInitialize and AlgorithmFinalize and logs some information if appropriate.

This is just here to expose the base class method to users.

Parameters:

theGA The GA on which to perform iterations. This parameter must be non-null.

Returns:

The final solutions reported by the supplied GA after all iterations and call to AlgorithmFinalize.

8.51.3.3 void DestroyAlgorithm (GeneticAlgorithm * *theGA*) `[inline]`

Deletes the supplied GA.

Use this method to destroy a GA after all iterations have been run. This method knows if the log associated with the GA was created here and needs to be destroyed as well or not.

This is just here to expose the base class method to users.

Be sure to use this prior to destoying the algorithm config object which contains the target. The GA destructor needs the target to be in tact.

Parameters:

theGA The algorithm that is no longer needed and thus must be destroyed.

The documentation for this class was generated from the following file:

- JEGAOptimizer.C

8.52 JEGAOptimizer::Evaluator Class Reference

An evaluator specialization that knows how to interact with Dakota.

Public Member Functions

- virtual bool Evaluate (DesignGroup &group)

  Does evaluation of each design in group.

- virtual bool Evaluate (Design &des)

  This method cannot be used!!

- virtual std::string GetName () const

  Returns the proper name of this operator.

- virtual std::string GetDescription () const

  Returns a full description of what this operator does and how.

- virtual GeneticAlgorithmOperator ∗ Clone (GeneticAlgorithm &algorithm) const

  Creates and returns a pointer to an exact duplicate of this operator.

- Evaluator (GeneticAlgorithm &algorithm, Model &model)

  Constructs a Evaluator for use by algorithm.

- Evaluator (const Evaluator &copy)

  Copy constructs a Evaluator.

- Evaluator (const Evaluator &copy, GeneticAlgorithm &algorithm, Model &model)

  Copy constructs a Evaluator for use by algorithm.

Static Public Member Functions

- static const std::string & Name ()

  Returns the proper name of this operator.

- static const std::string & Description ()

  Returns a full description of what this operator does and how.

Protected Member Functions

- void SeparateVariables (const Design &from, RealVector &intoCont, IntVector &intoDiscInt, RealVector &intoDiscReal) const

  This method fills intoCont, intoDiscInt *and* intoDiscReal *appropriately using the values of* from.

- void RecordResponses (const RealVector &from, Design &into) const

  Records the computed objective and constraint function values into into.

- std::size_t GetNumberNonLinearConstraints () const

  Returns the number of non-linear constraints for the problem.

- std::size_t GetNumberLinearConstraints () const

  Returns the number of linear constraints for the problem.

Private Member Functions

- Evaluator (GeneticAlgorithm &algorithm)

  This constructor has no implementation and cannot be used.

Private Attributes

- Model & _model

  The Model known by this evaluator.

8.52.1 Detailed Description

An evaluator specialization that knows how to interact with Dakota.

This evaluator knows how to use the model to do evaluations both in synchronous and asynchronous modes.

8.52.2 Constructor & Destructor Documentation

8.52.2.1 Evaluator (GeneticAlgorithm & *algorithm*, Model & *model*) `[inline]`

Constructs a Evaluator for use by *algorithm*.

The optimizer is needed for purposes of variable scaling.

Parameters:

algorithm The GA for which the new evaluator is to be used.

model The model through which evaluations will be done.

8.52.2.2 Evaluator (const Evaluator & *copy*) [inline]

Copy constructs a Evaluator.

Parameters:

copy The evaluator from which properties are to be duplicated into this.

8.52.2.3 Evaluator (const Evaluator & *copy*, GeneticAlgorithm & *algorithm*, Model & *model*) [inline]

Copy constructs a Evaluator for use by *algorithm*.

The optimizer is needed for purposes of variable scaling.

Parameters:

copy The existing Evaluator from which to retrieve properties.

algorithm The GA for which the new evaluator is to be used.

model The model through which evaluations will be done.

8.52.2.4 Evaluator (GeneticAlgorithm & *algorithm*) [private]

This constructor has no implementation and cannot be used.

This constructor can never be used. It is provided so that this operator can still be registered in an operator registry even though it can never be instantiated from there.

Parameters:

algorithm The GA for which the new evaluator is to be used.

8.52.3 Member Function Documentation

8.52.3.1 static const std::string& Name () [inline, static]

Returns the proper name of this operator.

Returns:

The string "DAKOTA JEGA Evaluator".

8.52.3.2 static const std::string& Description () [inline, static]

Returns a full description of what this operator does and how.

The returned text is:

```
This evaluator uses Sandia's DAKOTA optimization
software to evaluate the passed in Designs.  This
makes it possible to take advantage of the fact that
DAKOTA is designed to run on massively parallel machines.
```

.

Returns:

A description of the operation of this operator.

8.52.3.3 void SeparateVariables (const Design & *from*, RealVector & *intoCont*, IntVector & *intoDiscInt*, RealVector & *intoDiscReal*) const [protected]

This method fills *intoCont*, *intoDiscInt* and *intoDiscReal* appropriately using the values of *from*.

The discrete integer design variable values are placed in *intoDiscInt*, the discrete real design variable values are placed in *intoDiscReal*, and the continuum are placed into *intoCont*. The values are written into the vectors from the beginning so any previous contents of the vectors will be overwritten.

Parameters:

from The Design class object from which to extract the discrete design variable values.

intoDiscInt The vector into which to place the extracted discrete integer values.

intoDiscReal The vector into which to place the extracted discrete real values.

intoCont The vector into which to place the extracted continuous values.

8.52.3.4 void RecordResponses (const RealVector & *from*, Design & *into*) const [protected]

Records the computed objective and constraint function values into *into*.

This method takes the response values stored in *from* and properly transfers them into the *into* design.

The response vector *from* is expected to contain values for each objective function followed by values for each non-linear constraint in the order in which the info objects were loaded into the target by the optimizer class.

Parameters:

from The vector of responses to install into *into*.

into The Design to which the responses belong and into which they must be written.

8.52.3.5 std::size_t GetNumberNonLinearConstraints () const [inline, protected]

Returns the number of non-linear constraints for the problem.

This is computed by adding the number of non-linear equality constraints to the number of non-linear inequality constraints. These values are obtained from the model.

Returns:

The total number of non-linear constraints.

8.52.3.6 std::size_t GetNumberLinearConstraints () const [inline, protected]

Returns the number of linear constraints for the problem.

This is computed by adding the number of linear equality constraints to the number of linear inequality constraints. These values are obtained from the model.

Returns:

The total number of linear constraints.

8.52.3.7 bool Evaluate (DesignGroup & *group*) [virtual]

Does evaluation of each design in *group*.

This method uses the Model known by this class to get Designs evaluated. It properly formats the Design class information in a way that Dakota will understand and then interprets the Dakota results and puts them back into the Design class object. It respects the asynchronous flag in the Model so evaluations may occur synchronously or asynchronously.

Prior to evaluating a Design, this class checks to see if it is marked as already evaluated. If it is, then the evaluation of that Design is not carried out. This is not strictly necessary because Dakota keeps track of evaluated designs and does not re-evaluate. An exception is the case of a population read in from a file complete with responses where Dakota is unaware of the evaluations.

Parameters:

group The group of Design class objects to be evaluated.

Returns:

true if all evaluations completed and false otherwise.

8.52.3.8 virtual bool Evaluate (Design & *des*) [inline, virtual]

This method cannot be used!!

This method does nothing and cannot be called. This is because in the case of asynchronous evaluation, this method would be unable to conform. It would require that each evaluation be done in a synchronous fashion.

Parameters:

des A Design that would be evaluated if this method worked.

Returns:

Would return true if the Design were evaluated and false otherwise. Never actually returns here. Issues a fatal error. Otherwise, it would always return false.

8.52.3.9 virtual std::string GetName () const [inline, virtual]

Returns the proper name of this operator.

Returns:

See Name().

8.52.3.10 virtual std::string GetDescription () const [inline, virtual]

Returns a full description of what this operator does and how.

Returns:

See Description().

8.52.3.11 virtual GeneticAlgorithmOperator* Clone (GeneticAlgorithm & *algorithm*) const [inline, virtual]

Creates and returns a pointer to an exact duplicate of this operator.

Parameters:

algorithm The GA for which the clone is being created.

Returns:

A clone of this operator.

8.52.4 Member Data Documentation

8.52.4.1 Model& _model [private]

The Model known by this evaluator.

It is through this model that evaluations will take place.

The documentation for this class was generated from the following file:

- JEGAOptimizer.C

8.53 JEGAOptimizer::EvaluatorCreator Class Reference

A specialization of the JEGA::FrontEnd::EvaluatorCreator that creates a new instance of a Evaluator.

Public Member Functions

- virtual GeneticAlgorithmEvaluator * CreateEvaluator (GeneticAlgorithm &alg)

  Overriden to return a newly created Evaluator.

- EvaluatorCreator (Model &theModel)

  Constructs an EvaluatorCreator using the supplied model.

Private Attributes

- Model & _theModel

  The user defined model to be passed to the constructor of the Evaluator.

8.53.1 Detailed Description

A specialization of the JEGA::FrontEnd::EvaluatorCreator that creates a new instance of a Evaluator.

8.53.2 Constructor & Destructor Documentation

8.53.2.1 EvaluatorCreator (Model & *theModel*) `[inline]`

Constructs an EvaluatorCreator using the supplied model.

Parameters:

theModel The Dakota::Model this creator will pass to the created evaluator.

8.53.3 Member Function Documentation

8.53.3.1 virtual GeneticAlgorithmEvaluator* CreateEvaluator (GeneticAlgorithm & *alg*) `[inline, virtual]`

Overriden to return a newly created Evaluator.

The GA will assume ownership of the evaluator so we needn't worry about keeping track of it for destruction. The additional parameters needed by the Evaluator are stored as members of this class at construction time.

Parameters:

alg The GA for which the evaluator is to be created.

Returns:

A pointer to a newly created Evaluator.

The documentation for this class was generated from the following file:

- JEGAOptimizer.C

8.54 LeastSq Class Reference

Base class for the nonlinear least squares branch of the iterator hierarchy.

Inheritance diagram for LeastSq::

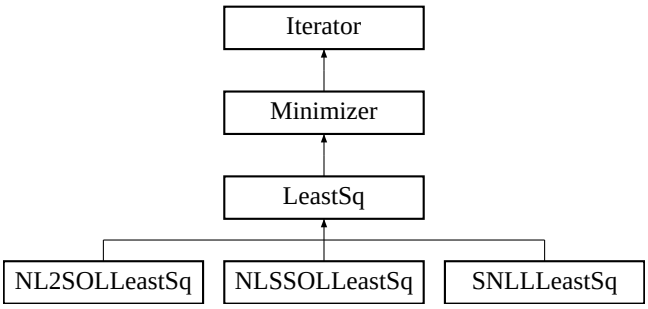

Protected Member Functions

- LeastSq ()

  default constructor

- LeastSq (Model &model)

  standard constructor

- LeastSq (NoDBBaseConstructor, Model &model)

  alternate constructor

- ~LeastSq ()

  destructor

- void initialize_run ()
- void run ()

  and may include pre/post steps in lieu of separate pre/post

- void post_run (std::ostream &s)
- void finalize_run ()

  deallocation and resetting of instance pointers

- void print_results (std::ostream &s)
- virtual void minimize_residuals ()=0

  for the least squares branch.

- void read_observed_data ()

  read user data file to load observed data points

- void get_confidence_intervals ()

  Calculate confidence intervals on estimated parameters.

Static Protected Member Functions

- static void primary_resp_recast (const Variables &native_vars, const Variables &scaled_vars, const Response &native_response, Response &scaled_response)

  (user) to iterator space

Protected Attributes

- int numLeastSqTerms

  number of least squares terms

- LeastSq * prevLSqInstance

  pointer containing previous value of leastSqInstance

- bool weightFlag

  flag indicating whether weighted least squares is active

- String obsDataFilename

  filename from which to read observed data

- bool obsDataFlag

  flag indicating whether user-supplied data is active

- RealArray obsData

  storage for user-supplied data for computing residuals

- RealVector confBoundsLower

  lower bounds for confidence intervals on calibration parameters

- RealVector confBoundsUpper

  upper bounds for confidence intervals on calibration parameters

Static Protected Attributes

- static LeastSq * leastSqInstance

  pointer to LeastSq instance used in static member functions

8.54.1 Detailed Description

Base class for the nonlinear least squares branch of the iterator hierarchy.

The LeastSq class provides common data and functionality for least squares solvers (including NL2OL, NLSSOLLeastSq, and SNLLLeastSq.

8.54.2 Constructor & Destructor Documentation

8.54.2.1 LeastSq (Model & *model*) [protected]

standard constructor

This constructor extracts the inherited data for the least squares branch and performs sanity checking on gradient and constraint settings.

8.54.3 Member Function Documentation

8.54.3.1 void initialize_run () [protected, virtual]

This function should be invoked (or reimplemented) by any derived implementations of initialize_run() (which would otherwise hide it).

Reimplemented from Minimizer.

Reimplemented in SNLLLeastSq.

8.54.3.2 void run () [inline, protected, virtual]

and may include pre/post steps in lieu of separate pre/post

Virtual run function for the iterator class hierarchy. All derived classes need to redefine it.

Reimplemented from Iterator.

8.54.3.3 void post_run (std::ostream & *s*) [protected, virtual]

Implements portions of post_run specific to LeastSq for scaling back to native variables and functions. This function should be invoked (or reimplemented) by any derived implementations of post_run() (which would otherwise hide it).

Reimplemented from Iterator.

Reimplemented in SNLLLeastSq.

8.54.3.4 void finalize_run () [inline, protected, virtual]

deallocation and resetting of instance pointers

Optional: perform finalization phases of run sequence, like deallocating memory and resetting instance pointers. Commonly used in sub-iterator executions. This is a virtual function; when re-implementing, a derived class must call its nearest parent's finalize_run(), typically _after_ performing its own implementation steps.

Reimplemented from Minimizer.

Reimplemented in SNLLLeastSq.

8.54.3.5 void print_results (std::ostream & *s*) [protected, virtual]

Redefines default iterator results printing to include nonlinear least squares results (residual terms and constraints).

Reimplemented from Iterator.

8.54.3.6 void primary_resp_recast (const Variables & *native_vars*, const Variables & *scaled_vars*, const Response & *native_response*, Response & *iterator_response*) [static, protected]

(user) to iterator space

Least squares function map from user/native space to iterator/scaled space using a RecastModel. If no scaling also copies constraints.

8.54.3.7 void read_observed_data () [protected]

read user data file to load observed data points

read user's observation data for computation of least squares residuals (currently reading on all processors – need to read once and broadcast)

8.54.3.8 void get_confidence_intervals () [protected]

Calculate confidence intervals on estimated parameters.

Calculate individual confidence intervals for each parameter. These bounds are based on a linear approximation of the nonlinear model.

The documentation for this class was generated from the following files:

- DakotaLeastSq.H
- DakotaLeastSq.C

8.55 MergedConstraints Class Reference

the merged data view.

Inheritance diagram for MergedConstraints::



Public Member Functions

- MergedConstraints (const SharedVariablesData &svd)

  lightweight constructor

- MergedConstraints (const ProblemDescDB &problem_db, const SharedVariablesData &svd)

  standard constructor

- ~MergedConstraints ()

  destructor

- void write (std::ostream &s) const

  write a variable constraints object to an std::ostream

- void read (std::istream &s)

  read a variable constraints object from an std::istream

Protected Member Functions

- void reshape (const SizetArray &vc_totals)

  reshape the lower/upper bound arrays within the Constraints hierarchy

- void build_active_views ()

  construct active views of all variables bounds arrays

- void build_inactive_views ()

  construct inactive views of all variables bounds arrays

8.55.1 Detailed Description

the merged data view.

Derived variable constraints classes take different views of the design, uncertain, and state variable types and the continuous and discrete domain types. The MergedConstraints derived class combines continuous and discrete domain types but separates design, uncertain, and state variable types. The result is merged design bounds arrays (mergedDesignLowerBnds, mergedDesignUpperBnds), uncertain distribution bounds arrays (uncertainLowerBnds, uncertainUpperBnds), and merged state bounds arrays (mergedStateLowerBnds, mergedStateUpperBnds). The branch and bound strategy uses this approach (see Variables::get_variables(problem_db) for variables type selection; variables type is passed to the Constraints constructor in Model).

8.55.2 Constructor & Destructor Documentation

8.55.2.1 MergedConstraints (const ProblemDescDB & *problem_db*, const SharedVariablesData & *svd*)

standard constructor

In this class, a merged data approach is used in which continuous and discrete arrays are combined into a single continuous array (integrality is relaxed; the converse of truncating reals is not currently supported but could be in the future if needed). Iterators/strategies which use this class include: BranchBndOptimizer. Extract fundamental lower and upper bounds and merge continuous and discrete domains to create mergedDesignLowerBnds, mergedDesignUpperBnds, mergedStateLowerBnds, and mergedStateUpperBnds.

8.55.3 Member Function Documentation

8.55.3.1 void reshape (const SizetArray & *vc_totals*) `[protected, virtual]`

reshape the lower/upper bound arrays within the Constraints hierarchy

Resizes the derived bounds arrays.

Reimplemented from Constraints.

The documentation for this class was generated from the following files:

- MergedConstraints.H
- MergedConstraints.C

8.56 MergedVariables Class Reference

merged data view.

Inheritance diagram for MergedVariables::



Public Member Functions

- MergedVariables (const ProblemDescDB &problem_db, const std::pair< short, short > &view)

  standard constructor

- MergedVariables (const SharedVariablesData &svd)

  lightweight constructor

- ~MergedVariables ()

  destructor

Protected Member Functions

- void read (std::istream &s)

  read a variables object from an std::istream

- void write (std::ostream &s) const

  write a variables object to an std::ostream

- void write_aprepro (std::ostream &s) const

  write a variables object to an std::ostream in aprepro format

- void read_tabular (std::istream &s)
- void write_tabular (std::ostream &s) const

  write a variables object in tabular format to an std::ostream

- void reshape (const SizetArray &vc_totals)

  variablesComponents

- void build_active_views ()

  construct active views of all variables arrays

- void build_inactive_views ()

  construct inactive views of all variables arrays

8.56.1 Detailed Description

merged data view.

Derived variables classes take different views of the design, uncertain, and state variable types and the continuous and discrete domain types. The MergedVariables derived class combines continuous and discrete domain types but separates design, uncertain, and state variable types. The result is a single continuous array of design variables (mergedDesignVars), a single continuous array of uncertain variables (uncertainVars), and a single continuous array of state variables (mergedStateVars). The branch and bound strategy uses this approach (see Variables::get_-variables(problem_db)).

8.56.2 Constructor & Destructor Documentation

8.56.2.1 MergedVariables (const ProblemDescDB & *problem_db*, const std::pair< short, short > & *view*)

standard constructor

In this class, a merged data approach is used in which continuous and discrete arrays are combined into a single continuous array (integrality is relaxed; the converse of truncating reals is not currently supported but could be in the future if needed). Iterators/strategies which use this class include: BranchBndOptimizer. Extract fundamental variable types and labels and merge continuous and discrete domains to create aggregate arrays and views.

8.56.3 Member Function Documentation

8.56.3.1 void read_tabular (std::istream & *s*) `[protected, virtual]`

Presumes variables object is appropriately sized to receive data

Reimplemented from Variables.

The documentation for this class was generated from the following files:

- MergedVariables.H
- MergedVariables.C

8.57 Minimizer Class Reference

iterator hierarchy.

Inheritance diagram for Minimizer::

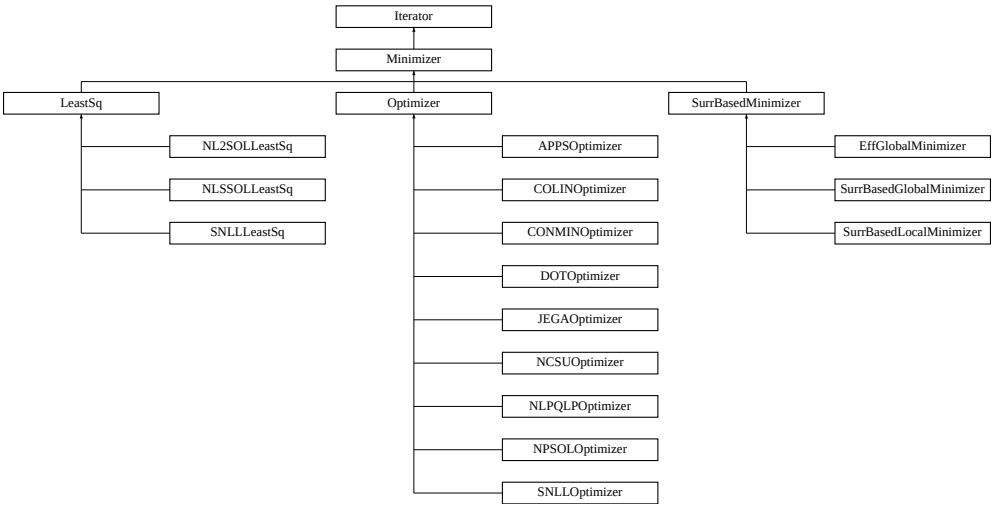

Protected Member Functions

- Minimizer ()

  default constructor

- Minimizer (Model &model)

  standard constructor

- Minimizer (NoDBBaseConstructor, Model &model)

  alternate constructor for "on the fly" instantiations

- Minimizer (NoDBBaseConstructor, size_t num_lin_ineq, size_t num_lin_eq, size_t num_nln_ineq, size_t num_nln_eq)

  alternate constructor for "on the fly" instantiations

- ~Minimizer ()

  destructor

- void initialize_run ()

  typically memory initialization; setting of instance pointers

- void finalize_run ()

  deallocation and resetting of instance pointers

- void initialize_scaling ()

  checking

- void compute_scaling (int object_type, int auto_type, int num_vars, RealVector &lbs, RealVector &ubs, RealVector &targets, const StringArray &scale_strings, const RealVector &scales, IntArray &scale_types, RealVector &scale_mults, RealVector &scale_offsets)

  vector of variables, functions, constraints, etc.

- bool compute_scale_factor (const Real lower_bound, const Real upper_bound, Real ∗multiplier, Real ∗offset)

  automatically compute a single scaling factor – bounds case

- bool compute_scale_factor (const Real target, Real ∗multiplier)

  automatically compute a single scaling factor – target case

- bool need_resp_trans_byvars (const ShortArray &asv, int start_index, int num_resp)

  transformations

- RealVector modify_n2s (const RealVector &native_vars, const IntArray &scale_types, const RealVector &multipliers, const RealVector &offsets) const

  general RealVector mapping from native to scaled variables vectors:

- RealVector modify_s2n (const RealVector &scaled_vars, const IntArray &scale_types, const RealVector &multipliers, const RealVector &offsets) const

  general RealVector mapping from scaled to native variables (and values)

- void response_modify_n2s (const Variables &scaled_vars, const Response &native_response, Response &scaled_response, int native_offset, int recast_offset, int num_responses) const

  map reponses from native to scaled variable space

- void response_modify_s2n (const Variables &native_vars, const Response &scaled_response, Response &native_response, int scaled_offset, int native_offset, int num_responses) const

  map responses from scaled to native variable space

- RealMatrix lin_coeffs_modify_n2s (const RealMatrix &native_coeffs, const RealVector &cv_multipliers, const RealVector &lin_multipliers) const

  general linear coefficients mapping from native to scaled space

- void print_scaling (const String &info, const IntArray &scale_types, const RealVector &scale_mults, const RealVector &scale_offsets, const StringArray &labels)

  print scaling information for a particular response type in tabular form

Static Protected Member Functions

- static void variables_recast (const Variables &scaled_vars, Variables &native_vars)

variables from scaled to native (user) space

- static void secondary_resp_recast (const Variables &native_vars, const Variables &scaled_vars, const Response &native_response, Response &scaled_response)

  transform constraints (fns, grads, Hessians) from native (user) to

Protected Attributes

- Real constraintTol

  optimizer/least squares constraint tolerance

- Real bigRealBoundSize

  cutoff value for inequality constraint and continuous variable bounds

- int bigIntBoundSize

  cutoff value for discrete variable bounds

- size_t numNonlinearIneqConstraints

  number of nonlinear inequality constraints

- size_t numNonlinearEqConstraints

  number of nonlinear equality constraints

- size_t numLinearIneqConstraints

  number of linear inequality constraints

- size_t numLinearEqConstraints

  number of linear equality constraints

- int numNonlinearConstraints

  total number of nonlinear constraints

- int numLinearConstraints

  total number of linear constraints

- int numConstraints

  total number of linear and nonlinear constraints

- bool boundConstraintFlag

  constraints. Used for method selection and error checking.

- bool speculativeFlag

  flag for speculative gradient evaluations

- size_t numUserPrimaryFns

number of objective functions or least squares terms in the user's model

- size_t numIterPrimaryFns

  number of objective functions or least squares terms in iterator's view

- bool scaleFlag

  flag for overall scaling status

- bool varsScaleFlag

  flag for variables scaling

- bool primaryRespScaleFlag

  flag for primary response scaling

- bool secondaryRespScaleFlag

  flag for secondary response scaling

- IntArray cvScaleTypes

  scale flags for continuous vars.

- RealVector cvScaleMultipliers

  scales for continuous variables

- RealVector cvScaleOffsets

  offsets for continuous variables

- IntArray responseScaleTypes

  scale flags for all responses

- RealVector responseScaleMultipliers

  scales for all responses

- RealVector responseScaleOffsets

  offsets for all responses (zero for functions, not for nonlin con)

- IntArray linearIneqScaleTypes

  scale flags for linear ineq

- RealVector linearIneqScaleMultipliers

  scales for linear ineq constrs.

- RealVector linearIneqScaleOffsets

  offsets for linear ineq constrs.

- IntArray linearEqScaleTypes

  scale flags for linear eq.

- RealVector linearEqScaleMultipliers

  scales for linear constraints

- RealVector linearEqScaleOffsets

  offsets for linear constraints

- Minimizer * prevMinInstance

  pointer containing previous value of minimizerInstance

- bool vendorNumericalGradFlag

  convenience flag for gradType == numerical && methodSource == vendor

Static Protected Attributes

- static Minimizer * minimizerInstance

  pointer to Minimizer used in static member functions

Friends

- class SOLBase

  access to iterator hierarchy data (to avoid attribute replication)

- class SNLLBase

  access to iterator hierarchy data (to avoid attribute replication)

8.57.1 Detailed Description

iterator hierarchy.

The Minimizer class provides common data and functionality for Optimizer and LeastSq.

8.57.2 Constructor & Destructor Documentation

8.57.2.1 Minimizer (Model & *model*) [protected]

standard constructor

This constructor extracts inherited data for the optimizer and least squares branches and performs sanity checking on constraint settings.

8.57.3 Member Function Documentation

8.57.3.1 void initialize_run () [protected, virtual]

typically memory initialization; setting of instance pointers

Perform initialization phases of run sequence, like allocating memory and setting instance pointers. Commonly used in sub-iterator executions. This is a virtual function; when re-implementing, a derived class must call its nearest parent's initialize_run(), typically _before_ performing its own implementation steps.

Reimplemented from Iterator.

Reimplemented in CONMINOptimizer, LeastSq, Optimizer, DOTOptimizer, NLPQLPOptimizer, SNLLLeastSq, and SNLLOptimizer.

8.57.3.2 void finalize_run () [inline, protected, virtual]

deallocation and resetting of instance pointers

Optional: perform finalization phases of run sequence, like deallocating memory and resetting instance pointers. Commonly used in sub-iterator executions. This is a virtual function; when re-implementing, a derived class must call its nearest parent's finalize_run(), typically _after_ performing its own implementation steps.

Reimplemented from Iterator.

Reimplemented in LeastSq, Optimizer, SNLLLeastSq, and SNLLOptimizer.

8.57.3.3 void initialize_scaling () [protected]

checking

helper function used in constructors of derived classes to set up scaling types, multipliers and offsets when input scaling flag is enabled

8.57.3.4 void variables_recast (const Variables & *scaled_vars*, Variables & *native_vars*) [static, protected]

variables from scaled to native (user) space

Variables map from iterator/scaled space to user/native space using a RecastModel.

8.57.3.5 void secondary_resp_recast (const Variables & *native_vars*, const Variables & *scaled_vars*, const Response & *native_response*, Response & *iterator_response*) [static, protected]

transform constraints (fns, grads, Hessians) from native (user) to

Constraint function map from user/native space to iterator/scaled/combined space using a RecastModel.

8.57.3.6 bool need_resp_trans_byvars (const ShortArray & *asv*, int *start_index*, int *num_resp*) [protected]

transformations

Determine if variable transformations present and derivatives requested, which implies a response transformation is necessay

8.57.3.7 RealVector modify_n2s (const RealVector & *native_vars*, const IntArray & *scale_types*, const RealVector & *multipliers*, const RealVector & *offsets*) const [protected]

general RealVector mapping from native to scaled variables vectors:

general RealVector mapping from native to scaled variables; loosely, in greatest generality: scaled_var = log((native_var - offset) / multiplier)

8.57.3.8 RealVector modify_s2n (const RealVector & *scaled_vars*, const IntArray & *scale_types*, const RealVector & *multipliers*, const RealVector & *offsets*) const [protected]

general RealVector mapping from scaled to native variables (and values)

general RealVector mapping from scaled to native variables and/or vals; loosely, in greatest generality: scaled_var = (LOG_BASE^scaled_var) $*$ multiplier + offset

8.57.3.9 void response_modify_n2s (const Variables & *native_vars*, const Response & *native_response*, Response & *recast_response*, int *native_offset*, int *recast_offset*, int *num_responses*) const [protected]

map reponses from native to scaled variable space

scaling response mapping: modifies response from a model (user/native) for use in iterators (scaled) – not including multi_objective_modify

8.57.3.10 void response_modify_s2n (const Variables & *native_vars*, const Response & *scaled_response*, Response & *native_response*, int *scaled_offset*, int *native_offset*, int *num_responses*) const [protected]

map responses from scaled to native variable space

scaling response mapping: modifies response from scaled (iterator) to native (user) space – not including multi_-objective_retrieve

8.57.3.11 RealMatrix lin_coeffs_modify_n2s (const RealMatrix & *src_coeffs*, const RealVector & *cv_multipliers*, const RealVector & *lin_multipliers*) const [protected]

general linear coefficients mapping from native to scaled space

compute scaled linear constraint matrix given design variable multipliers and linear scaling multipliers. Only scales components corresponding to continuous variables so for src_coeffs of size MxN, lin_multipliers.size() <=

M, cv_multipliers.size() <= N

The documentation for this class was generated from the following files:

- DakotaMinimizer.H
- DakotaMinimizer.C

8.58 MixedConstraints Class Reference

the default data view (no variable or domain type array merging).

Inheritance diagram for MixedConstraints::



Public Member Functions

- MixedConstraints (const SharedVariablesData &svd)

  lightweight constructor

- MixedConstraints (const ProblemDescDB &problem_db, const SharedVariablesData &svd)

  standard constructor

- ~MixedConstraints ()

  destructor

- void write (std::ostream &s) const

  write a variable constraints object to an std::ostream

- void read (std::istream &s)

  read a variable constraints object from an std::istream

Protected Member Functions

- void reshape (const SizetArray &vc_totals)

  reshape the lower/upper bound arrays within the Constraints hierarchy

- void build_active_views ()

  construct active views of all variables bounds arrays

- void build_inactive_views ()

  construct inactive views of all variables bounds arrays

8.58.1 Detailed Description

the default data view (no variable or domain type array merging).

Derived variable constraints classes take different views of the design, uncertain, and state variable types and the continuous and discrete domain types. The MixedConstraints derived class separates the design, uncertain, and state variable types as well as the continuous and discrete domain types. The result is separate lower and upper bounds arrays for continuous design, discrete design, uncertain, continuous state, and discrete state variables. This is the default approach, so all iterators and strategies not specifically utilizing the All or Merged views use this approach (see Variables::get_variables(problem_db) for variables type selection; variables type is passed to the Constraints constructor in Model).

8.58.2 Constructor & Destructor Documentation

8.58.2.1 MixedConstraints (const ProblemDescDB & *problem_db*, const SharedVariablesData & *svd*)

standard constructor

In this class, mixed continuous/discrete variables are used. Most iterators/strategies use this approach, which is the default in Constraints::get_constraints().

8.58.3 Member Function Documentation

8.58.3.1 void reshape (const SizetArray & *vc_totals*) `[protected, virtual]`

reshape the lower/upper bound arrays within the Constraints hierarchy

Resizes the derived bounds arrays.

Reimplemented from Constraints.

The documentation for this class was generated from the following files:

- MixedConstraints.H
- MixedConstraints.C

8.59 MixedVariables Class Reference

the default data view (no variable or domain type array merging).

Inheritance diagram for MixedVariables::



Public Member Functions

- MixedVariables (const ProblemDescDB &problem_db, const std::pair< short, short > &view)

  standard constructor

- MixedVariables (const SharedVariablesData &svd)

  lightweight constructor

- ~MixedVariables ()

  destructor

Protected Member Functions

- void read (std::istream &s)

  read a variables object from an std::istream

- void write (std::ostream &s) const

  write a variables object to an std::ostream

- void write_aprepro (std::ostream &s) const

  write a variables object to an std::ostream in aprepro format

- void read_tabular (std::istream &s)
- void write_tabular (std::ostream &s) const

  write a variables object in tabular format to an std::ostream

- void reshape (const SizetArray &vc_totals)

  variablesComponents

- void build_active_views ()

  construct active views of all variables arrays

- void build_inactive_views ()

  construct inactive views of all variables arrays

8.59.1 Detailed Description

the default data view (no variable or domain type array merging).

Derived variables classes take different views of the design, uncertain, and state variable types and the continuous and discrete domain types. The MixedVariables derived class separates the design, uncertain, and state variable types as well as the continuous and discrete domain types. The result is separate arrays for continuous design, discrete design, uncertain, continuous state, and discrete state variables. This is the default approach, so all iterators and strategies not specifically utilizing the All or Merged views use this approach (see Variables::get_-variables(problem_db)).

8.59.2 Constructor & Destructor Documentation

8.59.2.1 MixedVariables (const ProblemDescDB & *problem_db*, const std::pair< short, short > & *view*)

standard constructor

In this class, the distinct approach is used (design, uncertain, and state variable types and continuous and discrete domain types are distinct). Most iterators/strategies use this approach.

8.59.3 Member Function Documentation

8.59.3.1 void read_tabular (std::istream & *s*) `[protected, virtual]`

Presumes variables object is already appropriately sized to receive!

Reimplemented from Variables.

The documentation for this class was generated from the following files:

- MixedVariables.H
- MixedVariables.C

8.60 Model Class Reference

Base class for the model class hierarchy.

Inheritance diagram for Model::

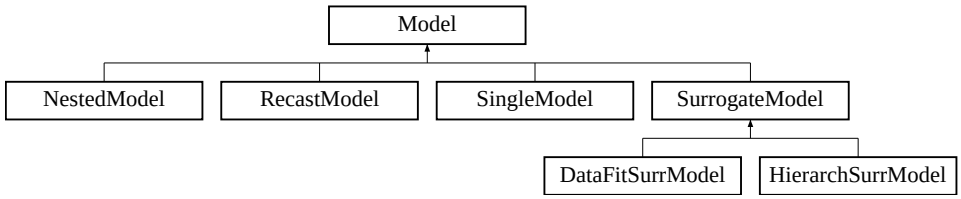

Public Member Functions

- Model ()

  default constructor

- Model (ProblemDescDB &problem_db)

  standard constructor for envelope

- Model (const Model &model)

  copy constructor

- virtual ~Model ()

  destructor

- Model operator= (const Model &model)

  assignment operator

- virtual Iterator & subordinate_iterator ()

  return the sub-iterator in nested and surrogate models

- virtual Model & subordinate_model ()

  dive through model recursions that may bypass some components.

- virtual Model & surrogate_model ()

  return the approximation sub-model in surrogate models

- virtual Model & truth_model ()

  return the truth sub-model in surrogate models

- virtual void derived_subordinate_models (ModelList &ml, bool recurse_flag)

  portion of subordinate_models()() specific to derived model classes

- virtual void update_from_subordinate_model (bool recurse_flag=true)

  propagate vars/labels/bounds/targets from the bottom up

- virtual Interface & interface ()

  or NestedModel::optionalInterface

- virtual void primary_response_fn_weights (const RealVector &wts, bool recurse_flag=true)

  squares terms

- virtual void surrogate_bypass (bool bypass_flag)

  models contained within this model

- virtual void surrogate_function_indices (const IntSet &surr_fn_indices)

  set the (currently active) surrogate function index set

- virtual void build_approximation ()

  build a new SurrogateModel approximation

- virtual bool build_approximation (const Variables &vars, const Response &response)

  response at vars

- virtual void update_approximation (bool rebuild_flag)

  based on data updates propagated elsewhere

- virtual void update_approximation (const Variables &vars, const Response &response, bool rebuild_flag)

  replace the anchor point data within an existing surrogate

- virtual void update_approximation (const VariablesArray &vars_array, const ResponseArray &resp_array, bool rebuild_flag)

  replace the data points within an existing surrogate

- virtual void append_approximation (bool rebuild_flag)

  based on data updates propagated elsewhere

- virtual void append_approximation (const Variables &vars, const Response &response, bool rebuild_flag)

  append a single point to an existing surrogate's data

- virtual void append_approximation (const VariablesArray &vars_array, const ResponseArray &resp_array, bool rebuild_flag)

  append multiple points to an existing surrogate's data

- virtual void pop_approximation (bool save_sdp_set)

  of SurrogateDataPoint set for use in restore_approximation()

- virtual void restore_approximation ()

  restore a previous approximation data state within a surrogate

- virtual bool restore_available ()

  query for whether a trial increment is restorable within a surrogate

- virtual void finalize_approximation ()

  finalize an approximation by applying all previous trial increments

- virtual bool force_rebuild ()

  based on changes in the inactive data

- virtual std::vector< Approximation > & approximations ()

  retrieve the set of Approximations within a DataFitSurrModel

- virtual const RealVectorArray & approximation_coefficients ()

  within a DataFitSurrModel

- virtual void approximation_coefficients (const RealVectorArray &approx_coeffs)

  a DataFitSurrModel

- virtual const RealVector & approximation_variances (const RealVector &c_vars)

  Approximation within a DataFitSurrModel.

- virtual const SDPList & approximation_data (size_t index)

  instance within a DataFitSurrModel

- virtual void compute_correction (const Response &truth_response, const Response &approx_response, const RealVector &c_vars)

  compute correction factors for use in SurrogateModels

- virtual void auto_correction (bool correction_flag)

  manages automatic application of correction factors in SurrogateModels

- virtual bool auto_correction ()

  model's responses

- virtual void apply_correction (Response &approx_response, const RealVector &c_vars, bool quiet_flag=false)

  apply correction factors to approx_response (for use in SurrogateModels)

- virtual void component_parallel_mode (short mode)

  or 2 (SUB_MODEL/ACTUAL_MODEL/HF_MODEL/TRUTH_MODEL)].

- virtual String local_eval_synchronization ()

  return derived model synchronization setting

- virtual int local_eval_concurrency ()

return derived model asynchronous evaluation concurrency

- virtual void serve ()

  a termination message is received from stop_servers().

- virtual void stop_servers ()

  particular model when iteration on the model is complete.

- virtual bool derived_master_overload () const

  of trying to run a multiprocessor job on the master.

- virtual void inactive_view (short view, bool recurse_flag=true)

  update the Model's inactive view based on higher level (nested) context

- virtual const String & interface_id () const

  return the interface identifier

- virtual int evaluation_id () const

  Return the current function evaluation id for the Model.

- virtual void set_evaluation_reference ()

  Set the reference points for the evaluation counters within the Model.

- virtual void fine_grained_evaluation_counters ()

  Request fine-grained evaluation reporting within the Model.

- virtual void print_evaluation_summary (std::ostream &s, bool minimal_header=false, bool relative_count=true) const

  Print an evaluation summary for the Model.

- ModelList & subordinate_models (bool recurse_flag=true)

  return the sub-models in nested and surrogate models

- void compute_response ()

  Compute the Response at currentVariables (default ActiveSet).

- void compute_response (const ActiveSet &set)

  Compute the Response at currentVariables (specified ActiveSet).

- void asynch_compute_response ()

  Response at currentVariables (default ActiveSet).

- void asynch_compute_response (const ActiveSet &set)

  Response at currentVariables (specified ActiveSet).

- const IntResponseMap & synchronize ()

complete set of results from a group of asynchronous evaluations.

- const IntResponseMap & synchronize_nowait ()

  available results from a group of asynchronous evaluations.

- void init_communicators (const int &max_iterator_concurrency, bool recurse_flag=true)

  configuration in modelPCIterMap

- void init_serial ()

  modify some default settings to behave properly in serial.

- void set_communicators (const int &max_iterator_concurrency, bool recurse_flag=true)

  from modelPCIterMap)

- void free_communicators (const int &max_iterator_concurrency, bool recurse_flag=true)

  deallocate communicator partitions for a model

- void stop_configurations ()

  terminate serve_configurations() on other iteratorComm processors

- int serve_configurations ()

  to balance init_communicators() calls on iteratorComm rank 0

- void estimate_message_lengths ()

  estimate messageLengths for a model

- void assign_rep (Model *model_rep, bool ref_count_incr=true)

  replaces existing letter with a new one

- size_t tv () const

  returns total number of vars

- size_t cv () const

  returns number of active continuous variables

- size_t div () const

  returns number of active discrete integer vars

- size_t drv () const

  returns number of active discrete real vars

- size_t icv () const

  returns number of inactive continuous variables

- size_t idiv () const

  returns number of inactive discrete integer vars

- size_t idrv () const

  returns number of inactive discrete real vars

- size_t acv () const

  returns total number of continuous variables

- size_t adiv () const

  returns total number of discrete integer vars

- size_t adrv () const

  returns total number of discrete real vars

- void active_variables (const Variables &vars)

  set the active variables in currentVariables

- const RealVector & continuous_variables () const

  return the active continuous variables from currentVariables

- void continuous_variables (const RealVector &c_vars)

  set the active continuous variables in currentVariables

- void continuous_variable (const Real &c_var, const size_t &i)

  set an active continuous variable in currentVariables

- const IntVector & discrete_int_variables () const

  return the active discrete integer variables from currentVariables

- void discrete_int_variables (const IntVector &d_vars)

  set the active discrete integer variables in currentVariables

- void discrete_int_variable (const int &d_var, const size_t &i)

  set an active discrete integer variable in currentVariables

- const RealVector & discrete_real_variables () const

  return the active discrete real variables from currentVariables

- void discrete_real_variables (const RealVector &d_vars)

  set the active discrete real variables in currentVariables

- void discrete_real_variable (const Real &d_var, const size_t &i)

  set an active discrete real variable in currentVariables

- UShortMultiArrayConstView continuous_variable_types () const

  return the active continuous variable types from currentVariables

- UShortMultiArrayConstView discrete_int_variable_types () const
  return the active discrete variable types from currentVariables
- UShortMultiArrayConstView discrete_real_variable_types () const
  return the active discrete variable types from currentVariables
- SizetMultiArrayConstView continuous_variable_ids () const
  return the active continuous variable identifiers from currentVariables
- const RealVector & inactive_continuous_variables () const
  return the inactive continuous variables in currentVariables
- void inactive_continuous_variables (const RealVector &i_c_vars)
  set the inactive continuous variables in currentVariables
- const IntVector & inactive_discrete_int_variables () const
  return the inactive discrete variables in currentVariables
- void inactive_discrete_int_variables (const IntVector &i_d_vars)
  set the inactive discrete variables in currentVariables
- const RealVector & inactive_discrete_real_variables () const
  return the inactive discrete variables in currentVariables
- void inactive_discrete_real_variables (const RealVector &i_d_vars)
  set the inactive discrete variables in currentVariables
- SizetMultiArrayConstView inactive_continuous_variable_ids () const
  return the inactive continuous variable identifiers from currentVariables
- const RealVector & all_continuous_variables () const
  return all continuous variables in currentVariables
- void all_continuous_variables (const RealVector &a_c_vars)
  set all continuous variables in currentVariables
- void all_continuous_variable (const Real &a_c_var, const size_t &i)
  set a variable within the all continuous variables in currentVariables
- const IntVector & all_discrete_int_variables () const
  return all discrete variables in currentVariables
- void all_discrete_int_variables (const IntVector &a_d_vars)
  set all discrete variables in currentVariables
- void all_discrete_int_variable (const int &a_d_var, const size_t &i)

set a variable within the all discrete variables in currentVariables

- const RealVector & all_discrete_real_variables () const
  return all discrete variables in currentVariables
- void all_discrete_real_variables (const RealVector &a_d_vars)
  set all discrete variables in currentVariables
- void all_discrete_real_variable (const Real &a_d_var, const size_t &i)
  set a variable within the all discrete variables in currentVariables
- UShortMultiArrayConstView all_continuous_variable_types () const
  return all continuous variable types from currentVariables
- UShortMultiArrayConstView all_discrete_int_variable_types () const
  return all discrete variable types from currentVariables
- UShortMultiArrayConstView all_discrete_real_variable_types () const
  return all discrete variable types from currentVariables
- SizetMultiArrayConstView all_continuous_variable_ids () const
  return all continuous variable identifiers from currentVariables
- const IntSetArray & discrete_design_set_int_values () const
  design set integer variables
- void discrete_design_set_int_values (const IntSetArray &isa)
  design set integer variables
- const RealSetArray & discrete_design_set_real_values () const
  design set integer variables
- void discrete_design_set_real_values (const RealSetArray &rsa)
  design set integer variables
- Pecos::DistributionParams & distribution_parameters ()
  return distribParams
- void distribution_parameters (const Pecos::DistributionParams &dp)
  set distribParams
- const IntSetArray & discrete_state_set_int_values () const
  state set integer variables
- void discrete_state_set_int_values (const IntSetArray &isa)
  state set integer variables

- const RealSetArray & discrete_state_set_real_values () const
  state set integer variables
- void discrete_state_set_real_values (const RealSetArray &rsa)
  state set integer variables
- StringMultiArrayConstView continuous_variable_labels () const
  return the active continuous variable labels from currentVariables
- void continuous_variable_labels (StringMultiArrayConstView c_v_labels)
  set the active continuous variable labels in currentVariables
- StringMultiArrayConstView discrete_int_variable_labels () const
  return the active discrete variable labels from currentVariables
- void discrete_int_variable_labels (StringMultiArrayConstView d_v_labels)
  set the active discrete variable labels in currentVariables
- StringMultiArrayConstView discrete_real_variable_labels () const
  return the active discrete variable labels from currentVariables
- void discrete_real_variable_labels (StringMultiArrayConstView d_v_labels)
  set the active discrete variable labels in currentVariables
- StringMultiArrayConstView inactive_continuous_variable_labels () const
  return the inactive continuous variable labels in currentVariables
- void inactive_continuous_variable_labels (StringMultiArrayConstView i_c_v_labels)
  set the inactive continuous variable labels in currentVariables
- StringMultiArrayConstView inactive_discrete_int_variable_labels () const
  return the inactive discrete variable labels in currentVariables
- void inactive_discrete_int_variable_labels (StringMultiArrayConstView i_d_v_labels)
  set the inactive discrete variable labels in currentVariables
- StringMultiArrayConstView inactive_discrete_real_variable_labels () const
  return the inactive discrete variable labels in currentVariables
- void inactive_discrete_real_variable_labels (StringMultiArrayConstView i_d_v_labels)
  set the inactive discrete variable labels in currentVariables
- StringMultiArrayConstView all_continuous_variable_labels () const
  return all continuous variable labels in currentVariables

- void all_continuous_variable_labels (StringMultiArrayConstView a_c_v_labels)
  set all continuous variable labels in currentVariables
- void all_continuous_variable_label (const String &a_c_v_label, const size_t &i)
  set a label within the all continuous labels in currentVariables
- StringMultiArrayConstView all_discrete_int_variable_labels () const
  return all discrete variable labels in currentVariables
- void all_discrete_int_variable_labels (StringMultiArrayConstView a_d_v_labels)
  set all discrete variable labels in currentVariables
- void all_discrete_int_variable_label (const String &a_d_v_label, const size_t &i)
  set a label within the all discrete labels in currentVariables
- StringMultiArrayConstView all_discrete_real_variable_labels () const
  return all discrete variable labels in currentVariables
- void all_discrete_real_variable_labels (StringMultiArrayConstView a_d_v_labels)
  set all discrete variable labels in currentVariables
- void all_discrete_real_variable_label (const String &a_d_v_label, const size_t &i)
  set a label within the all discrete labels in currentVariables
- const StringArray & response_labels () const
  return the response labels from currentResponse
- void response_labels (const StringArray &resp_labels)
  set the response labels in currentResponse
- const RealVector & continuous_lower_bounds () const
  return the active continuous lower bounds from userDefinedConstraints
- void continuous_lower_bounds (const RealVector &c_l_bnds)
  set the active continuous lower bounds in userDefinedConstraints
- const RealVector & continuous_upper_bounds () const
  return the active continuous upper bounds from userDefinedConstraints
- void continuous_upper_bounds (const RealVector &c_u_bnds)
  set the active continuous upper bounds in userDefinedConstraints
- const IntVector & discrete_int_lower_bounds () const
  return the active discrete lower bounds from userDefinedConstraints
- void discrete_int_lower_bounds (const IntVector &d_l_bnds)

set the active discrete lower bounds in userDefinedConstraints

- const IntVector & discrete_int_upper_bounds () const
  return the active discrete upper bounds from userDefinedConstraints
- void discrete_int_upper_bounds (const IntVector &d_u_bnds)
  set the active discrete upper bounds in userDefinedConstraints
- const RealVector & discrete_real_lower_bounds () const
  return the active discrete lower bounds from userDefinedConstraints
- void discrete_real_lower_bounds (const RealVector &d_l_bnds)
  set the active discrete lower bounds in userDefinedConstraints
- const RealVector & discrete_real_upper_bounds () const
  return the active discrete upper bounds from userDefinedConstraints
- void discrete_real_upper_bounds (const RealVector &d_u_bnds)
  set the active discrete upper bounds in userDefinedConstraints
- const RealVector & inactive_continuous_lower_bounds () const
  return the inactive continuous lower bounds in userDefinedConstraints
- void inactive_continuous_lower_bounds (const RealVector &i_c_l_bnds)
  set the inactive continuous lower bounds in userDefinedConstraints
- const RealVector & inactive_continuous_upper_bounds () const
  return the inactive continuous upper bounds in userDefinedConstraints
- void inactive_continuous_upper_bounds (const RealVector &i_c_u_bnds)
  set the inactive continuous upper bounds in userDefinedConstraints
- const IntVector & inactive_discrete_int_lower_bounds () const
  return the inactive discrete lower bounds in userDefinedConstraints
- void inactive_discrete_int_lower_bounds (const IntVector &i_d_l_bnds)
  set the inactive discrete lower bounds in userDefinedConstraints
- const IntVector & inactive_discrete_int_upper_bounds () const
  return the inactive discrete upper bounds in userDefinedConstraints
- void inactive_discrete_int_upper_bounds (const IntVector &i_d_u_bnds)
  set the inactive discrete upper bounds in userDefinedConstraints
- const RealVector & inactive_discrete_real_lower_bounds () const
  return the inactive discrete lower bounds in userDefinedConstraints

- void inactive_discrete_real_lower_bounds (const RealVector &i_d_l_bnds)
  set the inactive discrete lower bounds in userDefinedConstraints
- const RealVector & inactive_discrete_real_upper_bounds () const
  return the inactive discrete upper bounds in userDefinedConstraints
- void inactive_discrete_real_upper_bounds (const RealVector &i_d_u_bnds)
  set the inactive discrete upper bounds in userDefinedConstraints
- const RealVector & all_continuous_lower_bounds () const
  return all continuous lower bounds in userDefinedConstraints
- void all_continuous_lower_bounds (const RealVector &a_c_l_bnds)
  set all continuous lower bounds in userDefinedConstraints
- void all_continuous_lower_bound (const Real &a_c_l_bnd, const size_t &i)
  userDefinedConstraints
- const RealVector & all_continuous_upper_bounds () const
  return all continuous upper bounds in userDefinedConstraints
- void all_continuous_upper_bounds (const RealVector &a_c_u_bnds)
  set all continuous upper bounds in userDefinedConstraints
- void all_continuous_upper_bound (const Real &a_c_u_bnd, const size_t &i)
  userDefinedConstraints
- const IntVector & all_discrete_int_lower_bounds () const
  return all discrete lower bounds in userDefinedConstraints
- void all_discrete_int_lower_bounds (const IntVector &a_d_l_bnds)
  set all discrete lower bounds in userDefinedConstraints
- void all_discrete_int_lower_bound (const int &a_d_l_bnd, const size_t &i)
  userDefinedConstraints
- const IntVector & all_discrete_int_upper_bounds () const
  return all discrete upper bounds in userDefinedConstraints
- void all_discrete_int_upper_bounds (const IntVector &a_d_u_bnds)
  set all discrete upper bounds in userDefinedConstraints
- void all_discrete_int_upper_bound (const int &a_d_u_bnd, const size_t &i)
  userDefinedConstraints

- const RealVector & all_discrete_real_lower_bounds () const
  return all discrete lower bounds in userDefinedConstraints
- void all_discrete_real_lower_bounds (const RealVector &a_d_l_bnds)
  set all discrete lower bounds in userDefinedConstraints
- void all_discrete_real_lower_bound (const Real &a_d_l_bnd, const size_t &i)
  userDefinedConstraints
- const RealVector & all_discrete_real_upper_bounds () const
  return all discrete upper bounds in userDefinedConstraints
- void all_discrete_real_upper_bounds (const RealVector &a_d_u_bnds)
  set all discrete upper bounds in userDefinedConstraints
- void all_discrete_real_upper_bound (const Real &a_d_u_bnd, const size_t &i)
  userDefinedConstraints
- size_t num_linear_ineq_constraints () const
  return the number of linear inequality constraints
- size_t num_linear_eq_constraints () const
  return the number of linear equality constraints
- const RealMatrix & linear_ineq_constraint_coeffs () const
  return the linear inequality constraint coefficients
- void linear_ineq_constraint_coeffs (const RealMatrix &lin_ineq_coeffs)
  set the linear inequality constraint coefficients
- const RealVector & linear_ineq_constraint_lower_bounds () const
  return the linear inequality constraint lower bounds
- void linear_ineq_constraint_lower_bounds (const RealVector &lin_ineq_l_bnds)
  set the linear inequality constraint lower bounds
- const RealVector & linear_ineq_constraint_upper_bounds () const
  return the linear inequality constraint upper bounds
- void linear_ineq_constraint_upper_bounds (const RealVector &lin_ineq_u_bnds)
  set the linear inequality constraint upper bounds
- const RealMatrix & linear_eq_constraint_coeffs () const
  return the linear equality constraint coefficients
- void linear_eq_constraint_coeffs (const RealMatrix &lin_eq_coeffs)

set the linear equality constraint coefficients

- const RealVector & linear_eq_constraint_targets () const

  return the linear equality constraint targets

- void linear_eq_constraint_targets (const RealVector &lin_eq_targets)

  set the linear equality constraint targets

- size_t num_nonlinear_ineq_constraints () const

  return the number of nonlinear inequality constraints

- size_t num_nonlinear_eq_constraints () const

  return the number of nonlinear equality constraints

- const RealVector & nonlinear_ineq_constraint_lower_bounds () const

  return the nonlinear inequality constraint lower bounds

- void nonlinear_ineq_constraint_lower_bounds (const RealVector &nln_ineq_l_bnds)

  set the nonlinear inequality constraint lower bounds

- const RealVector & nonlinear_ineq_constraint_upper_bounds () const

  return the nonlinear inequality constraint upper bounds

- void nonlinear_ineq_constraint_upper_bounds (const RealVector &nln_ineq_u_bnds)

  set the nonlinear inequality constraint upper bounds

- const RealVector & nonlinear_eq_constraint_targets () const

  return the nonlinear equality constraint targets

- void nonlinear_eq_constraint_targets (const RealVector &nln_eq_targets)

  set the nonlinear equality constraint targets

- const Variables & current_variables () const

  return the current variables (currentVariables)

- const Constraints & user_defined_constraints () const

  return the user-defined constraints (userDefinedConstraints)

- const Response & current_response () const

  return the current response (currentResponse)

- ProblemDescDB & problem_description_db () const

  return the problem description database (probDescDB)

- ParallelLibrary & parallel_library () const

  return the parallel library (parallelLib)

- const String & model_type () const

  return the model type (modelType)

- const String & model_id () const

  return the model identifier (idModel)

- size_t num_functions () const

  return number of functions in currentResponse

- const String & gradient_type () const

  return the gradient evaluation type (gradType)

- const String & method_source () const

  return the numerical gradient evaluation method source (methodSrc)

- const String & interval_type () const

  return the numerical gradient evaluation interval type (intervalType)

- bool ignore_bounds () const

  option for ignoring bounds when numerically estimating derivatives

- bool central_hess () const

  option for using old 2nd-order scheme when computing finite-diff Hessian

- const RealVector & fd_gradient_step_size () const

  return the finite difference gradient step size (fdGradSS)

- const IntList & gradient_id_analytic () const

  return the mixed gradient analytic IDs (gradIdAnalytic)

- const IntList & gradient_id_numerical () const

  return the mixed gradient numerical IDs (gradIdNumerical)

- const String & hessian_type () const

  return the Hessian evaluation type (hessType)

- const String & quasi_hessian_type () const

  return the Hessian evaluation type (quasiHessType)

- const RealVector & fd_hessian_by_grad_step_size () const

  return gradient-based finite difference Hessian step size (fdHessByGradSS)

- const RealVector & fd_hessian_by_fn_step_size () const

  return function-based finite difference Hessian step size (fdHessByFnSS)

- const IntList & hessian_id_analytic () const

  return the mixed Hessian analytic IDs (hessIdAnalytic)

- const IntList & hessian_id_numerical () const

  return the mixed Hessian analytic IDs (hessIdNumerical)

- const IntList & hessian_id_quasi () const

  return the mixed Hessian analytic IDs (hessIdQuasi)

- const RealVector & primary_response_fn_weights () const

  squares terms. Used by ConcurrentStrategy for Pareto set optimization.

- void supports_estimated_derivatives (bool sed_flag)

  set whether this model should perform or pass on derivative estimation

- void init_comms_bcast_flag (bool icb_flag)

  set initCommsBcastFlag

- int evaluation_capacity () const

  return the evaluation capacity for use in iterator logic

- int derivative_concurrency () const

  return the gradient concurrency for use in parallel configuration logic

- bool asynch_flag () const

  return the asynchronous evaluation flag (asynchEvalFlag)

- void asynch_flag (const bool flag)

  set the asynchronous evaluation flag (asynchEvalFlag)

- short output_level () const

  return the outputLevel

- void output_level (const short level)

  set the outputLevel

- const IntArray & message_lengths () const

  return the array of MPI packed message buffer lengths (messageLengths)

- void parallel_configuration_iterator (const ParConfigLIter &pc_iter)

  set modelPCIter

- const ParConfigLIter & parallel_configuration_iterator () const

  return modelPCIter

- void auto_graphics (const bool flag)

the model as opposed to graphics posting at the strategy level).

- bool is_null () const

  function to check modelRep (does this envelope contain a letter)

- Model ∗ model_rep () const

  that are not mapped to the top Model level

- Real FDstep1 (FDhelp ∗, Real h_mag, size_t i)

  function returning finite-difference step size (affected by bounds)

- Real FDstep2 (FDhelp ∗, Real h, size_t j)

  by bounds)

Protected Member Functions

- Model (BaseConstructor, ProblemDescDB &problem_db)

  derived class constructors - Coplien, p. 139)

- Model (NoDBBaseConstructor, ParallelLibrary &parallel_lib, const SharedVariablesData &svd, const ActiveSet &set)

  constructed on the fly

- Model (RecastBaseConstructor, ProblemDescDB &problem_db, ParallelLibrary &parallel_lib)

  constructed on the fly

- virtual void derived_compute_response (const ActiveSet &set)

  portion of compute_response() specific to derived model classes

- virtual void derived_asynch_compute_response (const ActiveSet &set)

  portion of asynch_compute_response() specific to derived model classes

- virtual const IntResponseMap & derived_synchronize ()

  portion of synchronize() specific to derived model classes

- virtual const IntResponseMap & derived_synchronize_nowait ()

  portion of synchronize_nowait() specific to derived model classes

- virtual void derived_init_communicators (const int &max_iterator_concurrency, bool recurse_flag=true)

  portion of init_communicators() specific to derived model classes

- virtual void derived_init_serial ()

  portion of init_serial() specific to derived model classes

- virtual void derived_set_communicators (const int &max_iterator_concurrency, bool recurse_flag=true)

portion of set_communicators() specific to derived model classes

- virtual void derived_free_communicators (const int &max_iterator_concurrency, bool recurse_flag=true)

  portion of free_communicators() specific to derived model classes

Protected Attributes

- Variables currentVariables

  function evaluations

- size_t numDerivVars

  corrections where only the active continuous variables are supported)

- Response currentResponse

  function evaluations

- size_t numFns

  the number of functions in currentResponse

- Constraints userDefinedConstraints

  an iterator at startup.

- String modelType

  type of model: single, nested, or surrogate

- String surrogateType

  type of surrogate model: local_∗, multipoint_∗, global_∗, or hierarchical

- String gradType

  grad type: none,numerical,analytic,mixed

- String methodSrc

  method source: dakota,vendor

- String intervalType

  interval type: forward,central

- bool ignoreBounds

  option to ignore bounds when computing finite differences

- bool centralHess

  option to use old 2nd-order finite diffs for Hessians

- RealVector fdGradSS

  relative step sizes for numerical gradients

- IntList gradIdAnalytic

  analytic id's for mixed gradients

- IntList gradIdNumerical

  numerical id's for mixed gradients

- String hessType

  Hess type: none,numerical,quasi,analytic,mixed.

- String quasiHessType

  quasi-Hessian type: bfgs, damped_bfgs, sr1

- RealVector fdHessByGradSS

  relative step sizes for numerical Hessians estimated with 1st-order grad differences

- RealVector fdHessByFnSS

  relative step sizes for numerical Hessians estimated with 2nd-order fn differences

- IntList hessIdAnalytic

  analytic id's for mixed Hessians

- IntList hessIdNumerical

  numerical id's for mixed Hessians

- IntList hessIdQuasi

  quasi id's for mixed Hessians

- bool supportsEstimDerivs

  whether model should perform or forward derivative estimation

- IntArray messageLengths

  and PRPair

- ProblemDescDB & probDescDB

  class member reference to the problem description database

- ParallelLibrary & parallelLib

  class member reference to the parallel library

- ParConfigLIter modelPCIter

  the ParallelConfiguration node used by this model instance

- short componentParallelMode

  (SUB_MODEL/HF_MODEL/TRUTH_MODEL)

- bool asynchEvalFlag

  flags asynch evaluations (local or distributed)

- short outputLevel

  output verbosity level: {SILENT,QUIET,NORMAL,VERBOSE,DEBUG}_OUTPUT

- IntSetArray discreteDesignSetIntValues

  values corresponding to discrete design integer set variable

- RealSetArray discreteDesignSetRealValues

  values corresponding to discrete design real set variable

- Pecos::DistributionParams distParams

  container for random variable distribution parameters

- IntSetArray discreteStateSetIntValues

  values corresponding to discrete state integer set variable

- RealSetArray discreteStateSetRealValues

  values corresponding to discrete state real set variable

- RealVector primaryRespFnWts

  multiobjective optimization or weighted least squares)

Private Member Functions

- Model * get_model (ProblemDescDB &problem_db)

  Used by the envelope to instantiate the correct letter class.

- int estimate_derivatives (const ShortArray &map_asv, const ShortArray &fd_grad_asv, const ShortArray &fd_hess_asv, const ShortArray &quasi_hess_asv, const ActiveSet &original_set, const bool asynch_-flag)

  method_source) in the numerical gradient specification.

- void synchronize_derivatives (const Variables &vars, const IntResponseMap &fd_responses, Response &new_response, const ShortArray &fd_grad_asv, const ShortArray &fd_hess_asv, const ShortArray &quasi_hess_asv, const ActiveSet &original_set)

  objects (fd_grad_responses) into a single response (new_response)

- void update_response (const Variables &vars, Response &new_response, const ShortArray &fd_grad_-asv, const ShortArray &fd_hess_asv, const ShortArray &quasi_hess_asv, const ActiveSet &original_set, Response &initial_map_response, const RealMatrix &new_fn_grads, const RealSymMatrixArray &new_-fn_hessians)

  overlay results to update a response object

- void update_quasi_hessians (const Variables &vars, Response &new_response, const ActiveSet &original_set)

  perform quasi-Newton Hessian updates

- bool manage_asv (const ShortArray &asv_in, ShortArray &map_asv_out, ShortArray &fd_grad_asv_out, ShortArray &fd_hess_asv_out, ShortArray &quasi_hess_asv_out)

  Coordinates usage of estimate_derivatives() calls based on asv_in.

Private Attributes

- String idModel

  model identifier string from the input file

- int modelEvalId

  evaluations are assimilated into a single higher level evaluation)

- bool estDerivsFlag

  asynch_compute_response()

- int evaluationCapacity

  capacity for concurrent evaluations supported by the Model

- std::map< int, ParConfigLIter > modelPCIterMap

  level as the lookup key

- bool initCommsBcastFlag

  init_communicators(); set from Strategy::init_iterator()

- bool modelAutoGraphicsFlag

  graphics posting at the strategy level)

- ModelList modelList

  used to collect sub-models for subordinate_models()

- VariablesList varsList

  synchronize().

- std::list< ShortArray > asvList

  asynch_compute_response() to synchronize()

- std::list< ActiveSet > setList

  asynch_compute_response() to synchronize()

- BoolList initialMapList

  synchronize_derivatives()

- BoolList dbCaptureList

  synchronize_derivatives()

- ResponseList dbResponseList

  synchronize_derivatives()

- RealList deltaList

  transfers deltas from estimate_derivatives() to synchronize_derivatives()

- IntIntMap numFDEvalsMap

  responses into numerical gradients.

- IntIntMap rawEvalIdMap

  for rekeying responseMap.

- RealVectorArray xPrev

  previous parameter vectors used in computing s for quasi-Newton updates

- RealMatrix fnGradsPrev

  previous gradient vectors used in computing y for quasi-Newton updates

- RealSymMatrixArray quasiHessians

  quasi-Newton Hessian approximations

- SizetArray numQuasiUpdates

  number of quasi-Newton Hessian updates applied

- IntResponseMap responseMap

  concatenated form. The similar map in Interface contains raw responses.

- IntResponseMap graphicsRespMap

  to sequential input into the graphics

- Model * modelRep

  pointer to the letter (initialized only for the envelope)

- int referenceCount

  number of objects sharing modelRep

Classes

- struct FDhelp

  possibly adjusted for bounds

8.60.1 Detailed Description

Base class for the model class hierarchy.

The Model class is the base class for one of the primary class hierarchies in DAKOTA. The model hierarchy contains a set of variables, an interface, and a set of responses, and an iterator operates on the model to map the variables into responses using the interface. For memory efficiency and enhanced polymorphism, the model hierarchy employs the "letter/envelope idiom" (see Coplien "Advanced C++", p. 133), for which the base class (Model) serves as the envelope and one of the derived classes (selected in Model::get_model()) serves as the letter.

8.60.2 Constructor & Destructor Documentation

8.60.2.1 Model ()

default constructor

The default constructor is used in vector<Model> instantiations and for initialization of Model objects contained in Iterator and derived Strategy classes. modelRep is NULL in this case (a populated problem_db is needed to build a meaningful Model object). This makes it necessary to check for NULL in the copy constructor, assignment operator, and destructor.

8.60.2.2 Model (ProblemDescDB & *problem_db*)

standard constructor for envelope

Used in model instantiations within strategy constructors. Envelope constructor only needs to extract enough data to properly execute get_model, since Model(BaseConstructor, problem_db) builds the actual base class data for the derived models.

8.60.2.3 Model (const Model & *model*)

copy constructor

Copy constructor manages sharing of modelRep and incrementing of referenceCount.

8.60.2.4 ~Model () [virtual]

destructor

Destructor decrements referenceCount and only deletes modelRep when referenceCount reaches zero.

8.60.2.5 Model (BaseConstructor, ProblemDescDB & *problem_db*) [protected]

derived class constructors - Coplien, p. 139)

This constructor builds the base class data for all inherited models. get_model() instantiates a derived class and the derived class selects this base class constructor in its initialization list (to avoid the recursion of the base class constructor calling get_model() again). Since the letter IS the representation, its representation pointer is set to NULL (an uninitialized pointer causes problems in ~Model).

8.60.2.6 Model (RecastBaseConstructor, ProblemDescDB & *problem_db*, ParallelLibrary & *parallel_lib*) [protected]

constructed on the fly

This constructor also builds the base class data for inherited models. However, it is used for recast models which are instantiated on the fly. Therefore it only initializes a small subset of attributes. Note that parallel_lib is managed separately from problem_db since parallel_lib is needed even in cases where problem_db is an empty envelope (i.e., use of dummy_db in Model(NoDBBaseConstructor) above.

8.60.3 Member Function Documentation

8.60.3.1 Model operator= (const Model & *model*)

assignment operator

Assignment operator decrements referenceCount for old modelRep, assigns new modelRep, and increments referenceCount for new modelRep.

8.60.3.2 Iterator & subordinate_iterator () [virtual]

return the sub-iterator in nested and surrogate models

return by reference requires use of dummy objects, but is important to allow use of assign_rep() since this operation must be performed on the original envelope object.

Reimplemented in DataFitSurrModel, NestedModel, and RecastModel.

8.60.3.3 Model & subordinate_model () [virtual]

dive through model recursions that may bypass some components.

return by reference requires use of dummy objects, but is important to allow use of assign_rep() since this operation must be performed on the original envelope object.

Reimplemented in NestedModel, RecastModel, and SurrogateModel.

8.60.3.4 Model & surrogate_model () [virtual]

return the approximation sub-model in surrogate models

return by reference requires use of dummy objects, but is important to allow use of assign_rep() since this operation must be performed on the original envelope object.

Reimplemented in DataFitSurrModel, HierarchSurrModel, and RecastModel.

8.60.3.5 Model & truth_model () [virtual]

return the truth sub-model in surrogate models

return by reference requires use of dummy objects, but is important to allow use of assign_rep() since this operation must be performed on the original envelope object.

Reimplemented in DataFitSurrModel, HierarchSurrModel, and RecastModel.

8.60.3.6 void update_from_subordinate_model (bool *recurse_flag* = `true`) `[virtual]`

propagate vars/labels/bounds/targets from the bottom up

used only for instantiate-on-the-fly model recursions (all RecastModel instantiations and alternate DataFitSurrModel instantiations). Single, Hierarchical, and Nested Models do not redefine the function since they do not support instantiate-on-the-fly. This means that the recursion will stop as soon as it encounters a Model that was instantiated normally, which is appropriate since ProblemDescDB-constructed Models use top-down information flow and do not require bottom-up updating.

Reimplemented in DataFitSurrModel, and RecastModel.

8.60.3.7 Interface & interface () `[virtual]`

or NestedModel::optionalInterface

return by reference requires use of dummy objects, but is important to allow use of assign_rep() since this operation must be performed on the original envelope object.

Reimplemented in DataFitSurrModel, NestedModel, RecastModel, and SingleModel.

8.60.3.8 String local_eval_synchronization () `[virtual]`

return derived model synchronization setting

SingleModels and HierarchSurrModels redefine this virtual function. A default value of "synchronous" prevents asynch local operations for:

- NestedModels: a subIterator can support message passing parallelism, but not asynch local.
- DataFitSurrModels: while asynch evals on approximations will work due to some added bookkeeping, avoiding them is preferable.

Reimplemented in RecastModel, and SingleModel.

8.60.3.9 int local_eval_concurrency () `[virtual]`

return derived model asynchronous evaluation concurrency

SingleModels and HierarchSurrModels redefine this virtual function.

Reimplemented in RecastModel, and SingleModel.

8.60.3.10 const String & interface_id () const `[virtual]`

return the interface identifier

return by reference requires use of dummy objects, but is important to allow use of assign_rep() since this operation must be performed on the original envelope object.

Reimplemented in DataFitSurrModel, NestedModel, RecastModel, and SingleModel.

8.60.3.11 ModelList & subordinate_models (bool *recurse_flag* = `true`)

return the sub-models in nested and surrogate models

since modelList is built with list insertions (using envelope copies), these models may not be used for model.assign_rep() since this operation must be performed on the original envelope object. They may, however, be used for letter-based operations (including assign_rep() on letter contents such as an interface).

8.60.3.12 void init_communicators (const int & *max_iterator_concurrency*, bool *recurse_flag* = `true`)

configuration in modelPCIterMap

The init_communicators() and derived_init_communicators() functions are stuctured to avoid performing the messageLengths estimation more than once. init_communicators() (not virtual) performs the estimation and then forwards the results to derived_init_communicators (virtual) which uses the data in different contexts.

8.60.3.13 void init_serial ()

modify some default settings to behave properly in serial.

The init_serial() and derived_init_serial() functions are stuctured to separate base class (common) operations from derived class (specialized) operations.

8.60.3.14 void estimate_message_lengths ()

estimate messageLengths for a model

This functionality has been pulled out of init_communicators() and defined separately so that it may be used in those cases when messageLengths is needed but model.init_communicators() is not called, e.g., for the master processor in the self-scheduling of a concurrent iterator strategy.

8.60.3.15 void assign_rep (Model * *model_rep*, bool *ref_count_incr* = `true`)

replaces existing letter with a new one

Similar to the assignment operator, the assign_rep() function decrements referenceCount for the old modelRep and assigns the new modelRep. It is different in that it is used for publishing derived class letters to existing envelopes, as opposed to sharing representations among multiple envelopes (in particular, assign_rep is passed a letter object and operator= is passed an envelope object). Letter assignment supports two models as governed by ref_count_incr:

- ref_count_incr = true (default): the incoming letter belongs to another envelope. In this case, increment the reference count in the normal manner so that deallocation of the letter is handled properly.

- ref_count_incr = false: the incoming letter is instantiated on the fly and has no envelope. This case is modeled after get_model(): a letter is dynamically allocated using new and passed into assign_rep, the letter's reference count is not incremented, and the letter is not remotely deleted (its memory management is passed over to the envelope).

8.60.3.16 int derivative_concurrency () const

return the gradient concurrency for use in parallel configuration logic

This function assumes derivatives with respect to the active continuous variables. Therefore, concurrency with respect to the inactive continuous variables is not captured.

8.60.3.17 Real FDstep1 (FDhelp * *fdh*, Real *h_mag*, size_t *j*)

function returning finite-difference step size (affected by bounds)

Auxiliary function to compute forword or first central-difference step size.

8.60.3.18 Real FDstep2 (FDhelp * *fdh*, Real *h*, size_t *j*)

by bounds)

Auxiliary function to second central-difference step size, honoring bounds.

8.60.3.19 Model * get_model (ProblemDescDB & *problem_db*) [private]

Used by the envelope to instantiate the correct letter class.

Used only by the envelope constructor to initialize modelRep to the appropriate derived type, as given by the modelType attribute.

8.60.3.20 int estimate_derivatives (const ShortArray & *map_asv*, const ShortArray & *fd_grad_asv*, const ShortArray & *fd_hess_asv*, const ShortArray & *quasi_hess_asv*, const ActiveSet & *original_set*, const bool *asynch_flag*) [private]

method_source) in the numerical gradient specification.

Estimate derivatives by computing finite difference gradients, finite difference Hessians, and/or quasi-Newton Hessians. The total number of finite difference evaluations is returned for use by synchronize() to track response arrays, and it could be used to improve management of max_function_evaluations within the iterators.

! new logic

8.60.3.21 void synchronize_derivatives (const Variables & *vars*, const IntResponseMap & *fd_responses*, Response & *new_response*, const ShortArray & *fd_grad_asv*, const ShortArray & *fd_hess_asv*, const ShortArray & *quasi_hess_asv*, const ActiveSet & *original_set*) [private]

objects (fd_grad_responses) into a single response (new_response)

Merge an array of fd_responses into a single new_response. This function is used both by synchronous compute_-response() for the case of asynchronous estimate_derivatives() and by synchronize() for the case where one or more asynch_compute_response() calls has employed asynchronous estimate_derivatives().

!

8.60.3.22 void update_response (const Variables & *vars*, Response & *new_response*, const ShortArray & *fd_grad_asv*, const ShortArray & *fd_hess_asv*, const ShortArray & *quasi_hess_asv*, const ActiveSet & *original_set*, Response & *initial_map_response*, const RealMatrix & *new_fn_grads*, const RealSymMatrixArray & *new_fn_hessians*) [private]

overlay results to update a response object

Overlay the initial_map_response with numerically estimated new_fn_grads and new_fn_hessians to populate new_response as governed by asv vectors. Quasi-Newton secant Hessian updates are also performed here, since this is where the gradient data needed for the updates is first consolidated. Convenience function used by estimate_derivatives() for the synchronous case and by synchronize_derivatives() for the asynchronous case.

8.60.3.23 void update_quasi_hessians (const Variables & *vars*, Response & *new_response*, const ActiveSet & *original_set*) [private]

perform quasi-Newton Hessian updates

quasi-Newton updates are performed for approximating response function Hessians using BFGS or SR1 formulations. These Hessians are supported only for the active continuous variables, and a check is performed on the DVV prior to invoking the function.

8.60.3.24 bool manage_asv (const ShortArray & *asv_in*, ShortArray & *map_asv_out*, ShortArray & *fd_grad_asv_out*, ShortArray & *fd_hess_asv_out*, ShortArray & *quasi_hess_asv_out*) [private]

Coordinates usage of estimate_derivatives() calls based on asv_in.

Splits asv_in total request into map_asv_out, fd_grad_asv_out, fd_hess_asv_out, and quasi_hess_asv_out as governed by the responses specification. If the returned use_est_deriv is true, then these asv outputs are used by estimate_derivatives() for the initial map, finite difference gradient evals, finite difference Hessian evals, and quasi-Hessian updates, respectively. If the returned use_est_deriv is false, then only map_asv_out is used.

The documentation for this class was generated from the following files:

- DakotaModel.H
- DakotaModel.C

8.61 Model::FDhelp Struct Reference

possibly adjusted for bounds

Public Attributes

- const RealVector * **Lb**
- const RealVector * **Ub**
- const RealVector * **x0**
- int **shortstep**

8.61.1 Detailed Description

possibly adjusted for bounds

The documentation for this struct was generated from the following file:

- DakotaModel.H

8.62 MPIPackBuffer Class Reference

Class for packing MPI message buffers.

Public Member Functions

- MPIPackBuffer (int size_=1024)

  Constructor, which allows the default buffer size to be set.

- ∼MPIPackBuffer ()

  Desctructor.

- const char ∗ buf ()

  Returns a pointer to the internal buffer that has been packed.

- int size ()

  The number of bytes of packed data.

- int capacity ()

  the allocated size of Buffer.

- void reset ()

  Resets the buffer index in order to reuse the internal buffer.

- void pack (const int ∗data, const int num=1)

  Pack one or more **int's**.

- void pack (const u_int ∗data, const int num=1)

  Pack one or more **unsigned int's**.

- void pack (const long ∗data, const int num=1)

  Pack one or more **long's**.

- void pack (const u_long ∗data, const int num=1)

  Pack one or more **unsigned long's**.

- void pack (const short ∗data, const int num=1)

  Pack one or more **short's**.

- void pack (const u_short ∗data, const int num=1)

  Pack one or more **unsigned short's**.

- void pack (const char ∗data, const int num=1)

  Pack one or more **char's**.

- void pack (const u_char *data, const int num=1)

  Pack one or more **unsigned char's**.

- void pack (const double *data, const int num=1)

  Pack one or more **double's**.

- void pack (const float *data, const int num=1)

  Pack one or more **float's**.

- void pack (const bool *data, const int num=1)

  Pack one or more **bool's**.

- void pack (const int &data)

  Pack a **int**.

- void pack (const u_int &data)

  Pack a **unsigned int**.

- void pack (const long &data)

  Pack a **long**.

- void pack (const u_long &data)

  Pack a **unsigned long**.

- void pack (const short &data)

  Pack a **short**.

- void pack (const u_short &data)

  Pack a **unsigned short**.

- void pack (const char &data)

  Pack a **char**.

- void pack (const u_char &data)

  Pack a **unsigned char**.

- void pack (const double &data)

  Pack a **double**.

- void pack (const float &data)

  Pack a **float**.

- void pack (const bool &data)

  Pack a **bool**.

Protected Member Functions

- void resize (const int newsize)

  Resizes the internal buffer.

Protected Attributes

- char * Buffer

  The internal buffer for packing.

- int Index

  The index into the current buffer.

- int Size

  The total size that has been allocated for the buffer.

8.62.1 Detailed Description

Class for packing MPI message buffers.

A class that provides a facility for packing message buffers using the MPI_Pack facility. The `MPIPackBuffer` class dynamically resizes the internal buffer to contain enough memory to pack the entire object. When deleted, the `MPIPackBuffer` object deletes this internal buffer. This class is based on the Dakota_Version_3_0 version of utilib::PackBuffer from utilib/src/io/PackBuf.[cpp,h]

The documentation for this class was generated from the following files:

- MPIPackBuffer.H
- MPIPackBuffer.C

8.63 MPIUnpackBuffer Class Reference

Class for unpacking MPI message buffers.

Public Member Functions

- void setup (char *buf_, int size_, bool flag_=false)

  Method that does the setup for the constructors.

- MPIUnpackBuffer ()

  Default constructor.

- MPIUnpackBuffer (int size_)

  Constructor that specifies the size of the buffer.

- MPIUnpackBuffer (char *buf_, int size_, bool flag_=false)

  Constructor that sets the internal buffer to the given array.

- ~MPIUnpackBuffer ()

  Destructor.

- void resize (const int newsize)

  Resizes the internal buffer.

- const char * buf ()

  Returns a pointer to the internal buffer.

- int size ()

  Returns the length of the buffer.

- int curr ()

  Returns the number of bytes that have been unpacked from the buffer.

- void reset ()

  Resets the index of the internal buffer.

- void unpack (int *data, const int num=1)

  Unpack one or more **int's**.

- void unpack (u_int *data, const int num=1)

  Unpack one or more **unsigned int's**.

- void unpack (long *data, const int num=1)

  Unpack one or more **long's**.

- void unpack (u_long *data, const int num=1)

  Unpack one or more **unsigned long's**.

- void unpack (short *data, const int num=1)

  Unpack one or more **short's**.

- void unpack (u_short *data, const int num=1)

  Unpack one or more **unsigned short's**.

- void unpack (char *data, const int num=1)

  Unpack one or more **char's**.

- void unpack (u_char *data, const int num=1)

  Unpack one or more **unsigned char's**.

- void unpack (double *data, const int num=1)

  Unpack one or more **double's**.

- void unpack (float *data, const int num=1)

  Unpack one or more **float's**.

- void unpack (bool *data, const int num=1)

  Unpack one or more **bool's**.

- void unpack (int &data)

  Unpack a **int**.

- void unpack (u_int &data)

  Unpack a **unsigned int**.

- void unpack (long &data)

  Unpack a **long**.

- void unpack (u_long &data)

  Unpack a **unsigned long**.

- void unpack (short &data)

  Unpack a **short**.

- void unpack (u_short &data)

  Unpack a **unsigned short**.

- void unpack (char &data)

  Unpack a **char**.

- void unpack (u_char &data)

Unpack a **unsigned char**.

- void unpack (double &data)

  Unpack a **double**.

- void unpack (float &data)

  Unpack a **float**.

- void unpack (bool &data)

  Unpack a **bool**.

Protected Attributes

- char * Buffer

  The internal buffer for unpacking.

- int Index

  The index into the current buffer.

- int Size

  The total size that has been allocated for the buffer.

- bool ownFlag

  If `TRUE`*, then this class owns the internal buffer.*

8.63.1 Detailed Description

Class for unpacking MPI message buffers.

A class that provides a facility for unpacking message buffers using the MPI_Unpack facility. This class is based on the Dakota_Version_3_0 version of utilib::UnPackBuffer from utilib/src/io/PackBuf.[cpp,h]

The documentation for this class was generated from the following files:

- MPIPackBuffer.H
- MPIPackBuffer.C

8.64 NCSUOptimizer Class Reference

Wrapper class for the NCSU DIRECT optimization library.

Inheritance diagram for NCSUOptimizer::



Public Member Functions

- NCSUOptimizer (Model &model)

  standard constructor

- NCSUOptimizer (Model &model, const int &max_iter, const int &max_eval, double min_box_size=-1., double vol_box_size=-1., double solution_target=-DBL_MAX)

  alternate constructor for instantiations "on the fly"

- NCSUOptimizer (NoDBBaseConstructor, Model &model)

  alternate constructor for Iterator instantiations by name

- NCSUOptimizer (const RealVector &var_l_bnds, const RealVector &var_u_bnds, const int &max_iter, const int &max_eval, double(∗user_obj_eval)(const RealVector &x), double min_box_size=-1., double vol_box_size=-1., double solution_target=-DBL_MAX)

  alternate constructor for instantiations "on the fly"

- ∼NCSUOptimizer ()

  destructor

- void find_optimum ()

  Redefines the run virtual function for the optimizer branch.

Private Member Functions

- void initialize ()

  shared code among model-based constructors

- void check_inputs ()

  verify problem respects NCSU DIRECT Fortran limits

Static Private Member Functions

- static int objective_eval (int ∗n, double c[ ], double l[ ], double u[ ], int point[ ], int ∗maxI, int ∗start, int ∗maxfunc, double fvec[ ], int iidata[ ], int ∗iisize, double ddata[ ], int ∗idsize, char cdata[ ], int ∗icsize)

  DIRECT src (DIRbatch.f).

Private Attributes

- short setUpType

  GaussProcApproximation currently uses the user_functions mode.

- Real minBoxSize

  holds the minimum boxsize

- Real volBoxSize

  hold the minimum volume boxsize

- Real solutionTarget

  holds the solution target minimum to drive towards

- RealVector lowerBounds

  holds variable lower bounds passed in for "user_functions" mode.

- RealVector upperBounds

  holds variable upper bounds passed in for "user_functions" mode.

- double(∗ userObjectiveEval)(const RealVector &x)

  "user_functions" mode.

Static Private Attributes

- static NCSUOptimizer ∗ ncsudirectInstance

  functions in order to avoid the need for static data

8.64.1 Detailed Description

Wrapper class for the NCSU DIRECT optimization library.

The NCSUOptimizer class provides a wrapper for a Fortran 77 implementation of the DIRECT algorithm developed at North Carolina State University. It uses a function pointer approach for which passed functions must be either global functions or static member functions. Any attribute used within static member functions must be either local to that function or accessed through a static pointer.

The user input mappings are as follows:

8.64.2 Constructor & Destructor Documentation

8.64.2.1 NCSUOptimizer (Model & *model*)

standard constructor

This is the standard constructor with method specification support.

8.64.2.2 NCSUOptimizer (Model & *model*, const int & *max_iter*, const int & *max_eval*, double *min_box_size* = `-1.`, double *vol_box_size* = `-1.`, double *solution_target* = `-DBL_MAX`)

alternate constructor for instantiations "on the fly"

This is an alternate constructor for instantiations on the fly using a Model but no ProblemDescDB.

8.64.2.3 NCSUOptimizer (NoDBBaseConstructor, Model & *model*)

alternate constructor for Iterator instantiations by name

This is an alternate constructor for Iterator instantiations by name using a Model but no ProblemDescDB.

8.64.2.4 NCSUOptimizer (const RealVector & *var_l_bnds*, const RealVector & *var_u_bnds*, const int & *max_iter*, const int & *max_eval*, double(*)(const RealVector &x) *user_obj_eval*, double *min_box_size* = `-1.`, double *vol_box_size* = `-1.`, double *solution_target* = `-DBL_MAX`)

alternate constructor for instantiations "on the fly"

This is an alternate constructor for performing an optimization using the passed in objective function pointer.

The documentation for this class was generated from the following files:

- NCSUOptimizer.H
- NCSUOptimizer.C

8.65 NestedModel Class Reference

execution within every evaluation of the model.

Inheritance diagram for NestedModel::



Public Member Functions

- NestedModel (ProblemDescDB &problem_db)

  constructor

- ~NestedModel ()

  destructor

Protected Member Functions

- void derived_compute_response (const ActiveSet &set)

  portion of compute_response() specific to NestedModel

- void derived_asynch_compute_response (const ActiveSet &set)

  portion of asynch_compute_response() specific to NestedModel

- Iterator & subordinate_iterator ()

  return subIterator

- Model & subordinate_model ()

  return subModel

- void derived_subordinate_models (ModelList &ml, bool recurse_flag)

  return subModel

- Interface & interface ()

  return optionalInterface

- void surrogate_bypass (bool bypass_flag)

  to the subModel for any lower-level surrogates.

- void component_parallel_mode (short mode)

optionalInterface and subModel

- bool derived_master_overload () const

  evaluation (forwarded to optionalInterface)

- void derived_init_communicators (const int &max_iterator_concurrency, bool recurse_flag=true)

  set up optionalInterface and subModel for parallel operations

- void derived_init_serial ()

  set up optionalInterface and subModel for serial operations.

- void derived_set_communicators (const int &max_iterator_concurrency, bool recurse_flag=true)

  set active parallel configuration within subModel

- void derived_free_communicators (const int &max_iterator_concurrency, bool recurse_flag=true)

  (forwarded to optionalInterface and subModel)

- void serve ()

  stop_servers().

- void stop_servers ()

  optionalInterface when iteration on the NestedModel is complete.

- const String & interface_id () const

  return the optionalInterface identifier

- int evaluation_id () const

  Return the current evaluation id for the NestedModel.

- void set_evaluation_reference ()

  (request forwarded to optionalInterface and subModel)

- void fine_grained_evaluation_counters ()

  and subModel

- void print_evaluation_summary (std::ostream &s, bool minimal_header=false, bool relative_count=true) const

  (request forwarded to optionalInterface and subModel)

Private Member Functions

- void resolve_real_variable_mapping (const String &map1, const String &map2, size_t curr_index, short &inactive_sm_view)

  for a named real mapping, resolve primary index and secondary target

- void resolve_integer_variable_mapping (const String &map1, const String &map2, size_t curr_index, short &inactive_sm_view)

  for a named integer mapping, resolve primary index and secondary target

- size_t sm_acv_index_map (size_t pacvm_index, short sacvm_target)

  offset pacvm_index based on sacvm_target to create mapped_index

- size_t sm_adiv_index_map (size_t padivm_index, short sadivm_target)

  offset padivm_index based on sadivm_target to create mapped_index

- size_t sm_adrv_index_map (size_t padrvm_index, short sadrvm_target)

  offset padrvm_index based on sadrvm_target to create mapped_index

- size_t cv_index_map (size_t cv_index)

  offset cv_index to create index into aggregated primary/secondary arrays

- size_t div_index_map (size_t div_index)

  offset div_index to create index into aggregated primary/secondary arrays

- size_t drv_index_map (size_t drv_index)

  offset drv_index to create index into aggregated primary/secondary arrays

- size_t ccv_index_map (size_t ccv_index)

  continuous arrays

- size_t cdiv_index_map (size_t cdiv_index)

  discrete int arrays

- size_t cdrv_index_map (size_t cdrv_index)

  discrete real arrays

- void real_variable_mapping (const Real &r_var, size_t mapped_index, short svm_target)

  insert r_var into appropriate recipient

- void integer_variable_mapping (const int &i_var, size_t mapped_index, short svm_target)

  insert i_var into appropriate recipient

- void set_mapping (const ActiveSet &mapped_set, ActiveSet &interface_set, bool &opt_interface_map, ActiveSet &sub_iterator_set, bool &sub_iterator_map)

  total model evaluation requirements (mapped_set)

- void response_mapping (const Response &interface_response, const Response &sub_iterator_response, Response &mapped_response)

  mappings to create the total response for the model

- void update_inactive_view (short new_view, short &view)

update inactive variables view for subIterator based on new_view

- void update_inactive_view (unsigned short type, short &view)

  update inactive variables view for subIterator based on type

- void update_sub_model ()

  update subModel with current variable values/bounds/labels

Private Attributes

- int nestedModelEvals

  derived_asynch_compute_response()

- Iterator subIterator

  the sub-iterator that is executed on every evaluation of this model

- Model subModel

  the sub-model used in sub-iterator evaluations

- size_t numSubIterFns

  number of sub-iterator response functions prior to mapping

- size_t numSubIterMappedIneqCon

  sub-iteration results

- size_t numSubIterMappedEqCon

  sub-iteration results

- Interface optionalInterface

  the total model response

- String optInterfacePointer

  the optional interface pointer from the nested model specification

- Response optInterfaceResponse

  the response object resulting from optional interface evaluations

- size_t numOptInterfPrimary

  functions) resulting from optional interface evaluations

- size_t numOptInterfIneqCon

  interface evaluations

- size_t numOptInterfEqCon

  interface evaluations

- SizetArray active1ACVarMapIndices

  replace the subModel variable values.

- SizetArray active1ADIVarMapIndices

  insertions replace the subModel variable values.

- SizetArray active1ADRVarMapIndices

  insertions replace the subModel variable values.

- ShortArray active2ACVarMapTargets

  variables) within all continuous subModel variables.

- ShortArray active2ADIVarMapTargets

  design/state variables) within all discrete int subModel variables.

- ShortArray active2ADRVarMapTargets

  design/state variables) within all discrete real subModel variables.

- SizetArray complement1ACVarMapIndices

  continuous currentVariables within all continuous subModel variables

- SizetArray complement1ADIVarMapIndices

  discrete int currentVariables within all discrete int subModel variables

- SizetArray complement1ADRVarMapIndices

  discrete real currentVariables within all discrete real subModel variables

- BoolDeque extraCVarsData

  for each active continuous variable in currentVariables

- BoolDeque extraDIVarsData

  for each active discrete int variable in currentVariables

- BoolDeque extraDRVarsData

  for each active discrete real variable in currentVariables

- RealMatrix primaryRespCoeffs

  generic response terms.

- RealMatrix secondaryRespCoeffs

  contributions to the top-level inequality and equality constraints.

8.65.1 Detailed Description

execution within every evaluation of the model.

The NestedModel class nests a sub-iterator execution within every model evaluation. This capability is most commonly used for optimization under uncertainty, in which a nondeterministic iterator is executed on every optimization function evaluation. The NestedModel also contains an optional interface, for portions of the model evaluation which are independent from the sub-iterator, and a set of mappings for combining sub-iterator and optional interface data into a top level response for the model.

8.65.2 Member Function Documentation

8.65.2.1 void derived_compute_response (const ActiveSet & *set*) [protected, virtual]

portion of compute_response() specific to NestedModel

Update subModel's inactive variables with active variables from currentVariables, compute the optional interface and sub-iterator responses, and map these to the total model response.

Reimplemented from Model.

8.65.2.2 void derived_asynch_compute_response (const ActiveSet & *set*) [protected, virtual]

portion of asynch_compute_response() specific to NestedModel

Not currently supported by NestedModels (need to add concurrent iterator support). As a result, derived_synchronize() and derived_synchronize_nowait() are inactive as well).

Reimplemented from Model.

8.65.2.3 bool derived_master_overload () const [inline, protected, virtual]

evaluation (forwarded to optionalInterface)

Derived master overload for subModel is handled separately in subModel.compute_response() within subIterator.run().

Reimplemented from Model.

8.65.2.4 void derived_init_communicators (const int & *max_iterator_concurrency*, bool *recurse_flag* = true) [inline, protected, virtual]

set up optionalInterface and subModel for parallel operations

Asynchronous flags need to be initialized for the subModel. In addition, max_iterator_concurrency is the outer level iterator concurrency, not the subIterator concurrency that subModel will see, and recomputing the message_lengths on the subModel is probably not a bad idea either. Therefore, recompute everything on subModel using init_communicators().

Reimplemented from Model.

8.65.2.5 int evaluation_id () const [inline, protected, virtual]

Return the current evaluation id for the NestedModel.

return the top level nested evaluation count. To get the lower level eval count, the subModel must be explicitly queried. This is consistent with the eval counter definitions in surrogate models.

Reimplemented from Model.

8.65.2.6 size_t cv_index_map (size_t *cv_index*) [private]

offset cv_index to create index into aggregated primary/secondary arrays

maps index within active continuous variables to index within aggregated active continuous/discrete-int/discrete-real variables.

8.65.2.7 size_t div_index_map (size_t *div_index*) [private]

offset div_index to create index into aggregated primary/secondary arrays

maps index within active discrete int variables to index within aggregated active continuous/discrete-int/discrete-real variables.

8.65.2.8 size_t drv_index_map (size_t *drv_index*) [private]

offset drv_index to create index into aggregated primary/secondary arrays

maps index within active discrete real variables to index within aggregated active continuous/discrete-int/discrete-real variables.

8.65.2.9 size_t ccv_index_map (size_t *ccv_index*) [private]

continuous arrays

maps index within complement of active continuous variables to index within all continuous variables.

8.65.2.10 size_t cdiv_index_map (size_t *cdiv_index*) [private]

discrete int arrays

maps index within complement of active discrete int variables to index within all discrete int variables.

8.65.2.11 size_t cdrv_index_map (size_t *cdrv_index*) [private]

discrete real arrays

maps index within complement of active discrete real variables to index within all discrete real variables.

8.65.2.12 void response_mapping (const Response & *opt_interface_response*, const Response & *sub_iterator_response*, Response & *mapped_response*) [private]

mappings to create the total response for the model

In the OUU case,

```
optionalInterface fns = {f}, {g} (deterministic primary functions, constraints)
subIterator fns       = {S}      (UQ response statistics)

Problem formulation for mapped functions:
                  minimize    {f} + [W]{S}
                  subject to  {g_l} <= {g}    <= {g_u}
                              {a_l} <= [A]{S} <= {a_u}
                              {g}    == {g_t}
                              [A]{S} == {a_t}
```

where [W] is the primary_mapping_matrix user input (primaryRespCoeffs class attribute), [A] is the secondary_-mapping_matrix user input (secondaryRespCoeffs class attribute), {{g_l},{a_l}} are the top level inequality constraint lower bounds, {{g_u},{a_u}} are the top level inequality constraint upper bounds, and {{g_t},{a_t}} are the top level equality constraint targets.

NOTE: optionalInterface/subIterator primary fns (obj/lsq/generic fns) overlap but optionalInterface/subIterator secondary fns (ineq/eq constraints) do not. The [W] matrix can be specified so as to allow

- some purely deterministic primary functions and some combined: [W] filled and [W].num_rows() < {f}.length() [combined first] *or* [W].num_rows() == {f}.length() and [W] contains rows of zeros [combined last]
- some combined and some purely stochastic primary functions: [W] filled and [W].num_rows() > {f}.length()
- separate deterministic and stochastic primary functions: [W].num_rows() > {f}.length() and [W] contains {f}.length() rows of zeros.

If the need arises, could change constraint definition to allow overlap as well: {g_l} <= {g} + [A]{S} <= {g_u} with [A] usage the same as for [W] above.

In the UOO case, things are simpler, just compute statistics of each optimization response function: [W] = [I], {f}/{g}/[A] are empty.

8.65.3 Member Data Documentation

8.65.3.1 Model subModel [private]

the sub-model used in sub-iterator evaluations

There are no restrictions on subModel, so arbitrary nestings are possible. This is commonly used to support surrogate-based optimization under uncertainty by having NestedModels contain SurrogateModels and vice versa.

The documentation for this class was generated from the following files:

- NestedModel.H
- NestedModel.C

8.66 NIDRProblemDescDB Class Reference

The derived input file database utilizing the new IDR parser.

Inheritance diagram for NIDRProblemDescDB::



Public Member Functions

- NIDRProblemDescDB (ParallelLibrary &parallel_lib)

  constructor

- ~NIDRProblemDescDB ()

  destructor

- void derived_parse_inputs (const char *dakota_input_file, const char *parser_options)

  database using NIDR.

- void derived_broadcast ()

  and after receiving the DB buffer on other processor ranks)

- void derived_post_process ()

  perform any additional data post-processing

- **KWH** (iface_Rlit)
- **KWH** (iface_false)
- **KWH** (iface_ilit)
- **KWH** (iface_pint)
- **KWH** (iface_lit)
- **KWH** (iface_start)
- **KWH** (iface_stop)
- **KWH** (iface_str)
- **KWH** (iface_str2D)
- **KWH** (iface_strL)
- **KWH** (iface_true)
- **KWH** (method_Ii)
- **KWH** (method_Real)
- **KWH** (method_Real01)
- **KWH** (method_RealDL)
- **KWH** (method_RealLlit)
- **KWH** (method_Realp)

- **KWH** (method_Realz)
- **KWH** (method_Ri)
- **KWH** (method_coliny_ea)
- **KWH** (method_false)
- **KWH** (method_ilit2)
- **KWH** (method_ilit2p)
- **KWH** (method_int)
- **KWH** (method_intDL)
- **KWH** (method_lit)
- **KWH** (method_lit2)
- **KWH** (method_litc)
- **KWH** (method_liti)
- **KWH** (method_litp)
- **KWH** (method_litpp)
- **KWH** (method_litpp_final)
- **KWH** (method_litr)
- **KWH** (method_litz)
- **KWH** (method_meritFn)
- **KWH** (method_moga_begin)
- **KWH** (method_moga_final)
- **KWH** (method_nnint)
- **KWH** (method_nnintz)
- **KWH** (method_num_resplevs)
- **KWH** (method_pint)
- **KWH** (method_pintz)
- **KWH** (method_resplevs)
- **KWH** (method_resplevs01)
- **KWH** (method_shint)
- **KWH** (method_slit)
- **KWH** (method_slit2)
- **KWH** (method_soga_begin)
- **KWH** (method_soga_final)
- **KWH** (method_start)
- **KWH** (method_stop)
- **KWH** (method_str)
- **KWH** (method_strL)
- **KWH** (method_true)
- **KWH** (method_tr_final)
- **KWH** (method_type)
- **KWH** (method_ushint)
- **KWH** (method_ushintL)
- **KWH** (model_Real)
- **KWH** (model_RealDL)
- **KWH** (model_int)
- **KWH** (model_intset)
- **KWH** (model_lit)

- **KWH** (model_order)
- **KWH** (model_shint)
- **KWH** (model_slit2)
- **KWH** (model_start)
- **KWH** (model_stop)
- **KWH** (model_str)
- **KWH** (model_strL)
- **KWH** (model_true)
- **KWH** (resp_RealDL)
- **KWH** (resp_RealL)
- **KWH** (resp_false)
- **KWH** (resp_intL)
- **KWH** (resp_lit)
- **KWH** (resp_nnintz)
- **KWH** (resp_start)
- **KWH** (resp_stop)
- **KWH** (resp_str)
- **KWH** (resp_strL)
- **KWH** (resp_true)
- **KWH** (strategy_Real)
- **KWH** (strategy_RealL)
- **KWH** (strategy_int)
- **KWH** (strategy_lit)
- **KWH** (strategy_slit)
- **KWH** (strategy_start)
- **KWH** (strategy_str)
- **KWH** (strategy_strL)
- **KWH** (strategy_true)
- **KWH** (var_RealLb)
- **KWH** (var_RealLd)
- **KWH** (var_RealUb)
- **KWH** (var_caulbl)
- **KWH** (var_ceulbl)
- **KWH** (var_dailbl)
- **KWH** (var_darlbl)
- **KWH** (var_intDL)
- **KWH** (var_intL)
- **KWH** (var_intz)
- **KWH** (var_start)
- **KWH** (var_stop)
- **KWH** (var_str)
- **KWH** (var_strL)
- **KWH** (var_true)
- **KWH** (var_vil)
- **KWH** (var_vrl)

Static Public Member Functions

- static void **Var_boundchk** (DataVariablesRep ∗)
- static void **Var_boundgen** (DataVariablesRep ∗)
- static void **Var_iboundchk** (DataVariablesRep ∗)
- static void **Var_iboundgen** (DataVariablesRep ∗)
- static void **botch** (const char ∗fmt,...)
- static void **check_variables** (std::list< DataVariables > ∗)
- static void **check_responses** (std::list< DataResponses > ∗)
- static void **make_variable_defaults** (std::list< DataVariables > ∗)
- static void **make_response_defaults** (std::list< DataResponses > ∗)
- static void **squawk** (const char ∗fmt,...)
- static void **warn** (const char ∗fmt,...)

Static Public Attributes

- static NIDRProblemDescDB ∗ pDDBInstance

  functions in order to avoid the need for static data

- static int **nerr**

Static Private Member Functions

- static void **var_stop1** (void ∗)

Private Attributes

- std::list< void ∗ > **VIL**

8.66.1 Detailed Description

The derived input file database utilizing the new IDR parser.

The NIDRProblemDescDB class is derived from ProblemDescDB for use by the NIDR parser in processing DAKOTA input file data. For information on modifying the NIDR input parsing procedures, refer to Dakota/docs/Dev_Spec_Change.dox. For more on the parsing technology, see "Specifying and Reading Program Input with NIDR" by David M. Gay (report SAND2008-2261P, which is available in PDF form as `http://www.sandia.gov/~dmgay/nidr08.pdf`). Source for the routines declared herein is NIDRProblemDescDB.C, in which most routines are so short that a description seems unnecessary.

8.66.2 Member Function Documentation

8.66.2.1 void derived_parse_inputs (const char ∗ *dakota_input_file*, const char ∗ *parser_options*) [virtual]

database using NIDR.

Parse the input file using the Input Deck Reader (IDR) parsing system. IDR populates the IDRProblemDescDB object with the input file data.

Reimplemented from ProblemDescDB.

The documentation for this class was generated from the following files:

- NIDRProblemDescDB.H
- NIDRProblemDescDB.C

8.67 NL2Res Struct Reference

Auxiliary information passed to calcr and calcj via ur.

Public Attributes

- Real * r

  residual r = r(x)

- Real * J

  Jacobian J = J(x).

- Real * x

  corresponding parameter vector

- int nf

  function invocation count for r(x)

8.67.1 Detailed Description

Auxiliary information passed to calcr and calcj via ur.

The documentation for this struct was generated from the following file:

- NL2SOLLeastSq.C

8.68 NL2SOLLeastSq Class Reference

Wrapper class for the NL2SOL nonlinear least squares library.

Inheritance diagram for NL2SOLLeastSq::



Public Member Functions

- NL2SOLLeastSq (Model &model)

  standard constructor

- NL2SOLLeastSq (NoDBBaseConstructor, Model &model)

  alternate constructor

- ~NL2SOLLeastSq ()

  destructor

- void minimize_residuals ()

  for the least squares branch.

Static Private Member Functions

- static void calcr (int *np, int *pp, Real *x, int *nfp, Real *r, int *ui, void *ur, Vf vf)

  evaluator function for residual vector

- static void calcj (int *np, int *pp, Real *x, int *nfp, Real *J, int *ui, void *ur, Vf vf)

  evaluator function for residual Jacobian

Private Attributes

- int auxprt

auxilary printing bits (see Dakota Ref Manual): sum of 1 = x0prt (print initial guess) 2 = solprt (print final solution) 4 = statpr (print solution statistics) 8 = parprt (print nondefault parameters) 16 = dradpr (print bound constraint drops/adds) debug/verbose/normal use default = 31 (everything), quiet uses 3, silent uses 0.

- int outlev

  frequency of output summary lines in number of iterations (debug/verbose/normal/quiet use default = 1, silent uses 0)

- Real dltfdj

  finite-diff step size for computing Jacobian approximation (`fd_gradient_step_size`*)*

- Real delta0

  finite-diff step size for gradient differences for H (a component of some covariance approximations, if desired) (`fd_hessian_step_size`*)*

- Real dltfdc

  finite-diff step size for function differences for H (`fd_hessian_step_size`*)*

- int mxfcal

  function-evaluation limit (`max_function_evaluations`*)*

- int mxiter

  iteration limit (`max_iterations`*)*

- Real rfctol

  relative fn convergence tolerance (`convergence_tolerance`*)*

- Real afctol

  absolute fn convergence tolerance (`absolute_conv_tol`*)*

- Real xctol

  x-convergence tolerance (`x_conv_tol`*)*

- Real sctol

  singular convergence tolerance (`singular_conv_tol`*)*

- Real lmaxs

  radius for singular-convergence test (`singular_radius`*)*

- Real xftol

  false-convergence tolerance (`false_conv_tol`*)*

- int covreq

  kind of covariance required (`covariance`*): 1 or -1 ==> sigma^2 H^-1 J^T J H^-1 2 or -2 ==> sigma^2 H^-1 3 or -3 ==> sigma^2 (J^T J)^-1 1 or 2 ==> use gradient diffs to estimate H -1 or -2 ==> use function diffs to estimate H default = 0 (no covariance)*

- int rdreq

  whether to compute the regression diagnostic vector (`regression_diagnostics`*)*

- Real fprec

  expected response function precision (`function_precision`*)*

- Real lmax0

  initial trust-region radius (`initial_trust_radius`*)*

Static Private Attributes

- static NL2SOLLeastSq ∗ nl2solInstance

  evaluator functions

8.68.1 Detailed Description

Wrapper class for the NL2SOL nonlinear least squares library.

The NL2SOLLeastSq class provides a wrapper for NL2SOL (TOMS Algorithm 573), in the updated form of Port Library routines dn[fg][b] from Bell Labs; see http://www.netlib.org/port/readme. The Fortran from Port has been turned into C by f2c. NL2SOL uses a function pointer approach for which passed functions must be either global functions or static member functions.

The documentation for this class was generated from the following files:

- NL2SOLLeastSq.H
- NL2SOLLeastSq.C

8.69 NLPQLPOptimizer Class Reference

Wrapper class for the NLPQLP optimization library, Version 2.0.

Inheritance diagram for NLPQLPOptimizer::



Public Member Functions

- NLPQLPOptimizer (Model &model)

  standard constructor

- NLPQLPOptimizer (NoDBBaseConstructor, Model &model)

  alternate constructor

- ~NLPQLPOptimizer ()

  destructor

- void find_optimum ()

  Redefines the run virtual function for the optimizer branch.

Protected Member Functions

- void initialize_run ()

  performs run-time set up

Private Member Functions

- void initialize ()

  Shared constructor code.

- void allocate_workspace ()

  Allocates workspace for the optimizer.

- void deallocate_workspace ()

  Releases workspace memory.

- void allocate_constraints ()

  Allocates constraint mappings.

Private Attributes

- int L

  the serial version by setting L=1.

- int numEqConstraints

  numEqConstraints : Number of equality constraints.

- int MMAX

  MMAX must be at least one and greater or equal to M.

- int N

  N : Number of optimization variables.

- int NMAX

  than N.

- int MNN2

  MNN2 : Must be equal to M+N+N+2.

- double * X

  function values should be computed simultaneously.

- double * F

  values to be computed from L iterates stored in X.

- double * G

  function values to be computed from L iterates stored in X.

- double * DF

  of F to compute DF.

- double * DG

  has to be equal to MMAX.

- double * U

  inequality constraints should be nonnegative.

- double * C

  to NMAX.

- double * D

  array D.

- double ACC

  than the accuracy by which gradients are computed.

- double ACCQP

  by NLPQLP and subsequently multiplied by 1.0D+4.

- double STPMIN

  *by STPMIN**(1/L-1). If STPMIN<=0, then STPMIN=ACC is used.*

- int MAXFUN

  than 50.

- int MAXIT

  gradients (e.g. 100).

- int MAX_NM

  MAX_NM=0, monotone line search is performed.

- double TOL_NM

  non-negative (e.g. 0.1).

- int IPRINT

  values are displayed during the line search.

- int MODE

  function in C and D in form of an LDL decomposition.

- int IOUT

  write-statements start with 'WRITE(IOUT,... '.

- int IFAIL

  constraint.

- double * WA

  WA(LWA) : WA is a real working array of length LWA.

- int LWA

  LWA : LWA value extracted from NLPQLP20.f.

- int * KWA

KWA(LKWA) : The user has to provide working space for an integer array.

- int LKWA

  LKWA : LKWA should be at least N+10.

- int * ACTIVE

  ACTIVE(J)=.TRUE., J=1,...,M.

- int LACTIVE

  *least 2*M+10.*

- int LQL

  contains only an upper triangular factor.

- int numNlpqlConstr

  total number of constraints seen by NLPQL

- SizetList nonlinIneqConMappingIndices

  constraints used in computing the corresponding NLPQL constraints.

- RealList nonlinIneqConMappingMultipliers

  constraints to the corresponding NLPQL constraints.

- RealList nonlinIneqConMappingOffsets

  constraints to the corresponding NLPQL constraints.

- SizetList linIneqConMappingIndices

  constraints used in computing the corresponding NLPQL constraints.

- RealList linIneqConMappingMultipliers

  constraints to the corresponding NLPQL constraints.

- RealList linIneqConMappingOffsets

  constraints to the corresponding NLPQL constraints.

8.69.1 Detailed Description

Wrapper class for the NLPQLP optimization library, Version 2.0.

****

AN IMPLEMENTATION OF A SEQUENTIAL QUADRATIC PROGRAMMING METHOD FOR SOLVING NONLINEAR OPTIMIZATION PROBLEMS BY DISTRIBUTED COMPUTING AND NON-MONOTONE LINE SEARCH

This subroutine solves the general nonlinear programming problem

minimize F(X) subject to G(J,X) = 0 , J=1,...,ME G(J,X) >= 0 , J=ME+1,...,M XL <= X <= XU

and is an extension of the code NLPQLD. NLPQLP is specifically tuned to run under distributed systems. A new input parameter L is introduced for the number of parallel computers, that is the number of function calls to be executed simultaneously. In case of L=1, NLPQLP is identical to NLPQLD. Otherwise the line search is modified to allow L parallel function calls in advance. Moreover the user has the opportunity to used distributed function calls for evaluating gradients.

The algorithm is a modification of the method of Wilson, Han, and Powell. In each iteration step, a linearly constrained quadratic programming problem is formulated by approximating the Lagrangian function quadratically and by linearizing the constraints. Subsequently, a one-dimensional line search is performed with respect to an augmented Lagrangian merit function to obtain a new iterate. Also the modified line search algorithm guarantees convergence under the same assumptions as before.

For the new version, a non-monotone line search is implemented which allows to increase the merit function in case of instabilities, for example caused by round-off errors, errors in gradient approximations, etc.

The subroutine contains the option to predetermine initial guesses for the multipliers or the Hessian of the Lagrangian function and is called by reverse communication.

The documentation for this class was generated from the following files:

- NLPQLPOptimizer.H
- NLPQLPOptimizer.C

8.70 NLSSOLLeastSq Class Reference

Wrapper class for the NLSSOL nonlinear least squares library.

Inheritance diagram for NLSSOLLeastSq::

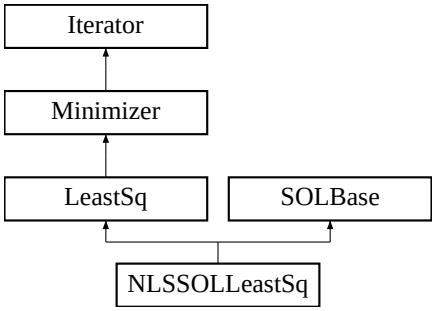

Public Member Functions

- NLSSOLLeastSq (Model &model)

  standard constructor

- NLSSOLLeastSq (NoDBBaseConstructor, Model &model)

  alternate constructor

- ~NLSSOLLeastSq ()

  destructor

- void minimize_residuals ()

  for the least squares branch.

Static Private Member Functions

- static void least_sq_eval (int &mode, int &m, int &n, int &nrowfj, double *x, double *f, double *gradf, int &nstate)

  least squares terms (passed by function pointer to NLSSOL).

Static Private Attributes

- static NLSSOLLeastSq * nlssolInstance

  functions in order to avoid the need for static data

8.70.1 Detailed Description

Wrapper class for the NLSSOL nonlinear least squares library.

The NLSSOLLeastSq class provides a wrapper for NLSSOL, a Fortran 77 sequential quadratic programming library from Stanford University marketed by Stanford Business Associates. It uses a function pointer approach for which passed functions must be either global functions or static member functions. Any nonstatic attribute used within static member functions must be either local to that function or accessed through a static pointer.

The user input mappings are as follows: `max_function_evaluations` is implemented directly in NLSSOLLeastSq's evaluator functions since there is no NLSSOL parameter equivalent, and `max_iterations`, `convergence_tolerance`, `output` verbosity, `verify_level`, `function_precision`, and `linesearch_tolerance` are mapped into NLSSOL's "Major Iteration Limit", "Optimality Tolerance", "Major Print Level" (`verbose`: Major Print Level = 20; `quiet`: Major Print Level = 10), "Verify Level", "Function Precision", and "Linesearch Tolerance" parameters, respectively, using NLSSOL's npoptn() subroutine (as wrapped by npoptn2() from the npoptn_wrapper.f file). Refer to [Gill, P.E., Murray, W., Saunders, M.A., and Wright, M.H., 1986] for information on NLSSOL's optional input parameters and the npoptn() subroutine.

8.70.2 Constructor & Destructor Documentation

8.70.2.1 NLSSOLLeastSq (Model & *model*)

standard constructor

This is the primary constructor. It accepts a Model reference.

8.70.2.2 NLSSOLLeastSq (NoDBBaseConstructor, Model & *model*)

alternate constructor

This is an alternate constructor which accepts a Model but does not have a supporting method specification from the ProblemDescDB.

The documentation for this class was generated from the following files:

- NLSSOLLeastSq.H
- NLSSOLLeastSq.C

8.71 NoDBBaseConstructor Struct Reference

Dummy struct for overloading constructors used in on-the-fly instantiations.

Public Member Functions

- NoDBBaseConstructor (int=0)

  C++ structs can have constructors.

8.71.1 Detailed Description

Dummy struct for overloading constructors used in on-the-fly instantiations.

NoDBBaseConstructor is used to overload the constructor used for on-the-fly instantiations in which ProblemDescDB queries cannot be used. Putting this struct here avoids circular dependencies.

The documentation for this struct was generated from the following file:

- global_defs.h

8.72 NonD Class Reference

Base class for all nondetermistic iterators (the DAKOTA/UQ branch).

Inheritance diagram for NonD::

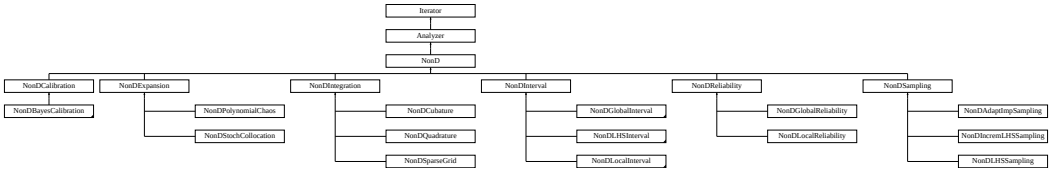

Public Member Functions

- void initialize_random_variables (short u_space_type)

  initialize natafTransform based on distribution data from iteratedModel

- void initialize_random_variables (const Pecos::ProbabilityTransformation &transform)

  alternate form: initialize natafTransform based on incoming data

- void requested_levels (const RealVectorArray &req_resp_levels, const RealVectorArray &req_prob_levels, const RealVectorArray &req_rel_levels, const RealVectorArray &req_gen_rel_levels, short resp_lev_-target, bool cdf_flag)

  combination with alternate ctors)

- void distribution_parameter_derivatives (bool dist_param_derivs)

  set distParamDerivs

Protected Member Functions

- NonD (Model &model)

  constructor

- NonD (NoDBBaseConstructor, Model &model)

  alternate constructor for sample generation and evaluation "on the fly"

- NonD (NoDBBaseConstructor, const RealVector &lower_bnds, const RealVector &upper_bnds)

  alternate constructor for sample generation "on the fly"

- ~NonD ()

  destructor

- void initialize_run ()

  typically memory initialization; setting of instance pointers

- void run ()
  and may include pre/post steps in lieu of separate pre/post
- void finalize_run ()
  deallocation and resetting of instance pointers
- const Response & response_results () const
  return the final statistics from the nondeterministic iteration
- void response_results_active_set (const ActiveSet &set)
  set the active set within finalStatistics
- virtual void quantify_uncertainty ()=0
  distributions into response statistics
- virtual void initialize_final_statistics ()
  initializes finalStatistics for storing NonD final results
- void initialize_random_variable_types (short u_space_type)
  initializes ranVarTypesX and ranVarTypesU within natafTransform
- void initialize_random_variable_parameters ()
  ranVarUpperBndsX, and ranVarAddtlParamsX within natafTransform
- void initialize_final_statistics_gradients ()
  initializes finalStatistics::functionGradients
- void initialize_distribution_mappings ()
  size computed{Resp,Prob,Rel,GenRel}Levels
- void print_distribution_mappings (std::ostream &s) const
  {requested,computed}{Resp,Prob,Rel,GenRel}Levels

Static Protected Member Functions

- static void vars_u_to_x_mapping (const Variables &u_vars, Variables &x_vars)
  from NonD Iterators to x-space variables for Model evaluations.
- static void set_u_to_x_mapping (const ActiveSet &u_set, ActiveSet &x_set)
  from NonD Iterators to x-space ActiveSets for Model evaluations.
- static void resp_x_to_u_mapping (const Variables &x_vars, const Variables &u_vars, const Response &x_-response, Response &u_response)
  Model evaluations to u-space responses for return to NonD Iterators.

Protected Attributes

- NonD * prevNondInstance

  pointer containing previous value of nondInstance

- Pecos::ProbabilityTransformation natafTransform

  data for performing transformations from X -> Z -> U and back.

- size_t numContDesVars

  distribution for All view modes)

- size_t numDiscIntDesVars

  histogram distributions for All view modes)

- size_t numDiscRealDesVars

  histogram distributions for All view modes)

- size_t numDesignVars

  total number of design variables

- size_t numContStateVars

  distribution for All view modes)

- size_t numDiscIntStateVars

  histogram distributions for All view modes)

- size_t numDiscRealStateVars

  histogram distributions for All view modes)

- size_t numStateVars

  total number of state variables

- size_t numNormalVars

  number of normal uncertain variables (native space)

- size_t numLognormalVars

  number of lognormal uncertain variables (native space)

- size_t numUniformVars

  number of uniform uncertain variables (native space)

- size_t numLoguniformVars

  number of loguniform uncertain variables (native space)

- size_t numTriangularVars

  number of triangular uncertain variables (native space)

- size_t numExponentialVars

  number of exponential uncertain variables (native space)

- size_t numBetaVars

  number of beta uncertain variables (native space)

- size_t numGammaVars

  number of gamma uncertain variables (native space)

- size_t numGumbelVars

  number of gumbel uncertain variables (native space)

- size_t numFrechetVars

  number of frechet uncertain variables (native space)

- size_t numWeibullVars

  number of weibull uncertain variables (native space)

- size_t numHistogramBinVars

  number of histogram bin uncertain variables (native space)

- size_t numPoissonVars

  number of Poisson uncertain variables (native space)

- size_t numBinomialVars

  number of binomial uncertain variables (native space)

- size_t numNegBinomialVars

  number of negative binomial uncertain variables (native space)

- size_t numGeometricVars

  number of geometric uncertain variables (native space)

- size_t numHyperGeomVars

  number of hypergeometric uncertain variables (native space)

- size_t numHistogramPtVars

  number of histogram point uncertain variables (native space)

- size_t numIntervalVars

  number of interval uncertain variables (native space)

- size_t numContAleatUncVars

  total number of aleatory uncertain variables (native space)

- size_t numDiscIntAleatUncVars

  total number of aleatory uncertain variables (native space)

- size_t numDiscRealAleatUncVars

  total number of aleatory uncertain variables (native space)

- size_t numAleatoryUncVars

  total number of aleatory uncertain variables (native space)

- size_t numContEpistUncVars

  total number of epistemic uncertain variables (native space)

- size_t numDiscIntEpistUncVars

  total number of epistemic uncertain variables (native space)

- size_t numDiscRealEpistUncVars

  total number of epistemic uncertain variables (native space)

- size_t numEpistemicUncVars

  total number of epistemic uncertain variables (native space)

- size_t numUncertainVars

  total number of uncertain variables (native space)

- size_t numResponseFunctions

  number of response functions

- RealVectorArray requestedRespLevels

  requested response levels for all response functions

- RealVectorArray computedProbLevels

  from requestedRespLevels

- RealVectorArray computedRelLevels

  from requestedRespLevels

- RealVectorArray computedGenRelLevels

  resulting from requestedRespLevels

- short respLevelTarget

  or z->beta∗ (GEN_RELIABILITIES)

- RealVectorArray requestedProbLevels

  requested probability levels for all response functions

- RealVectorArray requestedRelLevels

requested reliability levels for all response functions

- RealVectorArray requestedGenRelLevels

  requested generalized reliability levels for all response functions

- RealVectorArray computedRespLevels

  requestedProbLevels, requestedRelLevels, or requestedGenRelLevels

- size_t totalLevelRequests

  requestedProbLevels, and requestedRelLevels

- bool cdfFlag

  cumulative/CDF (true) or complementary/CCDF (false)

- Response finalStatistics

  response means, standard deviations, and probabilities of failure

Static Protected Attributes

- static NonD * nondInstance

  functions in order to avoid the need for static data

Private Member Functions

- void distribute_levels (RealVectorArray &levels)

  response functions if a short-hand specification is employed.

Private Attributes

- bool distParamDerivs

  to standard random variables u using the chain rule df/dx dx/du.

8.72.1 Detailed Description

Base class for all nondetermistic iterators (the DAKOTA/UQ branch).

The base class for nondeterministic iterators consolidates uncertain variable data and probabilistic utilities for inherited classes.

8.72.2 Member Function Documentation

8.72.2.1 void initialize_random_variables (short *u_space_type*)

initialize natafTransform based on distribution data from iteratedModel

Build ProbabilityTransformation::ranVar arrays containing the uncertain variable distribution types and their corresponding means/standard deviations. This function is used when the Model variables are in x-space.

8.72.2.2 void initialize_random_variables (const Pecos::ProbabilityTransformation & *transform*)

alternate form: initialize natafTransform based on incoming data

This function is commonly used to publish tranformation data when the Model variables are in a transformed space (e.g., u-space) and ProbabilityTransformation::ranVarTypes et al. may not be generated directly. This allows for the use of inverse transformations to return the transformed space variables to their original states.

8.72.2.3 void initialize_run () `[inline, protected, virtual]`

typically memory initialization; setting of instance pointers

Perform initialization phases of run sequence, like allocating memory and setting instance pointers. Commonly used in sub-iterator executions. This is a virtual function; when re-implementing, a derived class must call its nearest parent's initialize_run(), typically _before_ performing its own implementation steps.

Reimplemented from Iterator.

8.72.2.4 void run () `[inline, protected, virtual]`

and may include pre/post steps in lieu of separate pre/post

Virtual run function for the iterator class hierarchy. All derived classes need to redefine it.

Reimplemented from Iterator.

8.72.2.5 void finalize_run () `[inline, protected, virtual]`

deallocation and resetting of instance pointers

Optional: perform finalization phases of run sequence, like deallocating memory and resetting instance pointers. Commonly used in sub-iterator executions. This is a virtual function; when re-implementing, a derived class must call its nearest parent's finalize_run(), typically _after_ performing its own implementation steps.

Reimplemented from Iterator.

8.72.2.6 void initialize_final_statistics () `[protected, virtual]`

initializes finalStatistics for storing NonD final results

Default definition of virtual function (used by sampling, reliability, and polynomial chaos) defines the set of statistical results to include means, standard deviations, and level mappings.

Reimplemented in NonDInterval.

8.72.2.7 void initialize_random_variable_types (short *u_space_type*) [protected]

initializes ranVarTypesX and ranVarTypesU within natafTransform

Build ProbabilityTransformation::ranVar arrays containing the uncertain variable distribution types and their corresponding means/standard deviations. This function is used when the Model variables are in x-space.

8.72.2.8 void initialize_random_variable_parameters () [protected]

ranVarUpperBndsX, and ranVarAddtlParamsX within natafTransform

Build ProbabilityTransformation::ranVar arrays containing the uncertain variable distribution types and their corresponding means/standard deviations. This function is used when the Model variables are in x-space.

8.72.2.9 void vars_u_to_x_mapping (const Variables & *u_vars*, Variables & *x_vars*) [static, protected]

from NonD Iterators to x-space variables for Model evaluations.

Map the variables from iterator space (u) to simulation space (x).

8.72.2.10 void set_u_to_x_mapping (const ActiveSet & *u_set*, ActiveSet & *x_set*) [static, protected]

from NonD Iterators to x-space ActiveSets for Model evaluations.

Define the DVV for x-space derivative evaluations by augmenting the iterator requests to account for correlations.

The documentation for this class was generated from the following files:

- DakotaNonD.H
- DakotaNonD.C

8.73 NonDAdaptImpSampling Class Reference

Class for the Adaptive Importance Sampling methods within DAKOTA.

Inheritance diagram for NonDAdaptImpSampling::

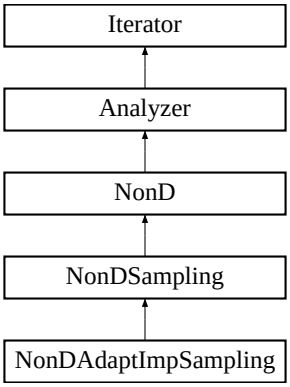

Public Member Functions

- NonDAdaptImpSampling (Model &model)

  constructors standard constructor

- NonDAdaptImpSampling (Model &model, const String &sample_type, int samples, int seed, const String &rng, short is_type, bool cdf_flag, bool x_space_data, bool x_space_model, bool bounded_model)
- ~NonDAdaptImpSampling ()

  destructor

- void quantify_uncertainty ()

  failure.

- void initialize (const RealVectorArray &initial_points, int resp_fn, const Real &initial_prob, const Real &failure_threshold)

  initial probability to refine, and flags to control transformations

- void initialize (const RealVector &initial_point, int resp_fn, const Real &initial_prob, const Real &failure_threshold)

  initial probability to refine, and flags to control transformations

- const Real & get_probability ()

  returns the probability calculated by the importance sampling

Private Member Functions

- void converge_cov ()

  until coefficient of variation converges

- void converge_probability ()

  until probability converges

- void select_init_rep_points (const RealVectorArray &samples)

  select representative points from initial set of samples

- void select_rep_points (const RealVectorArray &samples)

  select representative points from a set of samples

- void calculate_rep_weights ()

  calculate relative weights of representative points

- void generate_samples (RealVectorArray &samples)

  generate a set of samples based on multimodal sampling density

- void calculate_statistics (const RealVectorArray &samples, const size_t &total_sample_number, Real &probability_sum, Real &probability, bool cov_flag, Real &variance_sum, Real &coeff_of_variation)

  the coefficent of variation (if requested)

Private Attributes

- short importanceSamplingType

  integration type (is, ais, mmais) provided by input specification

- bool invertProb

  flag for inversion of probability values using 1.-p

- size_t numRepPoints

  the number of representative points around which to sample

- size_t respFn

  the response function in the model to be sampled

- RealVectorArray initPoints

  the original set of samples passed into the MMAIS routine

- RealVectorArray repPoints

  the set of representative points around which to sample

- RealVector repWeights

the weight associated with each representative point

- RealVector designPoint

  design point at which uncertain space is being sampled

- bool transInitPoints

  initial points

- bool transPoints

  before evaluation

- bool useModelBounds

  flag to control if the sampler should respect the model bounds

- bool initLHS

  flag to identify if initial points are generated from an LHS sample

- Real initProb

  the initial probability (from FORM or SORM)

- Real finalProb

  the final calculated probability (p)

- Real failThresh

  the failure threshold (z-bar) for the problem.

8.73.1 Detailed Description

Class for the Adaptive Importance Sampling methods within DAKOTA.

The NonDAdaptImpSampling implements the multi-modal adaptive importance sampling used for reliability calculations. (eventually we will want to broaden this). Need to add more detail to this description.

8.73.2 Constructor & Destructor Documentation

8.73.2.1 NonDAdaptImpSampling (Model & *model*)

constructors standard constructor

This is the primary constructor. It accepts a Model reference.

8.73.2.2 NonDAdaptImpSampling (Model & *model*, const String & *sample_type*, int *samples*, int *seed*, const String & *rng*, short *is_type*, bool *cdf_flag*, bool *x_space_data*, bool *x_space_model*, bool *bounded_model*)

This is an alternate constructor for instantiations on the fly using a Model but no ProblemDescDB.

8.73.3 Member Function Documentation

8.73.3.1 void initialize (const RealVectorArray & *initial_points*, int *resp_fn*, const Real & *initial_prob*, const Real & *failure_threshold*)

initial probability to refine, and flags to control transformations

Initializes data using a set of starting points.

8.73.3.2 void initialize (const RealVector & *initial_point*, int *resp_fn*, const Real & *initial_prob*, const Real & *failure_threshold*)

initial probability to refine, and flags to control transformations

Initializes data using only one starting point.

The documentation for this class was generated from the following files:

- NonDAdaptImpSampling.H
- NonDAdaptImpSampling.C

8.74 NonDBayesCalibration Class Reference

distribution on model parameters given experimental data

Inheritance diagram for NonDBayesCalibration::

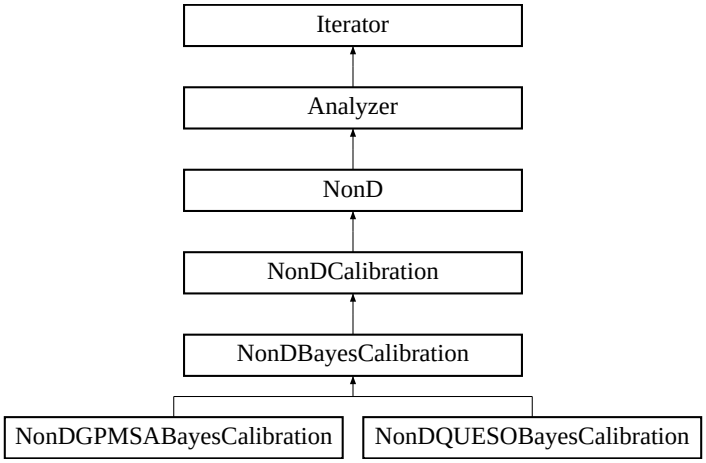

Public Member Functions

- NonDBayesCalibration (Model &model)

  standard constructor

- ~NonDBayesCalibration ()

  destructor

Protected Attributes

- Model emulatorModel

  or direct access to simulations (no surrogate option)

- const int seedSpec

  the user seed specification (default is 0)

- int numSamples

  the current number of samples to evaluate

- String rngName

  name of the random number generator

8.74.1 Detailed Description

distribution on model parameters given experimental data

This class will eventually provide a general-purpose framework for Bayesian inference. In the short term, it only collects shared code between QUESO and GPMSA implementations.

8.74.2 Constructor & Destructor Documentation

8.74.2.1 NonDBayesCalibration (Model & *model*)

standard constructor

This constructor is called for a standard letter-envelope iterator instantiation. In this case, set_db_list_nodes has been called and probDescDB can be queried for settings from the method specification.

The documentation for this class was generated from the following files:

- NonDBayesCalibration.H
- NonDBayesCalibration.C

8.75 NonDCalibration Class Reference

Inheritance diagram for NonDCalibration::

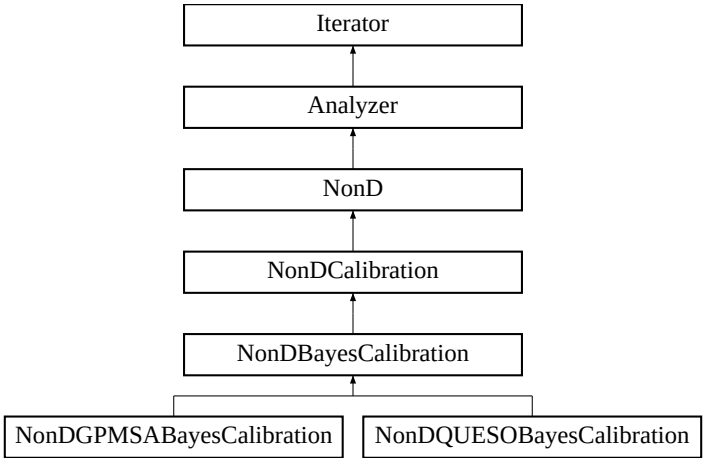

Public Member Functions

- NonDCalibration (Model &model)

  standard constructor

- ~NonDCalibration ()

  destructor

8.75.1 Detailed Description

This class ...

8.75.2 Constructor & Destructor Documentation

8.75.2.1 NonDCalibration (Model & *model*)

standard constructor

This constructor is called for a standard letter-envelope iterator instantiation. In this case, set_db_list_nodes has been called and probDescDB can be queried for settings from the method specification.

The documentation for this class was generated from the following files:

- NonDCalibration.H
- NonDCalibration.C

8.76 NonDCubature Class Reference

numerical cubature points for evaluation of expectation integrals.

Inheritance diagram for NonDCubature::

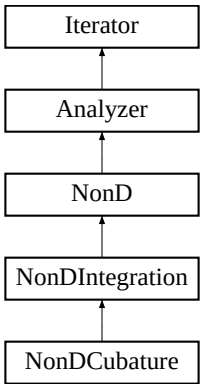

Public Member Functions

- NonDCubature (Model &model, const Pecos::ShortArray &u_types, unsigned short cub_int_order)
- unsigned short integrand_order () const

  return cubIntOrder

Protected Member Functions

- NonDCubature (Model &model)

  constructor

- ~NonDCubature ()

  destructor

- void get_parameter_sets (Model &model)

  Returns one block of samples (ndim ∗ num_samples).

- void sampling_reset (int min_samples, bool all_data_flag, bool stats_flag)
- void increment_grid ()

  increment SSG level/TPQ order

- void increment_grid (const RealVector &dim_pref)

Private Member Functions

- void anisotropic_preference (const RealVector &dim_pref)

  update cubIntOrder based on an updated dimension preference

- void check_integration (const Pecos::ShortArray &u_types, const Pecos::DistributionParams &dp)

  verify self-consistency of integration specification

- void increment_reference ()

  increment each cubIntOrderRef entry by 1

Private Attributes

- Pecos::CubatureDriver * cubDriver

  convenience pointer to the numIntDriver representation

- unsigned short cubIntOrderRef

  any refinements posted by increment_grid()

- unsigned short cubIntRule

  the isotropic cubature integration rule

8.76.1 Detailed Description

numerical cubature points for evaluation of expectation integrals.

This class is used by NonDPolynomialChaos, but could also be used for general numerical integration of moments. It employs Stroud cubature rules and extensions by D. Xiu.

8.76.2 Constructor & Destructor Documentation

8.76.2.1 NonDCubature (Model & *model*, const Pecos::ShortArray & *u_types*, unsigned short *cub_int_order*)

This alternate constructor is used for on-the-fly generation and evaluation of numerical cubature points.

8.76.2.2 NonDCubature (Model & *model*) [protected]

constructor

This constructor is called for a standard letter-envelope iterator instantiation. In this case, set_db_list_nodes has been called and probDescDB can be queried for settings from the method specification. It is not currently used, as there is not yet a separate nond_cubature method specification.

8.76.3 Member Function Documentation

8.76.3.1 void sampling_reset (int *min_samples*, bool *all_data_flag*, bool *stats_flag*) [protected, virtual]

used by DataFitSurrModel::build_global() to publish the minimum number of points needed from the cubature routine in order to build a particular global approximation.

Reimplemented from Iterator.

8.76.3.2 void increment_grid (const RealVector & *dim_pref*) [inline, protected, virtual]

Should not be used, but pure virtual must be defined.

Implements NonDIntegration.

8.76.3.3 void increment_reference () [inline, private]

increment each cubIntOrderRef entry by 1

cubIntOrderRef is a reference point for CubatureDriver::cubIntOrder, e.g., a lower bound

The documentation for this class was generated from the following files:

- NonDCubature.H
- NonDCubature.C

8.77 NonDExpansion Class Reference

collocation (SC)

Inheritance diagram for NonDExpansion::

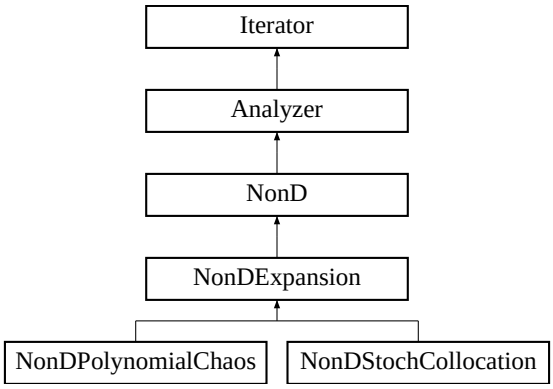

Public Member Functions

- NonDExpansion (Model &model)

  constructor

- ~NonDExpansion ()

  destructor

- void quantify_uncertainty ()

  perform a forward uncertainty propagation using PCE/SC methods

- void print_results (std::ostream &s)

  print the final statistics

Protected Member Functions

- virtual void initialize_expansion ()

  initialize random variable definitions and final stats arrays

- virtual void compute_expansion ()

  form the expansion by calling uSpaceModel.build_approximation()

- virtual void print_coefficients (std::ostream &s)

  print expansion coefficients, as supported by derived instance

- virtual void print_moments (std::ostream &s)

print expansion and numerical moments, as supported by derived instance

- void update_expansion ()

  avoids unnecessary overhead in compute_expansion()

- void construct_g_u_model (Model &g_u_model)

  recast iteratedModel from x-space to u-space to create g_u_model

- void construct_cubature (Iterator &u_space_sampler, Model &g_u_model, unsigned short cub_int_order)

  assign a NonDCubature instance within u_space_sampler

- void construct_quadrature (Iterator &u_space_sampler, Model &g_u_model, const UShortArray &quad_-order)

  assign a NonDQuadrature instance within u_space_sampler

- void construct_sparse_grid (Iterator &u_space_sampler, Model &g_u_model, unsigned short ssg_level, const RealVector &ssg_dim_pref)

  assign a NonDSparsegrid instance within u_space_sampler

- void construct_lhs (Iterator &u_space_sampler, Model &g_u_model)

  assign a NonDLHSSampling instance within u_space_sampler

- void initialize_u_space_model ()

  initialize uSpaceModel polynomial approximations with PCE/SC data

- void construct_expansion_sampler ()

  construct the expansionSampler operating on uSpaceModel

- void compute_statistics ()

  calculate analytic and numerical statistics from the expansion

- void update_final_statistics ()

  update finalStatistics

Protected Attributes

- Model uSpaceModel

  u-space recasting and orthogonal polynomial data fit recursions

- short expansionCoeffsApproach

  calculation of the expanion coefficients

- size_t numUncertainQuant

  number of invocations of quantify_uncertainty()

- int numSamplesOnModel

  number of truth samples performed on g_u_model to form the expansion

- int numSamplesOnExpansion

  expansion in order to estimate probabilities

- bool useDerivsFlag

  the stochastic expansion.

Private Member Functions

- void average_total_sobol (RealVector &avg_sobol)

  anisotropy indicator

- void average_decay_rates (RealVector &avg_decay)

  an anisotropy indicator

- void initialize_sets ()

  initialization of adaptive refinement using generalized sparse grids

- Real increment_sets ()

  perform an adaptive refinement increment using generalized sparse grids

- void finalize_sets ()

  finalization of adaptive refinement using generalized sparse grids

- Real compute_covariance_metric (const RealSymMatrix &resp_covar_ref)

  compute 2-norm of change in response covariance

- Real compute_final_statistics_metric (const RealVector &final_stats_ref)

  compute 2-norm of change in final statistics

- void compute_covariance ()

  calculate respCovariance

- void print_covariance (std::ostream &s)

  print respCovariance

- void print_sobol_indices (std::ostream &s)

  print global sensitivity indices

- void print_local_sensitivity (std::ostream &s)

  print local sensitivities evaluated at initialPtU

- void compute_print_increment_results ()

manage print of results following a refinement increment

- void compute_print_iteration_results (bool initialize)

  manage print of results following a refinement increment

- void compute_print_converged_results ()

  manage print of results following convergence of iterative refinement

Private Attributes

- short ruleNestingOverride

  user override of rule nesting: NO_OVERRIDE, NESTED, or NON_NESTED

- short stochExpRefineType

  ADAPTIVE_P_REFINEMENT.

- short stochExpRefineControl

  or GENERALIZED_SPARSE

- bool impSampling

  flag to use LHS sampling or MMAIS sampling on the expansion

- Iterator expansionSampler

  an LHS sampling instance, but AIS could also be used.

- Iterator importanceSampler

  generated by the expansionSampler using importance sampling

- RealVector initialPtU

  stores the initial variables data in u-space

- RealMatrix expGradsMeanX

  evaluated at the means (used as uncertainty importance metrics)

- RealSymMatrix respCovariance

  symmetric matrix of analytic response covariance

- bool expSampling

  on the expansion

- short vbdControl

  UNIVARIATE_VBD, or ALL_VBD.

- Real vbdDropTol

  tolerance for omitting output of small VBD indices

8.77.1 Detailed Description

collocation (SC)

The NonDExpansion class provides a base class for methods that use polynomial expansions to approximate the effect of parameter uncertainties on response functions of interest.

8.77.2 Member Function Documentation

8.77.2.1 void compute_statistics () [protected]

calculate analytic and numerical statistics from the expansion

Calculate analytic and numerical statistics from the expansion and log results within final_stats for use in OUU.

8.77.2.2 Real compute_final_statistics_metric (const RealVector & *final_stats_ref*) [private]

compute 2-norm of change in final statistics

computes a "goal-oriented" refinement metric employing finalStatistics

8.77.3 Member Data Documentation

8.77.3.1 bool useDerivsFlag [protected]

the stochastic expansion.

This is part of the method specification since the instantiation of the global data fit surrogate is implicit with no user specification. This behavior is distinct from the usage of response derivatives with respect to auxilliary variables (design, epistemic) for computing derivatives of aleatory expansion statistics with respect to these variables.

The documentation for this class was generated from the following files:

- NonDExpansion.H
- NonDExpansion.C

8.78 NonDGlobalEvidence Class Reference

Class for the Dempster-Shafer Evidence Theory methods within DAKOTA/UQ.

Inheritance diagram for NonDGlobalEvidence::

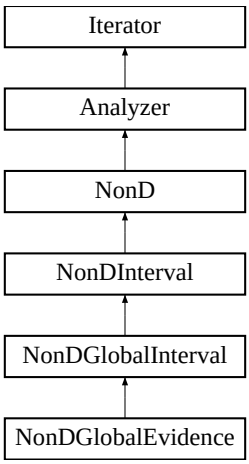

Public Member Functions

- NonDGlobalEvidence (Model &model)
  constructor
- ~NonDGlobalEvidence ()
  destructor
- void initialize ()
  perform any required initialization
- void set_cell_bounds ()
  set the optimization variable bounds for each cell
- void get_best_sample (bool find_max, bool eval_approx)
  determine truthFnStar and approxFnStar
- void post_process_cell_results (bool minimize)
  post-process a cell minimization/maximization result
- void post_process_response_fn_results ()
  post-process the interval computed for a response function
- void post_process_final_results ()
  perform final post-processing

8.78.1 Detailed Description

Class for the Dempster-Shafer Evidence Theory methods within DAKOTA/UQ.

The NonDEvidence class implements the propagation of epistemic uncertainty using Dempster-Shafer theory of evidence. In this approach, one assigns a set of basic probability assignments (BPA) to intervals defined for the uncertain variables. Input interval combinations are calculated, along with their BPA. Currently, the response function is evaluated at a set of sample points, then a response surface is constructed which is sampled extensively to find the minimum and maximum within each input interval cell, corresponding to the belief and plausibility within that cell, respectively. This data is then aggregated to calculate cumulative distribution functions for belief and plausibility.

The documentation for this class was generated from the following files:

- NonDGlobalEvidence.H
- NonDGlobalEvidence.C

8.79 NonDGlobalInterval Class Reference

to calculate interval bounds for epistemic uncertainty quantification

Inheritance diagram for NonDGlobalInterval::

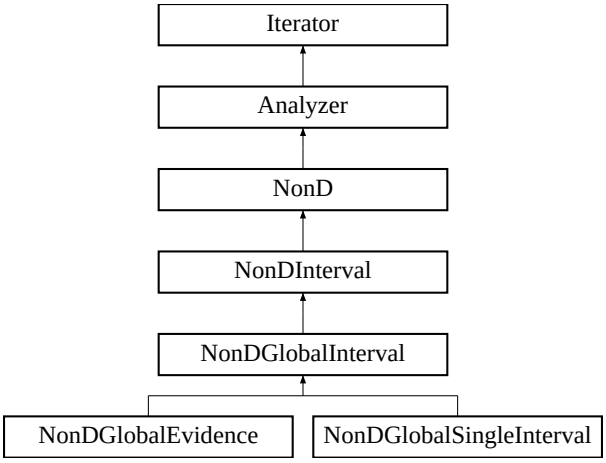

Public Member Functions

- NonDGlobalInterval (Model &model)

  constructor

- ~NonDGlobalInterval ()

  destructor

- void quantify_uncertainty ()

  entire function or interval bounds on a particular statistical estimator

Protected Member Functions

- virtual void initialize ()

  perform any required initialization

- virtual void set_cell_bounds ()

  set the optimization variable bounds for each cell

- virtual void get_best_sample (bool find_max, bool eval_approx)

  determine truthFnStar and approxFnStar

- virtual void post_process_cell_results (bool minimize)

post-process a cell minimization/maximization result

- virtual void post_process_response_fn_results ()

  post-process the interval computed for a response function

- virtual void post_process_final_results ()

  perform final post-processing

- void post_process_gp_results ()

  results, update convergence controls, and update GP approximation

Protected Attributes

- Iterator daceIterator

  LHS iterator for constructing initial GP for all response functions.

- Iterator gpOptimizer

  NCSU DIRECT optimizer for maximizing expected improvement.

- Model fHatModel

  GP model of response, one approximation per response function.

- Model eifModel

  max(EIF) sub-problem

- Real approxFnStar

  approximate response corresponding to minimum/maximum truth response

- Real truthFnStar

  minimum/maximum truth response function value

Static Private Member Functions

- static void EIF_objective_min (const Variables &sub_model_vars, const Variables &recast_vars, const Response &sub_model_response, Response &recast_response)

  Expected Improvement Function (EIF) for minimizing the GP.

- static void EIF_objective_max (const Variables &sub_model_vars, const Variables &recast_vars, const Response &sub_model_response, Response &recast_response)

  Expected Improvement Function (EIF) for maximizing the GP.

Private Attributes

- const int seedSpec

  the user seed specification (default is 0)

- int numSamples

  the number of samples used in the surrogate

- String rngName

  name of the random number generator

- size_t eifConvergenceCntr

  is less than the convergenceTol

- size_t distConvergenceCntr

  in optimal solution is less than the convergenceTol

- RealVector prevCStar

  stores previous optimal points for convergence

- size_t sbIterNum

  surrogate-based minimization/maximization iteration count

- bool approxConverged

  flag indicating convergence of a GP minimization or maximization

- bool allResponsesPerIter

  flag for maximal response extraction

Static Private Attributes

- static NonDGlobalInterval * nondGIInstance

  functions in order to avoid the need for static data

8.79.1 Detailed Description

to calculate interval bounds for epistemic uncertainty quantification

The NonDGlobalInterval class supports global nongradient-based optimization apporaches to determining interval bounds for epistemic UQ. The interval bounds may be on the entire function in the case of pure interval analysis (e.g. intervals on input = intervals on output), or the intervals may be on statistics of an "inner loop" aleatory analysis such as intervals on means, variances, or percentile levels. The preliminary implementation will use a Gaussian process surrogate to determine interval bounds.

The documentation for this class was generated from the following files:

- NonDGlobalInterval.H
- NonDGlobalInterval.C

8.80 NonDGlobalReliability Class Reference

Class for global reliability methods within DAKOTA/UQ.

Inheritance diagram for NonDGlobalReliability::

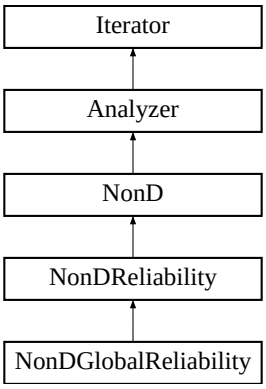

Public Member Functions

- NonDGlobalReliability (Model &model)
  constructor
- ~NonDGlobalReliability ()
  destructor
- void quantify_uncertainty ()
  approximations of the cumulative distribution function of response
- void print_results (std::ostream &s)
  MPP-search-based reliability methods.

Private Member Functions

- void optimize_gaussian_process ()
  construct the GP using EGO/SKO
- void importance_sampling ()
  perform multimodal adaptive importance sampling on the GP
- void get_best_sample ()
  imporovement function in Performance Measure Approach (PMA)
- Real constraint_penalty (const Real &constraint, const RealVector &c_variables)

calculate the penalty to be applied to the PMA constraint value

- Real expected_improvement (const RealVector &expected_values, const RealVector &c_variables)

  expected improvement function for the GP

- Real expected_feasibility (const RealVector &expected_values, const RealVector &c_variables)

  expected feasibility function for the GP

Static Private Member Functions

- static void EIF_objective_eval (const Variables &sub_model_vars, const Variables &recast_vars, const Response &sub_model_response, Response &recast_response)

  Expected Improvement (EIF) problem formulation for PMA.

- static void EFF_objective_eval (const Variables &sub_model_vars, const Variables &recast_vars, const Response &sub_model_response, Response &recast_response)

  Expected Feasibility (EFF) problem formulation for RIA.

Private Attributes

- Real fnStar

  minimum penalized response from among true function evaluations

- short meritFunctionType

  type of merit function used to penalize sample data

- Real lagrangeMult

  Lagrange multiplier for standard Lagrangian merit function.

- Real augLagrangeMult

  Lagrange multiplier for augmented Lagrangian merit function.

- Real penaltyParameter

  penalty parameter for augmented Lagrangian merit funciton

- Real lastConstraintViolation

  current iterate should be accepted (must reduce violation)

- bool lastIterateAccepted

  this controls update of parameters for augmented Lagrangian merit fn

Static Private Attributes

- static NonDGlobalReliability * nondGlobRelInstance

  functions in order to avoid the need for static data

8.80.1 Detailed Description

Class for global reliability methods within DAKOTA/UQ.

The NonDGlobalReliability class implements EGO/SKO for global MPP search, which maximizes an expected improvement function derived from Gaussian process models. Once the limit state has been characterized, a multimodal importance sampling approach is used to compute probabilities.

The documentation for this class was generated from the following files:

- NonDGlobalReliability.H
- NonDGlobalReliability.C

8.81 NonDGlobalSingleInterval Class Reference

to calculate interval bounds for epistemic uncertainty quantification

Inheritance diagram for NonDGlobalSingleInterval::

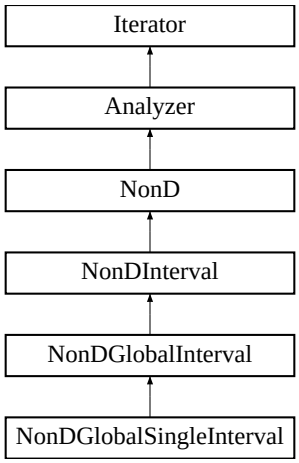

Public Member Functions

- NonDGlobalSingleInterval (Model &model)

  constructor

- ~NonDGlobalSingleInterval ()

  destructor

Protected Member Functions

- void initialize ()

  perform any required initialization

- void post_process_cell_results (bool minimize)

  post-process a cell minimization/maximization result

- void get_best_sample (bool find_max, bool eval_approx)

  determine truthFnStar and approxFnStar

Private Attributes

- size_t statCntr

counter for finalStatistics

8.81.1 Detailed Description

to calculate interval bounds for epistemic uncertainty quantification

The NonDGlobalSingleInterval class supports global nongradient-based optimization apporaches to determining interval bounds for epistemic UQ. The interval bounds may be on the entire function in the case of pure interval analysis (e.g. intervals on input = intervals on output), or the intervals may be on statistics of an "inner loop" aleatory analysis such as intervals on means, variances, or percentile levels. The preliminary implementation will use a Gaussian process surrogate to determine interval bounds.

The documentation for this class was generated from the following files:

- NonDGlobalSingleInterval.H
- NonDGlobalSingleInterval.C

8.82 NonDGPMSABayesCalibration Class Reference

Generates posterior distribution on model parameters given experiment data.

Inheritance diagram for NonDGPMSABayesCalibration::

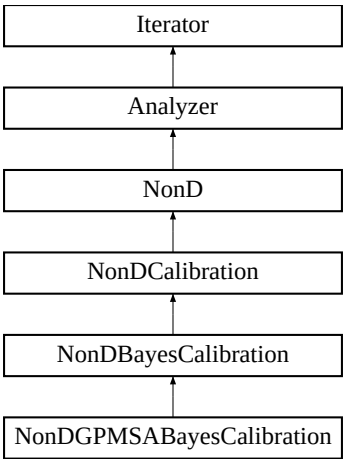

Public Member Functions

- NonDGPMSABayesCalibration (Model &model)

  standard constructor

- ~NonDGPMSABayesCalibration ()

  destructor

Public Attributes

- String xObsDataFile

  filename from which to read observed x data

- String yObsDataFile

  filename from which to read observed y data

- String yStdDataFile

  filename from which to read observed std of y data

Protected Member Functions

- void quantify_uncertainty ()

additional variables to be specified here.

- void print_results (std::ostream &s)

  print the final statistics

Private Attributes

- Iterator lhsSampler

  LHS sampling iterator.

- RealArray xObsData

  Storage for the observed x data (inputs) provided by the user.

- RealArray yObsData

  Storage for the observed y data (outputs) provided by the user.

- RealArray yStdData

  Storage for the observed standard deviations of y provided by the user.

8.82.1 Detailed Description

Generates posterior distribution on model parameters given experiment data.

This class provides a wrapper for the functionality provided in the Los Alamos National Laboratory code called GPM/SA (Gaussian Process Models for Simulation Analysis). Although this is a code that provides input/output mapping, it DOES NOT provide the mapping that we usually think of in the NonDeterministic class hierarchy in DAKOTA, where uncertainty in parameter inputs are mapped to uncertainty in simulation responses. Instead, this class takes a pre-existing set of simulation data as well as experimental data, and maps priors on input parameters to posterior distributions on those input parameters, according to a likelihood function. The goal of the MCMC sampling is to produce posterior values of parameter estimates which will produce simulation response values that "match well" to the experimental data. The MCMC is an integral part of the calibration. The data structures in GPM/SA are fairly detailed and nested. Part of this prototyping exercise is to determine what data structures need to be specified and initialized in DAKOTA and sent to GPM/SA, and what data structures will be returned.

8.82.2 Constructor & Destructor Documentation

8.82.2.1 NonDGPMSABayesCalibration (Model & *model*)

standard constructor

This constructor is called for a standard letter-envelope iterator instantiation. In this case, set_db_list_nodes has been called and probDescDB can be queried for settings from the method specification.

8.82.3 Member Function Documentation

8.82.3.1 void quantify_uncertainty () [protected, virtual]

additional variables to be specified here.

This method does all the pre-processing necessary to call the GPM/SA code, including running LHS on the model to generate the initial samples, doing some normalization, calling the GPM/SA functions, and returning the posterior parameter distributions.

Implements NonD.

The documentation for this class was generated from the following files:

- NonDGPMSABayesCalibration.H
- NonDGPMSABayesCalibration.C

8.83 NonDIncremLHSSampling Class Reference

Performs icremental LHS sampling for uncertainty quantification.

Inheritance diagram for NonDIncremLHSSampling::

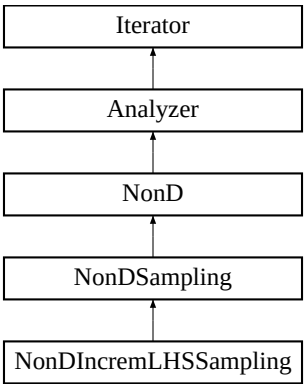

Public Member Functions

- NonDIncremLHSSampling (Model &model)

  constructor

- ~NonDIncremLHSSampling ()

  destructor

- void quantify_uncertainty ()

  parameter samples, and computing statistics on the ensemble of results.

- void print_results (std::ostream &s)

  print the final statistics

Static Protected Member Functions

- static bool rank_sort (const int &x, const int &y)

  sort algorithm to compute ranks for rank correlations

Private Attributes

- int previousSamples

  number of samples in previous LHS run

- bool varBasedDecompFlag

  flags computation of VBD

Static Private Attributes

- static RealArray rawData

  static data used by static rank_sort() fn

8.83.1 Detailed Description

Performs icremental LHS sampling for uncertainty quantification.

The Latin Hypercube Sampling (LHS) package from Sandia Albuquerque's Risk and Reliability organization provides comprehensive capabilities for Monte Carlo and Latin Hypercube sampling within a broad array of user-specified probabilistic parameter distributions. The icremental LHS sampling capability allows one to supplement an initial sample of size n to size 2n while maintaining the correct stratification of the 2n samples and also maintaining the specified correlation structure. The icremental version of LHS will return a sample of size n, which when combined with the original sample of size n, allows one to double the size of the sample.

8.83.2 Constructor & Destructor Documentation

8.83.2.1 NonDIncremLHSSampling (Model & *model*)

constructor

This constructor is called for a standard letter-envelope iterator instantiation. In this case, set_db_list_nodes has been called and probDescDB can be queried for settings from the method specification.

8.83.3 Member Function Documentation

8.83.3.1 void quantify_uncertainty () `[virtual]`

parameter samples, and computing statistics on the ensemble of results.

Generate incremental samples. Loop over the set of samples and compute responses. Compute statistics on the set of responses if statsFlag is set.

Implements NonD.

The documentation for this class was generated from the following files:

- NonDIncremLHSSampling.H
- NonDIncremLHSSampling.C

8.84 NonDIntegration Class Reference

numerical integration points for evaluation of expectation integrals

Inheritance diagram for NonDIntegration::

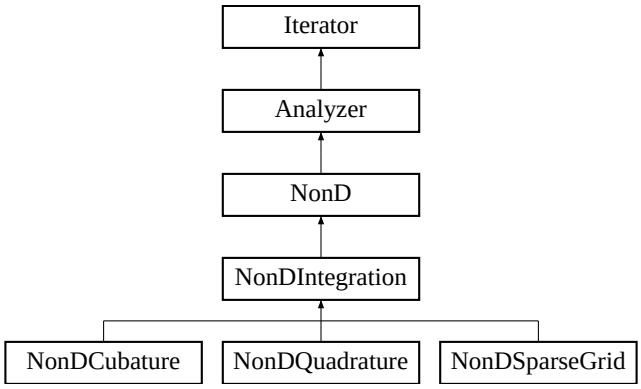

Public Member Functions

- virtual void increment_grid ()=0

  increment SSG level/TPQ order

- virtual void increment_grid (const RealVector &dim_pref)=0

  increment SSG level/TPQ order and update anisotropy

- const Pecos::IntegrationDriver & driver () const

  return numIntDriver

Protected Member Functions

- NonDIntegration (Model &model)

  constructor

- NonDIntegration (NoDBBaseConstructor, Model &model)

  alternate constructor for instantiations "on the fly"

- ~NonDIntegration ()

  destructor

- void quantify_uncertainty ()

  distributions into response statistics

- void check_variables (const Pecos::ShortArray &x_types)

verify self-consistency of variables data

Protected Attributes

- Pecos::IntegrationDriver numIntDriver

  and VPISparseGrid utilities for Smolyak sparse grids and cubature

- size_t numIntegrations

  counter for number of integration executions for this object

8.84.1 Detailed Description

numerical integration points for evaluation of expectation integrals

This class provides a base class for shared code among NonDQuadrature and NonDSparseGrid.

8.84.2 Constructor & Destructor Documentation

8.84.2.1 NonDIntegration (Model & *model*) [protected]

constructor

This constructor is called for a standard letter-envelope iterator instantiation. In this case, set_db_list_nodes has been called and probDescDB can be queried for settings from the method specification. It is not currently used, as there are not yet separate nond_quadrature/nond_sparse_grid method specifications.

8.84.2.2 NonDIntegration (NoDBBaseConstructor, Model & *model*) [protected]

alternate constructor for instantiations "on the fly"

This alternate constructor is used for on-the-fly generation and evaluation of numerical integration points.

8.84.3 Member Function Documentation

8.84.3.1 void check_variables (const Pecos::ShortArray & *x_types*) [protected]

verify self-consistency of variables data

Virtual function called from probDescDB-based constructors and from NonDIntegration::quantify_uncertainty()

The documentation for this class was generated from the following files:

- NonDIntegration.H
- NonDIntegration.C

8.85 NonDInterval Class Reference

Base class for interval-based methods within DAKOTA/UQ.

Inheritance diagram for NonDInterval::

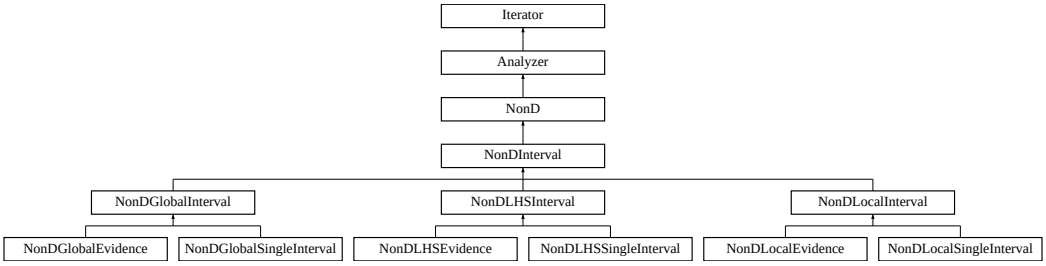

Public Member Functions

- NonDInterval (Model &model)

  constructor

- ~NonDInterval ()

  destructor

- void print_results (std::ostream &s)

  print the cumulative distribution functions for belief and plausibility

Protected Member Functions

- void initialize_final_statistics ()

  initialize finalStatistics for belief/plausibility results sets

- void compute_evidence_statistics ()

  or vice-versa

- void calculate_cells_and_bpas ()

  replaces CBPIIC_F77 from wrapper calculate_basic_prob_intervals()

- void calculate_cbf_cpf (bool complementary=true)

  plausibility replaces CCBFPF_F77 from wrapper calculate_cum_belief_plaus()

Protected Attributes

- bool singleIntervalFlag

flag for SingleInterval derived class

- RealVectorArray ccBelFn

  Storage array to hold CCBF values.

- RealVectorArray ccPlausFn

  Storage array to hold CCPF values.

- RealVectorArray ccBelVal

  Storage array to hold CCB response values.

- RealVectorArray ccPlausVal

  Storage array to hold CCP response values.

- RealVectorArray cellLowerBounds

  Storage array to hold cell lower bounds.

- RealVectorArray cellUpperBounds

  Storage array to hold cell upper bounds.

- Real2DArray cellFnLowerBounds

  Storage array to hold cell min.

- Real2DArray cellFnUpperBounds

  Storage array to hold cell max.

- RealArray cellBPA

  Storage array to hold cell bpa.

- size_t respFnCntr

  response function counter

- size_t cellCntr

  cell counter

- size_t numCells

  total number of interval combinations

8.85.1 Detailed Description

Base class for interval-based methods within DAKOTA/UQ.

The NonDInterval class implements the propagation of epistemic uncertainty using either pure interval propagation or Dempster-Shafer theory of evidence. In the latter approach, one assigns a set of basic probability assignments (BPA) to intervals defined for the uncertain variables. Input interval combinations are calculated,

along with their BPA. Currently, the response function is evaluated at a set of sample points, then a response surface is constructed which is sampled extensively to find the minimum and maximum within each input interval cell, corresponding to the belief and plausibility within that cell, respectively. This data is then aggregated to calculate cumulative distribution functions for belief and plausibility.

The documentation for this class was generated from the following files:

- NonDInterval.H
- NonDInterval.C

8.86 NonDLHSEvidence Class Reference

Class for the Dempster-Shafer Evidence Theory methods within DAKOTA/UQ.

Inheritance diagram for NonDLHSEvidence::

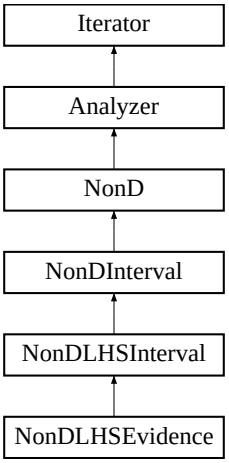

Public Member Functions

- NonDLHSEvidence (Model &model)
  constructor
- ~NonDLHSEvidence ()
  destructor
- void initialize ()
  perform any required initialization
- void post_process_samples ()
  post-process the output from executing lhsSampler

8.86.1 Detailed Description

Class for the Dempster-Shafer Evidence Theory methods within DAKOTA/UQ.

The NonDEvidence class implements the propagation of epistemic uncertainty using Dempster-Shafer theory of evidence. In this approach, one assigns a set of basic probability assignments (BPA) to intervals defined for the uncertain variables. Input interval combinations are calculated, along with their BPA. Currently, the response function is evaluated at a set of sample points, then a response surface is constructed which is sampled extensively to find the minimum and maximum within each input interval cell, corresponding to the belief and plausibility within that cell, respectively. This data is then aggregated to calculate cumulative distribution functions for belief and plausibility.

The documentation for this class was generated from the following files:

- NonDLHSEvidence.H
- NonDLHSEvidence.C

8.87 NonDLHSInterval Class Reference

Class for the LHS-based interval methods within DAKOTA/UQ.

Inheritance diagram for NonDLHSInterval::

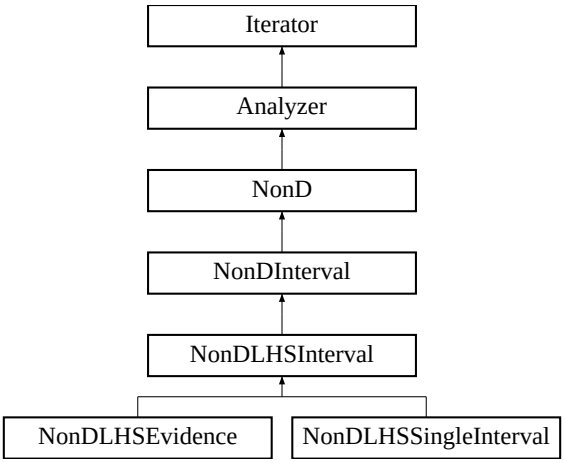

Public Member Functions

- NonDLHSInterval (Model &model)

  constructor

- ~NonDLHSInterval ()

  destructor

- void quantify_uncertainty ()

  performs an epistemic uncertainty propagation using LHS samples

Protected Member Functions

- virtual void initialize ()

  perform any required initialization

- virtual void post_process_samples ()=0

  post-process the output from executing lhsSampler

Protected Attributes

- Iterator lhsSampler

the LHS sampler instance

- const int seedSpec

  the user seed specification (default is 0)

- int numSamples

  the number of samples used

- String rngName

  name of the random number generator

8.87.1 Detailed Description

Class for the LHS-based interval methods within DAKOTA/UQ.

The NonDLHSInterval class implements the propagation of epistemic uncertainty using LHS-based methods.

The documentation for this class was generated from the following files:

- NonDLHSInterval.H
- NonDLHSInterval.C

8.88 NonDLHSSampling Class Reference

Performs LHS and Monte Carlo sampling for uncertainty quantification.

Inheritance diagram for NonDLHSSampling::

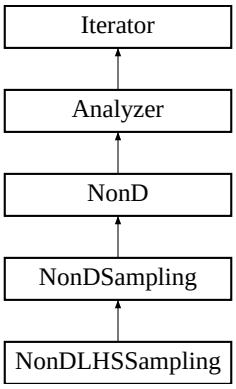

Public Member Functions

- NonDLHSSampling (Model &model)

  standard constructor

- NonDLHSSampling (Model &model, const String &sample_type, int samples, int seed, const String &rng, short sampling_vars_mode=ACTIVE)

  alternate constructor for sample generation and evaluation "on the fly"

- NonDLHSSampling (const String &sample_type, int samples, int seed, const String &rng, const RealVector &lower_bnds, const RealVector &upper_bnds)

  alternate constructor for sample generation "on the fly"

- ~NonDLHSSampling ()

  destructor

Protected Member Functions

- void pre_run ()

  generate LHS samples in non-VBD cases

- void post_input ()

  read tabular data for post-run mode

- void quantify_uncertainty ()

  perform the evaluate parameter sets portion of run

- void post_run (std::ostream &s)

  generate statistics for LHS runs in non-VBD cases

- void print_results (std::ostream &s)

  print the final statistics

Private Attributes

- bool varBasedDecompFlag

  flags computation of VBD

8.88.1 Detailed Description

Performs LHS and Monte Carlo sampling for uncertainty quantification.

The Latin Hypercube Sampling (LHS) package from Sandia Albuquerque's Risk and Reliability organization provides comprehensive capabilities for Monte Carlo and Latin Hypercube sampling within a broad array of user-specified probabilistic parameter distributions. It enforces user-specified rank correlations through use of a mixing routine. The NonDLHSSampling class provides a C++ wrapper for the LHS library and is used for performing forward propagations of parameter uncertainties into response statistics.

8.88.2 Constructor & Destructor Documentation

8.88.2.1 NonDLHSSampling (Model & *model*)

standard constructor

This constructor is called for a standard letter-envelope iterator instantiation. In this case, set_db_list_nodes has been called and probDescDB can be queried for settings from the method specification.

8.88.2.2 NonDLHSSampling (Model & *model*, const String & *sample_type*, int *samples*, int *seed*, const String & *rng*, short *sampling_vars_mode* = `ACTIVE`)

alternate constructor for sample generation and evaluation "on the fly"

This alternate constructor is used for generation and evaluation of Model-based sample sets. A set_db_list_nodes has not been performed so required data must be passed through the constructor. It's purpose is to avoid the need for a separate LHS specification within methods that use LHS sampling.

8.88.2.3 NonDLHSSampling (const String & *sample_type*, int *samples*, int *seed*, const String & *rng*, const RealVector & *lower_bnds*, const RealVector & *upper_bnds*)

alternate constructor for sample generation "on the fly"

This alternate constructor is used by ConcurrentStrategy for generation of uniform, uncorrelated sample sets. It is _not_ a letter-envelope instantiation and a set_db_list_nodes has not been performed. It is called with all needed data passed through the constructor and is designed to allow more flexibility in variables set definition (i.e., relax connection to a variables specification and allow sampling over parameter sets such as multiobjective weights). In this case, a Model is not used and the object must only be used for sample generation (no evaluation).

8.88.3 Member Function Documentation

8.88.3.1 void quantify_uncertainty () [protected, virtual]

perform the evaluate parameter sets portion of run

Loop over the set of samples and compute responses. Compute statistics on the set of responses if statsFlag is set.

Implements NonD.

The documentation for this class was generated from the following files:

- NonDLHSSampling.H
- NonDLHSSampling.C

8.89 NonDLHSSingleInterval Class Reference

Class for pure interval propagation using LHS.

Inheritance diagram for NonDLHSSingleInterval::

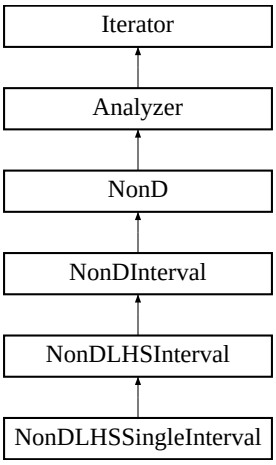

Public Member Functions

- NonDLHSSingleInterval (Model &model)

  constructor

- ~NonDLHSSingleInterval ()

  destructor

Protected Member Functions

- void initialize ()

  perform any required initialization

- void post_process_samples ()

  post-process the output from executing lhsSampler

Private Attributes

- size_t statCntr

  counter for finalStatistics

8.89.1 Detailed Description

Class for pure interval propagation using LHS.

The NonDSingleInterval class implements the propagation of epistemic uncertainty using ...

The documentation for this class was generated from the following files:

- NonDLHSSingleInterval.H
- NonDLHSSingleInterval.C

8.90 NonDLocalEvidence Class Reference

Class for the Dempster-Shafer Evidence Theory methods within DAKOTA/UQ.

Inheritance diagram for NonDLocalEvidence::

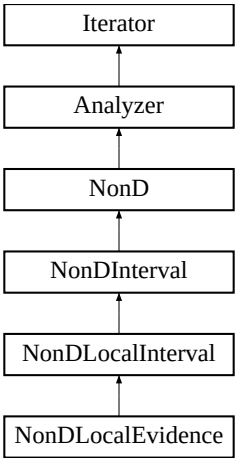

Public Member Functions

- NonDLocalEvidence (Model &model)

  constructor

- ~NonDLocalEvidence ()

  destructor

Protected Member Functions

- void initialize ()

  perform any required initialization

- void set_cell_bounds ()

  set the optimization variable bounds for each cell

- void truncate_to_cell_bounds (RealVector &initial_pt)

  truncate initial_pt to respect current cell lower/upper bounds

- void post_process_cell_results (bool minimize)

  post-process a cell minimization/maximization result

- void post_process_response_fn_results ()

post-process the interval computed for a response function

- void post_process_final_results ()

  perform final post-processing

8.90.1 Detailed Description

Class for the Dempster-Shafer Evidence Theory methods within DAKOTA/UQ.

The NonDEvidence class implements the propagation of epistemic uncertainty using Dempster-Shafer theory of evidence. In this approach, one assigns a set of basic probability assignments (BPA) to intervals defined for the uncertain variables. Input interval combinations are calculated, along with their BPA. Currently, the response function is evaluated at a set of sample points, then a response surface is constructed which is sampled extensively to find the minimum and maximum within each input interval cell, corresponding to the belief and plausibility within that cell, respectively. This data is then aggregated to calculate cumulative distribution functions for belief and plausibility.

The documentation for this class was generated from the following files:

- NonDLocalEvidence.H
- NonDLocalEvidence.C

8.91 NonDLocalInterval Class Reference

calculate interval bounds for epistemic uncertainty quantification

Inheritance diagram for NonDLocalInterval::

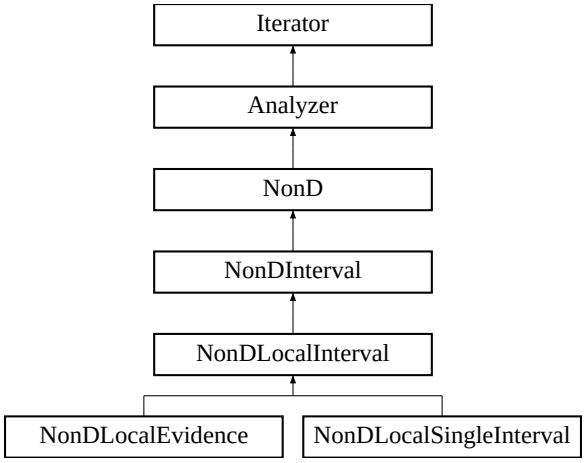

Public Member Functions

- NonDLocalInterval (Model &model)

  constructor

- ~NonDLocalInterval ()

  destructor

- void quantify_uncertainty ()

  entire function or interval bounds on a particular statistical estimator

- String uses_method () const

  return name of active optimizer method

- void method_recourse ()

  perform an MPP optimizer method switch due to a detected conflict

Protected Member Functions

- virtual void initialize ()

  perform any required initialization

- virtual void set_cell_bounds ()

set the optimization variable bounds for each cell

- virtual void truncate_to_cell_bounds (RealVector &initial_pt)

  truncate initial_pt to respect current cell lower/upper bounds

- virtual void post_process_cell_results (bool minimize)

  post-process a cell minimization/maximization result

- virtual void post_process_response_fn_results ()

  post-process the interval computed for a response function

- virtual void post_process_final_results ()

  perform final post-processing

Protected Attributes

- Iterator minMaxOptimizer

  local gradient-based optimizer

- Model minMaxModel

  recast model with sign flip for maximizing

Static Private Member Functions

- static void objective_min (const Variables &sub_model_vars, const Variables &recast_vars, const Response &sub_model_response, Response &recast_response)

  the interval lower bound

- static void objective_max (const Variables &sub_model_vars, const Variables &recast_vars, const Response &sub_model_response, Response &recast_response)

  the interval upper bound

Private Attributes

- bool npsolFlag

  selection (NPSOL SQP or OPT++ NIP)

Static Private Attributes

- static NonDLocalInterval * nondLIInstance

  functions in order to avoid the need for static data

8.91.1 Detailed Description

calculate interval bounds for epistemic uncertainty quantification

The NonDLocalInterval class supports local gradient-based optimization apporaches to determining interval bounds for epistemic UQ. The interval bounds may be on the entire function in the case of pure interval analysis (e.g. intervals on input = intervals on output), or the intervals may be on statistics of an "inner loop" aleatory analysis such as intervals on means, variances, or percentile levels.

The documentation for this class was generated from the following files:

- NonDLocalInterval.H
- NonDLocalInterval.C

8.92 NonDLocalReliability Class Reference

Class for the reliability methods within DAKOTA/UQ.

Inheritance diagram for NonDLocalReliability::

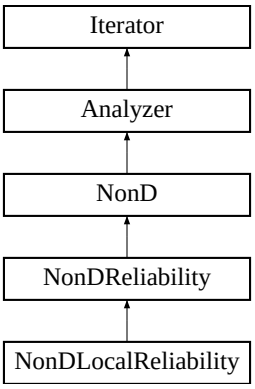

Public Member Functions

- NonDLocalReliability (Model &model)

  constructor

- ~NonDLocalReliability ()

  destructor

- void quantify_uncertainty ()

  approximations of the cumulative distribution function of response

- void print_results (std::ostream &s)

  MPP-search-based reliability methods.

- String uses_method () const

  return name of active MPP optimizer

- void method_recourse ()

  perform an MPP optimizer method switch due to a detected conflict

Private Member Functions

- void initial_taylor_series ()

  Taylor-series approximation.

- void mean_value ()

computation of approximate statistics and importance factors

- void mpp_search ()
  employ a search for the most probable point (AMV, AMV+, FORM, SORM)
- void initialize_class_data ()
  convenience function for initializing class scope arrays
- void initialize_level_data ()
  data for each response function prior to level 0
- void initialize_mpp_search_data ()
  data for each z/p/beta level for each response function
- void update_mpp_search_data (const Variables &vars_star, const Response &resp_star)
  z/p/beta level for each response function
- void update_level_data ()
  statistics following MPP convergence
- void update_pma_reliability_level ()
  generalized reliabilities by inverting second-order integrations
- void update_limit_state_surrogate ()
  to the data fit embedded within uSpaceModel
- void assign_mean_data ()
  from ranVarMeansX/U, fnValsMeanX, fnGradsMeanX, and fnHessiansMeanX
- void dg_ds_eval (const RealVector &x_vars, const RealVector &fn_grad_x, RealVector &final_stat_grad)
  convenience function for evaluating dg/ds
- Real probability (const Real &beta, bool cdf_flag)
  second-order integration
- Real reliability (const Real &p, bool cdf_flag)
  second-order integration
- bool reliability_residual (const Real &p, const Real &beta, const RealVector &kappa, Real &res)
  corrections using Newton's method (called by reliability(p))
- Real reliability_residual_derivative (const Real &p, const Real &beta, const RealVector &kappa)
  probability corrections using Newton's method (called by reliability(p))
- void principal_curvatures ()
  Compute the kappaU vector of principal curvatures from fnHessU.

Private Attributes

- RealVector meanStats

  means of response functions (calculated in initial_taylor_series())

- RealVector stdDevStats

  initial_taylor_series())

- RealVector fnGradX

  evaluation

- RealVector fnGradU

  Jacobian dx/du.

- RealSymMatrix fnHessX

  evaluation

- RealSymMatrix fnHessU

  Jacobian dx/du.

- RealVector kappaU

  transformation of fnHessU

- RealVector fnValsMeanX

  response function values evaluated at mean x

- RealMatrix fnGradsMeanX

  response function gradients evaluated at mean x

- RealSymMatrixArray fnHessiansMeanX

  response function Hessians evaluated at mean x

- RealVector ranVarMeansU

  vector of means for all uncertain random variables in u-space

- RealVector initialPtU

  initial guess for MPP search in u-space

- RealVector mostProbPointX

  location of MPP in x-space

- RealVector mostProbPointU

  location of MPP in u-space

- RealVectorArray prevMPPULev0

  initialPtU within RBDO.

- RealMatrix prevFnGradDLev0

  for level 0. Used for warm-starting initialPtU within RBDO.

- RealMatrix prevFnGradULev0

  for level 0. Used for warm-starting initialPtU within RBDO.

- RealVector prevICVars

  previous design vector. Used for warm-starting initialPtU within RBDO.

- ShortArray prevCumASVLev0

  for warm-starting initialPtU within RBDO.

- bool npsolFlag

  selection (NPSOL SQP or OPT++ NIP)

- bool warmStartFlag

  flag indicating the use of warm starts

- bool nipModeOverrideFlag

  flag indicating the use of move overrides within OPT++ NIP

- bool curvatureDataAvailable

  mostProbPointU) is available for computing principal curvatures

- short integrationOrder

  integration order (1 or 2) provided by `integration` *specification*

- short secondOrderIntType

  type of second-order integration: Breitung, Hohenbichler-Rackwitz, or Hong

- Real curvatureThresh

  cut-off value for 1/sqrt() term in second-order probability corrections.

- short taylorOrder

  derived from hessianType

- RealMatrix impFactor

  importance factors predicted by MV

- int npsolDerivLevel

  fn, 2 = analytic grads of constraints, 3 = analytic grads of both).

- unsigned short warningBits

  set of warnings accumulated during execution

8.92.1 Detailed Description

Class for the reliability methods within DAKOTA/UQ.

The NonDLocalReliability class implements the following reliability methods through the support of different limit state approximation and integration options: mean value (MVFOSM/MVSOSM), advanced mean value method (AMV, AMV^2) in x- or u-space, iterated advanced mean value method (AMV+, AMV^2+) in x- or u-space, two-point adaptive nonlinearity approximation (TANA) in x- or u-space, first order reliability method (FORM), and second order reliability method (SORM). All options except mean value employ an optimizer (currently NPSOL SQP or OPT++ NIP) to solve an equality-constrained optimization problem for the most probable point (MPP). The MPP search may be formulated as the reliability index approach (RIA) for mapping response levels to reliabilities/probabilities or as the performance measure approach (PMA) for performing the inverse mapping of reliability/probability levels to response levels.

8.92.2 Member Function Documentation

8.92.2.1 void initial_taylor_series () [private]

Taylor-series approximation.

An initial first- or second-order Taylor-series approximation is required for MV/AMV/AMV+/TANA or for the case where meanStats or stdDevStats (from MV) are required within finalStatistics for subIterator usage of NonDLocalReliability.

8.92.2.2 void initialize_class_data () [private]

convenience function for initializing class scope arrays

Initialize class-scope arrays and perform other start-up activities, such as evaluating median limit state responses.

8.92.2.3 void initialize_level_data () [private]

data for each response function prior to level 0

For a particular response function prior to the first z/p/beta level, initialize/warm-start optimizer initial guess (initialPtU), expansion point (mostProbPointX/U), and associated response data (computedRespLevel, fnGradX/U, and fnHessX/U).

8.92.2.4 void initialize_mpp_search_data () [private]

data for each z/p/beta level for each response function

For a particular response function at a particular z/p/beta level, warm-start or reset the optimizer initial guess (initialPtU), expansion point (mostProbPointX/U), and associated response data (computedRespLevel, fnGradX/U, and fnHessX/U).

8.92.2.5 void update_mpp_search_data (const Variables & *vars_star*, const Response & *resp_star*) [private]

z/p/beta level for each response function

Includes case-specific logic for updating MPP search data for the AMV/AMV+/TANA/NO_APPROX methods.

8.92.2.6 void update_level_data () [private]

statistics following MPP convergence

Updates computedRespLevels/computedProbLevels/computedRelLevels, finalStatistics, warm start, and graphics data.

8.92.2.7 void update_pma_reliability_level () [private, virtual]

generalized reliabilities by inverting second-order integrations

For PMA SORM with prescribed p-level or prescribed generalized beta-level, requestedCDFRelLevel must be updated. This virtual function redefinition is called from NonDReliability::PMA_constraint_eval().

Reimplemented from NonDReliability.

8.92.2.8 void dg_ds_eval (const RealVector & *x_vars*, const RealVector & *fn_grad_x*, RealVector & *final_stat_grad*) [private]

convenience function for evaluating dg/ds

Computes dg/ds where s = design variables. Supports potentially overlapping cases of design variable augmentation and insertion.

8.92.2.9 Real probability (const Real & *beta*, bool *cdf_flag*) [private]

second-order integration

Converts beta into a probability using either first-order (FORM) or second-order (SORM) integration. The SORM calculation first calculates the principal curvatures at the MPP (using the approach in Ch. 8 of Haldar & Mahadevan), and then applies correction formulations from the literature (Breitung, Hohenbichler-Rackwitz, or Hong).

8.92.2.10 Real reliability (const Real & *p*, bool *cdf_flag*) [private]

second-order integration

Converts a probability into a reliability using the inverse of the first-order or second-order integrations implemented in NonDLocalReliability::probability().

The documentation for this class was generated from the following files:

- NonDLocalReliability.H

- NonDLocalReliability.C

8.93 NonDLocalSingleInterval Class Reference

calculate interval bounds for epistemic uncertainty quantification

Inheritance diagram for NonDLocalSingleInterval::

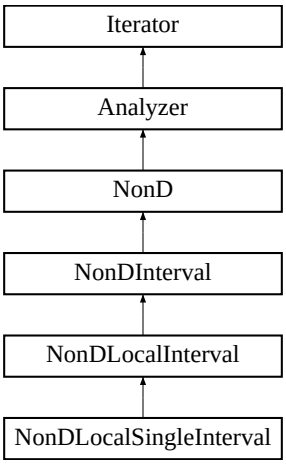

Public Member Functions

- NonDLocalSingleInterval (Model &model)

  constructor

- ~NonDLocalSingleInterval ()

  destructor

Protected Member Functions

- void initialize ()

  perform any required initialization

- void post_process_cell_results (bool minimize)

  post-process a cell minimization/maximization result

Private Attributes

- size_t statCntr

  counter for finalStatistics

8.93.1 Detailed Description

calculate interval bounds for epistemic uncertainty quantification

The NonDLocalSingleInterval class supports local gradient-based optimization apporaches to determining interval bounds for epistemic UQ. The interval bounds may be on the entire function in the case of pure interval analysis (e.g. intervals on input = intervals on output), or the intervals may be on statistics of an "inner loop" aleatory analysis such as intervals on means, variances, or percentile levels.

The documentation for this class was generated from the following files:

- NonDLocalSingleInterval.H
- NonDLocalSingleInterval.C

8.94 NonDPolynomialChaos Class Reference

quantification

Inheritance diagram for NonDPolynomialChaos::

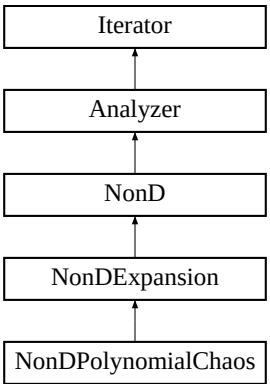

Public Member Functions

- NonDPolynomialChaos (Model &model)

  constructor

- ~NonDPolynomialChaos ()

  destructor

- void initialize_expansion ()

  initialize random variable definitions and final stats arrays

- void compute_expansion ()

  form or import an orthogonal polynomial expansion using PCE methods

- void print_coefficients (std::ostream &s)

  print the PCE coefficient array for the orthogonal basis

- void print_moments (std::ostream &s)

  print the expansion/numerical moments

Private Attributes

- String expansionImportFile

  filename for import of chaos coefficients

- int expansionTerms

user specification of PCE terms

- RealMatrix pceGradsMeanX

  evaluated at the means (used as uncertainty importance metrics)

8.94.1 Detailed Description

quantification

The NonDPolynomialChaos class uses a polynomial chaos expansion (PCE) approach to approximate the effect of parameter uncertainties on response functions of interest. It utilizes the OrthogPolyApproximation class to manage multiple types of orthogonal polynomials within a Wiener-Askey scheme to PCE. It supports PCE coefficient estimation via sampling, quadrature, point-collocation, and file import.

The documentation for this class was generated from the following files:

- NonDPolynomialChaos.H
- NonDPolynomialChaos.C

8.95 NonDQuadrature Class Reference

normals/uniforms/exponentials/betas/gammas.

Inheritance diagram for NonDQuadrature::

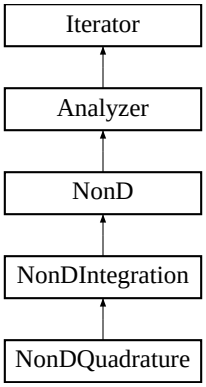

Public Member Functions

- NonDQuadrature (Model &model, const Pecos::ShortArray &u_types, const UShortArray &order, bool nested_rules=false)
- const Pecos::UShortArray & quadrature_order () const

  return quadOrder

Protected Member Functions

- NonDQuadrature (Model &model)

  constructor

- ~NonDQuadrature ()

  destructor

- void get_parameter_sets (Model &model)

  Returns one block of samples (ndim ∗ num_samples).

- void reset ()

  restore initial state for repeated sub-iterator executions

- void sampling_reset (int min_samples, bool all_data_flag, bool stats_flag)
- void increment_grid ()

  increment SSG level/TPQ order

- void increment_grid (const RealVector &dim_pref)

increment SSG level/TPQ order and update anisotropy

Private Member Functions

- void anisotropic_preference (const RealVector &dim_pref)

  update quadOrder based on an updated dimension preference

- void check_integration (const UShortArray &quad_order_spec)

  verify self-consistency of integration specification

- void nested_quadrature_order (const UShortArray &quad_order_ref)

  update quadOrder from quadOrderRef to account for nested rule constraints

- size_t reference_grid_size ()

  return Product_i(quadOrderRef[i])

- void increment_reference ()

  increment each quadOrderRef entry by 1

- void increment_reference (const RealVector &dim_pref)

  increment the quadOrderRef entry with maximum preference by 1

Private Attributes

- Pecos::TensorProductDriver * tpqDriver

  convenience pointer to the numIntDriver representation

- bool nestedRules

  quadrature rules such as Gauss-Patterson

- UShortArray quadOrderSpec

  the user specification for the number of Gauss points per dimension

- UShortArray quadOrderRef

  any refinements posted by increment_grid()

8.95.1 Detailed Description

normals/uniforms/exponentials/betas/gammas.

This class is used by NonDPolynomialChaos, but could also be used for general numerical integration of moments. It employs Gauss-Hermite, Gauss-Legendre, Gauss-Laguerre, Gauss-Jacobi and generalized Gauss-Laguerre quadrature for use with normal, uniform, exponential, beta, and gamma density functions and integration bounds. The abscissas and weights for one-dimensional integration are extracted from the appropriate OrthogonalPolynomial class and are extended to n-dimensions using a tensor product approach.

8.95.2 Constructor & Destructor Documentation

8.95.2.1 NonDQuadrature (Model & *model*, const Pecos::ShortArray & *u_types*, const UShortArray & *order*, bool *nested_rules* = `false`)

This alternate constructor is used for on-the-fly generation and evaluation of numerical quadrature points.

8.95.2.2 NonDQuadrature (Model & *model*) `[protected]`

constructor

This constructor is called for a standard letter-envelope iterator instantiation. In this case, set_db_list_nodes has been called and probDescDB can be queried for settings from the method specification. It is not currently used, as there is not yet a separate nond_quadrature method specification.

8.95.3 Member Function Documentation

8.95.3.1 void sampling_reset (int *min_samples*, bool *all_data_flag*, bool *stats_flag*) `[protected, virtual]`

used by DataFitSurrModel::build_global() to publish the minimum number of points needed from the quadrature routine in order to build a particular global approximation.

Reimplemented from Iterator.

The documentation for this class was generated from the following files:

- NonDQuadrature.H
- NonDQuadrature.C

8.96 NonDQUESOBayesCalibration Class Reference

Bayesian inference using the QUESO library from UT Austin.

Inheritance diagram for NonDQUESOBayesCalibration::

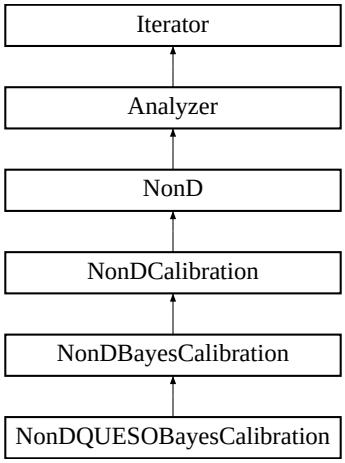

Public Member Functions

- NonDQUESOBayesCalibration (Model &model)

  standard constructor

- ~NonDQUESOBayesCalibration ()

  destructor

Protected Member Functions

- void quantify_uncertainty ()

  redefined from DakotaNonD

- Real actualValue (...)

  redefined from QUESO::

- Real lnValue (...)

  redefined from QUESO::

8.96.1 Detailed Description

Bayesian inference using the QUESO library from UT Austin.

This class ...

8.96.2 Constructor & Destructor Documentation

8.96.2.1 NonDQUESOBayesCalibration (Model & *model*)

standard constructor

This constructor is called for a standard letter-envelope iterator instantiation. In this case, set_db_list_nodes has been called and probDescDB can be queried for settings from the method specification.

8.96.3 Member Function Documentation

8.96.3.1 void quantify_uncertainty () `[protected, virtual]`

redefined from DakotaNonD

Perform the uncertainty quantification

Implements NonD.

The documentation for this class was generated from the following files:

- NonDQUESOBayesCalibration.H
- NonDQUESOBayesCalibration.C

8.97 NonDReliability Class Reference

Base class for the reliability methods within DAKOTA/UQ.

Inheritance diagram for NonDReliability::

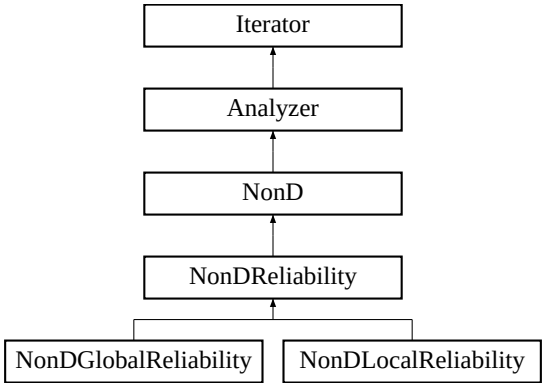

Protected Member Functions

- NonDReliability (Model &model)

  constructor

- ~NonDReliability ()

  destructor

- void initialize_graphics (bool graph_2d, bool tabular_data, const String &tabular_file)

  initialize graphics customized for reliability methods

- virtual void update_pma_reliability_level ()

  update requestedCDFRelLevel for use in PMA_constraint_eval()

Static Protected Member Functions

- static void RIA_objective_eval (const Variables &sub_model_vars, const Variables &recast_vars, const Response &sub_model_response, Response &recast_response)

  (MPP) with the objective function of (norm u)^2.

- static void RIA_constraint_eval (const Variables &sub_model_vars, const Variables &recast_vars, const Response &sub_model_response, Response &recast_response)

  (MPP) with the constraint of G(u) = response level.

- static void PMA_objective_eval (const Variables &sub_model_vars, const Variables &recast_vars, const Response &sub_model_response, Response &recast_response)

(MPP) with the objective function of G(u).

- static void PMA_constraint_eval (const Variables &sub_model_vars, const Variables &recast_vars, const Response &sub_model_response, Response &recast_response)

  (MPP) with the constraint of (norm u)^2 = beta^2.

- static void PMA2_set_mapping (const ActiveSet &recast_set, ActiveSet &sub_model_set)

  beta-bar constraint target update is required for second-order PMA

Protected Attributes

- Model uSpaceModel

  recastings and data fits

- Model mppModel

  RecastModel which formulates the optimization subproblem: RIA, PMA, EGO.

- Iterator mppOptimizer

  Iterator which optimizes the mppModel.

- short mppSearchType

  x/u-space TANA, x/u-space EGO, or NO_APPROX

- Iterator importanceSampler

  importance sampling instance used to compute/refine probabilities

- short integrationRefinement

  provided by `refinement` *specification*

- size_t numRelAnalyses

  number of invocations of quantify_uncertainty()

- size_t approxIters

  number of approximation cycles for the current respFnCount/levelCount

- bool approxConverged

  indicates convergence of approximation-based iterations

- int respFnCount

  counter for which response function is being analyzed

- size_t levelCount

  counter for which response/probability level is being analyzed

- size_t statCount

counter for which final statistic is being computed

- Real requestedRespLevel

  the response level target for the current response function

- Real requestedCDFProbLevel

  the CDF probability level target for the current response function

- Real requestedCDFRelLevel

  the CDF reliability level target for the current response function

- Real computedRespLevel

  output response level calculated

- Real computedRelLevel

  output reliability level calculated

Static Protected Attributes

- static NonDReliability * nondRelInstance

  functions in order to avoid the need for static data

8.97.1 Detailed Description

Base class for the reliability methods within DAKOTA/UQ.

The NonDReliability class provides a base class for NonDLocalReliability, which implements traditional MPP-based reliability methods, and NonDGlobalReliability, which implements global limit state search using Gaussian process models in combination with multimodal importance sampling.

8.97.2 Member Function Documentation

8.97.2.1 void RIA_objective_eval (const Variables & *sub_model_vars*, const Variables & *recast_vars*, const Response & *sub_model_response*, Response & *recast_response*) [static, protected]

(MPP) with the objective function of (norm u)^2.

This function recasts a G(u) response set (already transformed and approximated in other recursions) into an RIA objective function.

8.97.2.2 void RIA_constraint_eval (const Variables & *sub_model_vars*, const Variables & *recast_vars*, const Response & *sub_model_response*, Response & *recast_response*) [static, protected]

(MPP) with the constraint of G(u) = response level.

This function recasts a G(u) response set (already transformed and approximated in other recursions) into an RIA equality constraint.

8.97.2.3 void PMA_objective_eval (const Variables & *sub_model_vars*, const Variables & *recast_vars*, const Response & *sub_model_response*, Response & *recast_response*) [static, protected]

(MPP) with the objective function of G(u).

This function recasts a G(u) response set (already transformed and approximated in other recursions) into an PMA objective function.

8.97.2.4 void PMA_constraint_eval (const Variables & *sub_model_vars*, const Variables & *recast_vars*, const Response & *sub_model_response*, Response & *recast_response*) [static, protected]

(MPP) with the constraint of (norm u)^2 = beta^2.

This function recasts a G(u) response set (already transformed and approximated in other recursions) into a PMA equality constraint.

The documentation for this class was generated from the following files:

- NonDReliability.H
- NonDReliability.C

8.98 NonDSampling Class Reference

NonDIncremLHSSampling, and NonDAdaptImpSampling.

Inheritance diagram for NonDSampling::

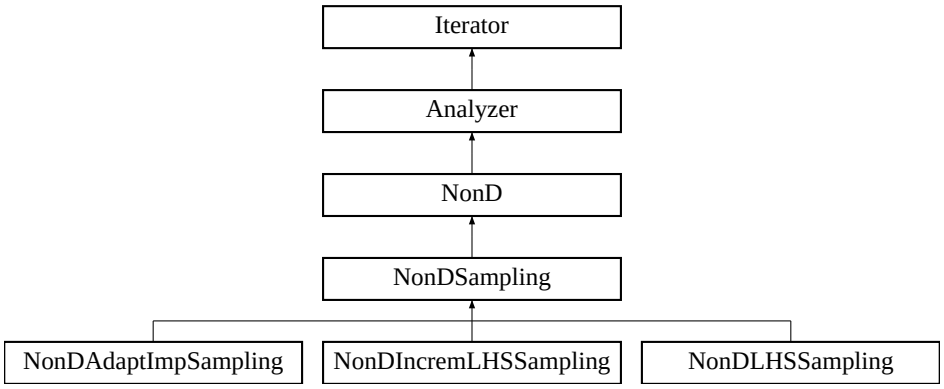

Public Member Functions

- void moments (const RealVector &means, const RealVector &std_devs)

  set meanStats and stdDevStats

- void compute_distribution_mappings (const ResponseArray &samples)

  z to p/beta and of p/beta to z

- void update_final_statistics ()

  and computedProbLevels/computedRelLevels/computedRespLevels

Protected Member Functions

- NonDSampling (Model &model)

  constructor

- NonDSampling (NoDBBaseConstructor, Model &model, const String &sample_type, int samples, int seed, const String &rng)

  alternate constructor for sample generation and evaluation "on the fly"

- NonDSampling (NoDBBaseConstructor, const String &sample_type, int samples, int seed, const String &rng, const RealVector &lower_bnds, const RealVector &upper_bnds)

  alternate constructor for sample generation "on the fly"

- ~NonDSampling ()

  destructor

- int num_samples () const
  get the current number of samples
- void sampling_reset (int min_samples, bool all_data_flag, bool stats_flag)
  resets number of samples and sampling flags
- const String & sampling_scheme () const
  return sampleType: "lhs" or "random"
- void vary_pattern (bool pattern_flag)
  set varyPattern
- void get_parameter_sets (Model &model)
  distributions/bounds defined in the incoming model.
- void get_parameter_sets (const RealVector &lower_bnds, const RealVector &upper_bnds)
  lower_bnds/upper_bnds.
- void update_model_from_sample (Model &model, const Real ∗sample_vars)
  Override default update of continuous vars only.
- void initialize_lhs (bool write_message)
  increments numLHSRuns, sets random seed, and initializes lhsDriver
- void compute_statistics (const RealMatrix &vars_samples, const ResponseArray &resp_samples)
  or intervals (epsitemic or mixed uncertainties)
- void compute_intervals (const ResponseArray &samples)
  called by compute_statistics() to calculate min/max intervals
- void compute_moments (const ResponseArray &samples)
  deviations, and confidence intervals
- void print_statistics (std::ostream &s) const
  prints the statistics computed in compute_statistics()
- void print_intervals (std::ostream &s) const
  prints the intervals computed in compute_intervals()
- void print_moments (std::ostream &s) const
  prints the moments computed in compute_moments()
- void view_counts (const Model &model, size_t &cv_start, size_t &num_cv, size_t &div_start, size_t &num_div, size_t &drv_start, size_t &num_drv) const
  compute sampled subsets of all cv/div/drv from samplingVarsMode and model

Protected Attributes

- const int seedSpec

  the user seed specification (default is 0)

- int randomSeed

  the current seed

- const int samplesSpec

  initial specification of number of samples

- int numSamples

  the current number of samples to evaluate

- String rngName

  name of the random number generator

- String sampleType

  the sample type: random, lhs, or incremental_lhs

- Pecos::LHSDriver lhsDriver

  the C++ wrapper for the F90 LHS library

- bool statsFlag

  flags computation/output of statistics

- bool allDataFlag

  flags update of allResponses (allVariables or allSamples already defined)

- short samplingVarsMode

  the sampling mode: ACTIVE, ACTIVE_UNIFORM, ALL, or ALL_UNIFORM

- short sampleRanksMode

  SET_RANKS, or SET_GET_RANKS.

- bool varyPattern

  SBO/SBNLS) are not repeated, but are still repeatable.

- RealMatrix sampleRanks

  data structure to hold the sample ranks

- RealVector mean95CIDeltas

  intervals (calculated in compute_moments())

- RealVector stdDev95CILowerBnds

  (calculated in compute_moments())

- RealVector stdDev95CIUpperBnds
  (calculated in compute_moments())
- SensAnalysisGlobal nonDSampCorr
  initialize statistical post processing

Private Attributes

- size_t numLHSRuns
  counter for number of executions of get_parameter_sets() for this object
- RealVector meanStats
  means of response functions (calculated in compute_moments())
- RealVector stdDevStats
  std deviations of response functions (calculated in compute_moments())
- RealVector skewnessStats
  skewness of response functions (calculated in compute_moments())
- RealVector kurtosisStats
  kurtosis of response functions (calculated in compute_moments())
- RealVector minValues
  (calculated in compute_intervals())
- RealVector maxValues
  (calculated in compute_intervals())

8.98.1 Detailed Description

NonDIncremLHSSampling, and NonDAdaptImpSampling.

This base class provides common code for sampling methods which employ the Latin Hypercube Sampling (LHS) package from Sandia Albuquerque's Risk and Reliability organization. NonDSampling now exclusively utilizes the 1998 Fortran 90 LHS version as documented in SAND98-0210, which was converted to a UNIX link library in 2001. The 1970's vintage LHS (that had been f2c'd and converted to incomplete classes) has been removed.

8.98.2 Constructor & Destructor Documentation

8.98.2.1 NonDSampling (Model & *model*) [protected]

constructor

This constructor is called for a standard letter-envelope iterator instantiation. In this case, set_db_list_nodes has been called and probDescDB can be queried for settings from the method specification.

8.98.2.2 NonDSampling (NoDBBaseConstructor, Model & *model*, const String & *sample_type*, int *samples*, int *seed*, const String & *rng*) [protected]

alternate constructor for sample generation and evaluation "on the fly"

This alternate constructor is used for generation and evaluation of on-the-fly sample sets.

8.98.2.3 NonDSampling (NoDBBaseConstructor, const String & *sample_type*, int *samples*, int *seed*, const String & *rng*, const RealVector & *lower_bnds*, const RealVector & *upper_bnds*) [protected]

alternate constructor for sample generation "on the fly"

This alternate constructor is used by ConcurrentStrategy for generation of uniform, uncorrelated sample sets.

8.98.3 Member Function Documentation

8.98.3.1 int num_samples () const [inline, protected, virtual]

get the current number of samples

Return current number of evaluation points. Since the calculation of samples, collocation points, etc. might be costly, provide a default implementation here that backs out from the maxConcurrency. May be (is) overridden by derived classes.

Reimplemented from Iterator.

8.98.3.2 void sampling_reset (int *min_samples*, bool *all_data_flag*, bool *stats_flag*) [inline, protected, virtual]

resets number of samples and sampling flags

used by DataFitSurrModel::build_global() to publish the minimum number of samples needed from the sampling routine (to build a particular global approximation) and to set allDataFlag and statsFlag. In this case, allDataFlag is set to true (vectors of variable and response sets must be returned to build the global approximation) and statsFlag is set to false (statistics computations are not needed).

Reimplemented from Iterator.

8.98.3.3 void get_parameter_sets (Model & *model*) [protected, virtual]

distributions/bounds defined in the incoming model.

This version of get_parameter_sets() extracts data from the user-defined model in any of the four sampling modes.

Reimplemented from Analyzer.

8.98.3.4 void get_parameter_sets (const RealVector & *lower_bnds*, const RealVector & *upper_bnds*) [protected]

lower_bnds/upper_bnds.

This version of get_parameter_sets() does not extract data from the user-defined model, but instead relies on the incoming bounded region definition. It only support a UNIFORM sampling mode, where the distinction of ACTIVE_UNIFORM vs. ALL_UNIFORM is handled elsewhere.

The documentation for this class was generated from the following files:

- NonDSampling.H
- NonDSampling.C

8.99 NonDSparseGrid Class Reference

integrals over independent standard random variables.

Inheritance diagram for NonDSparseGrid::

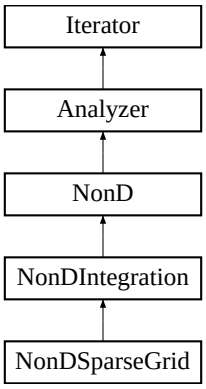

Public Member Functions

- NonDSparseGrid (Model &model, const Pecos::ShortArray &u_types, unsigned short ssg_level, const RealVector &dim_pref, short refine_type=Pecos::NO_REFINEMENT, short refine_control=Pecos::GENERALIZED_SPARSE, bool track_ensemble_wts=true, bool nested_rules=true)
- void increment_grid ()

  increment ssgDriver::ssgLevel

- void increment_grid (const RealVector &dim_pref)

  update ssgDriver::ssgLevel and ssgDriver::ssgAnisoLevelWts

- const std::set< UShortArray > & active_multi_index () const

  returns SparseGridDriver::active_multi_index()

- const std::set< UShortArray > & old_multi_index () const

  returns SparseGridDriver::old_multi_index()

- const UShort2DArray & smolyak_multi_index () const

  returns SparseGridDriver::smolyak_multi_index()

- const IntArray & smolyak_coefficients () const

  returns SparseGridDriver::smolyak_coefficients()

- void initialize_sets ()

  invokes SparseGridDriver::initialize_sets()

- void update_reference ()

invokes SparseGridDriver::update_reference()

- void increment_set (const UShortArray &set)

  invokes SparseGridDriver::push_trial_set()

- void restore_set ()

  invokes SparseGridDriver::restore_set()

- void evaluate_set ()

  invokes SparseGridDriver::compute_trial_grid()

- void decrement_set ()

  invokes SparseGridDriver::pop_trial_set()

- void update_sets (const UShortArray &set_star)

  invokes SparseGridDriver::update_sets()

- void finalize_sets ()

  invokes SparseGridDriver::finalize_sets()

Protected Member Functions

- NonDSparseGrid (Model &model)

  constructor

- ~NonDSparseGrid ()

  destructor

- void get_parameter_sets (Model &model)

  Returns one block of samples (ndim ∗ num_samples).

- void reset ()

  restore initial state for repeated sub-iterator executions

- void sampling_reset (int min_samples, bool all_data_flag, bool stats_flag)

Private Attributes

- Pecos::SparseGridDriver ∗ ssgDriver

  convenience pointer to the numIntDriver representation

- unsigned short ssgLevelSpec

  the user specification for the Smolyak sparse grid level

- RealVector dimPrefSpec

  the user specification for anisotropic dimension preference

- unsigned short ssgLevelRef

  maintained within ssgDriver

8.99.1 Detailed Description

integrals over independent standard random variables.

This class is used by NonDPolynomialChaos and NonDStochCollocation, but could also be used for general numerical integration of moments. It employs 1-D Clenshaw-Curtis and Gaussian quadrature rules within Smolyak sparse grids.

8.99.2 Constructor & Destructor Documentation

8.99.2.1 NonDSparseGrid (Model & *model*, const Pecos::ShortArray & *u_types*, unsigned short *ssg_level*, const RealVector & *dim_pref*, short *refine_type* = `Pecos::NO_REFINEMENT`, short *refine_control* = `Pecos::GENERALIZED_SPARSE`, bool *track_ensemble_wts* = `true`, bool *nested_rules* = `true`)

This alternate constructor is used for on-the-fly generation and evaluation of sparse grids within PCE and SC.

8.99.2.2 NonDSparseGrid (Model & *model*) `[protected]`

constructor

This constructor is called for a standard letter-envelope iterator instantiation. In this case, set_db_list_nodes has been called and probDescDB can be queried for settings from the method specification. It is not currently used, as there is not a separate sparse_grid method specification.

8.99.3 Member Function Documentation

8.99.3.1 void sampling_reset (int *min_samples*, bool *all_data_flag*, bool *stats_flag*) `[protected, virtual]`

used by DataFitSurrModel::build_global() to publish the minimum number of points needed from the sparse grid routine in order to build a particular global approximation.

Reimplemented from Iterator.

The documentation for this class was generated from the following files:

- NonDSparseGrid.H
- NonDSparseGrid.C

8.100 NonDStochCollocation Class Reference

quantification

Inheritance diagram for NonDStochCollocation::

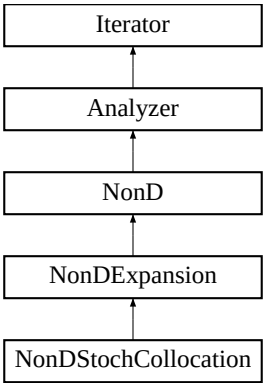

Public Member Functions

- NonDStochCollocation (Model &model)

  constructor

- ~NonDStochCollocation ()

  destructor

- void print_moments (std::ostream &s)

  print the numerical moments

8.100.1 Detailed Description

quantification

The NonDStochCollocation class uses a stochastic collocation (SC) approach to approximate the effect of parameter uncertainties on response functions of interest. It utilizes the InterpPolyApproximation class to manage multidimensional Lagrange polynomial interpolants.

The documentation for this class was generated from the following files:

- NonDStochCollocation.H
- NonDStochCollocation.C

8.101 NPSOLOptimizer Class Reference

Wrapper class for the NPSOL optimization library.

Inheritance diagram for NPSOLOptimizer::

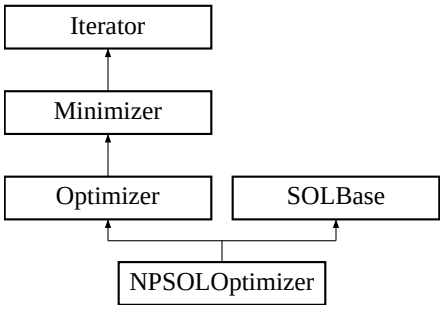

Public Member Functions

- NPSOLOptimizer (Model &model)

  standard constructor

- NPSOLOptimizer (NoDBBaseConstructor, Model &model)

  alternate constructor for Iterator instantiations by name

- NPSOLOptimizer (Model &model, const int &derivative_level, const Real &conv_tol)

  alternate constructor for instantiations "on the fly"

- NPSOLOptimizer (const RealVector &initial_point, const RealVector &var_lower_bnds, const RealVector &var_upper_bnds, const RealMatrix &lin_ineq_coeffs, const RealVector &lin_ineq_lower_bnds, const RealVector &lin_ineq_upper_bnds, const RealMatrix &lin_eq_coeffs, const RealVector &lin_eq_targets, const RealVector &nonlin_ineq_lower_bnds, const RealVector &nonlin_ineq_upper_bnds, const RealVector &nonlin_eq_targets, void(∗user_obj_eval)(int &, int &, double ∗, double &, double ∗, int &), void(∗user_con_eval)(int &, int &, int &, int &, int ∗, double ∗, double ∗, double ∗, int &), const int &derivative_level, const Real &conv_tol)

  alternate constructor for instantiations "on the fly"

- ∼NPSOLOptimizer ()

  destructor

- void find_optimum ()

  Redefines the run virtual function for the optimizer branch.

Private Member Functions

- void find_optimum_on_model ()

called by find_optimum for setUpType == "model"

- void find_optimum_on_user_functions ()

  called by find_optimum for setUpType == "user_functions"

Static Private Member Functions

- static void objective_eval (int &mode, int &n, double ∗x, double &f, double ∗gradf, int &nstate)

  objective function (passed by function pointer to NPSOL).

Private Attributes

- String setUpType

  NonDReliability currently uses the user_functions mode.

- RealVector initialPoint

  holds initial point passed in for "user_functions" mode.

- RealVector lowerBounds

  holds variable lower bounds passed in for "user_functions" mode.

- RealVector upperBounds

  holds variable upper bounds passed in for "user_functions" mode.

- void(∗ userObjectiveEval)(int &, int &, double ∗, double &, double ∗, int &)

  "user_functions" mode.

- void(∗ userConstraintEval)(int &, int &, int &, int &, int ∗, double ∗, double ∗, double ∗, int &)

  "user_functions" mode.

Static Private Attributes

- static NPSOLOptimizer ∗ npsolInstance

  functions in order to avoid the need for static data

8.101.1 Detailed Description

Wrapper class for the NPSOL optimization library.

The NPSOLOptimizer class provides a wrapper for NPSOL, a Fortran 77 sequential quadratic programming library from Stanford University marketed by Stanford Business Associates. It uses a function pointer approach

for which passed functions must be either global functions or static member functions. Any attribute used within static member functions must be either local to that function or accessed through a static pointer.

The user input mappings are as follows: `max_function_evaluations` is implemented directly in NPSOLOptimizer's evaluator functions since there is no NPSOL parameter equivalent, and `max_iterations`, `convergence_tolerance`, `output` verbosity, `verify_level`, `function_precision`, and `linesearch_tolerance` are mapped into NPSOL's "Major Iteration Limit", "Optimality Tolerance", "Major Print Level" (`verbose:` Major Print Level = 20; `quiet:` Major Print Level = 10), "Verify Level", "Function Precision", and "Linesearch Tolerance" parameters, respectively, using NPSOL's npoptn() subroutine (as wrapped by npoptn2() from the npoptn_wrapper.f file). Refer to [Gill, P.E., Murray, W., Saunders, M.A., and Wright, M.H., 1986] for information on NPSOL's optional input parameters and the npoptn() subroutine.

8.101.2 Constructor & Destructor Documentation

8.101.2.1 NPSOLOptimizer (Model & *model*)

standard constructor

This is the primary constructor. It accepts a Model reference.

8.101.2.2 NPSOLOptimizer (NoDBBaseConstructor, Model & *model*)

alternate constructor for Iterator instantiations by name

This is an alternate constructor which accepts a Model but does not have a supporting method specification from the ProblemDescDB.

8.101.2.3 NPSOLOptimizer (Model & *model*, const int & *derivative_level*, const Real & *conv_tol*)

alternate constructor for instantiations "on the fly"

This is an alternate constructor for instantiations on the fly using a Model but no ProblemDescDB.

8.101.2.4 NPSOLOptimizer (const RealVector & *initial_point*, const RealVector & *var_lower_bnds*, const RealVector & *var_upper_bnds*, const RealMatrix & *lin_ineq_coeffs*, const RealVector & *lin_ineq_lower_bnds*, const RealVector & *lin_ineq_upper_bnds*, const RealMatrix & *lin_eq_coeffs*, const RealVector & *lin_eq_targets*, const RealVector & *nonlin_ineq_lower_bnds*, const RealVector & *nonlin_ineq_upper_bnds*, const RealVector & *nonlin_eq_targets*, void(∗)(int &, int &, double ∗, double &, double ∗, int &) *user_obj_eval*, void(∗)(int &, int &, int &, int &, int ∗, double ∗, double ∗, double ∗, int &) *user_con_eval*, const int & *derivative_level*, const Real & *conv_tol*)

alternate constructor for instantiations "on the fly"

This is an alternate constructor for performing an optimization using the passed in objective function and constraint function pointers.

The documentation for this class was generated from the following files:

- NPSOLOptimizer.H

- NPSOLOptimizer.C

8.102 Optimizer Class Reference

Base class for the optimizer branch of the iterator hierarchy.

Inheritance diagram for Optimizer::

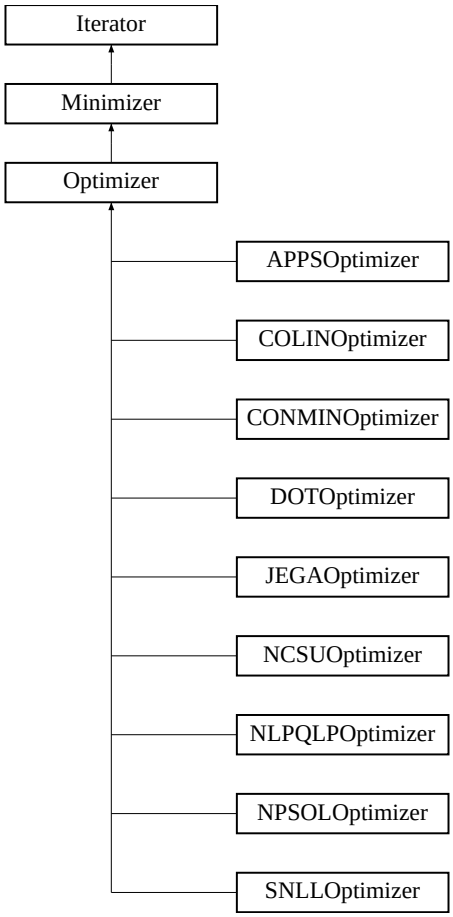

Protected Member Functions

- Optimizer ()

  default constructor

- Optimizer (Model &model)

  standard constructor

- Optimizer (NoDBBaseConstructor, Model &model)

  alternate constructor for "on the fly" instantiations

- Optimizer (NoDBBaseConstructor, size_t num_cv, size_t num_div, size_t num_drv, size_t num_lin_ineq, size_t num_lin_eq, size_t num_nln_ineq, size_t num_nln_eq)

  alternate constructor for "on the fly" instantiations

- ~Optimizer ()

  destructor

- void initialize_run ()
- void run ()

  and may include pre/post steps in lieu of separate pre/post

- void post_run (std::ostream &s)
- void finalize_run ()

  deallocation and resetting of instance pointers

- void print_results (std::ostream &s)
- virtual void find_optimum ()=0

  Redefines the run virtual function for the optimizer branch.

Protected Attributes

- size_t numObjectiveFns

  number of objective functions (iterator view)

- size_t numUserObjectiveFns

  number of objective functions (user's model view)

- bool multiObjFlag

  flag indicating whether multi-objective transformations are necessary

- Optimizer * prevOptInstance

  pointer containing previous value of optimizerInstance

Static Protected Attributes

- static Optimizer * optimizerInstance

  pointer to Optimizer instance used in static member functions

Private Member Functions

- void weighted_sum (const Response &full_response, Response &reduced_response, const RealVector &wts) const

  weighted objective for single-objective optimizers

- void multi_objective_retrieve (const Variables &vars, Response &response) const

  from the solution of a single-objective optimizer

Static Private Member Functions

- static void primary_resp_recast (const Variables &native_vars, const Variables &scaled_vars, const Response &native_response, Response &scaled_response)

  from native (user) to iterator space

8.102.1 Detailed Description

Base class for the optimizer branch of the iterator hierarchy.

The Optimizer class provides common data and functionality for DOTOptimizer, CONMINOptimizer, NPSOLOptimizer, SNLLOptimizer, NLPQLPOptimizer, COLINOptimizer, and JEGAOptimizer.

8.102.2 Constructor & Destructor Documentation

8.102.2.1 Optimizer (Model & *model*) [protected]

standard constructor

This constructor extracts the inherited data for the optimizer branch and performs sanity checking on gradient and constraint settings.

8.102.3 Member Function Documentation

8.102.3.1 void initialize_run () [protected, virtual]

Implements portions of initialize_run specific to Optimizers. This function should be invoked (or reimplemented) by any derived implementations of initialize_run() (which would otherwise hide it).

Reimplemented from Minimizer.

Reimplemented in CONMINOptimizer, DOTOptimizer, NLPQLPOptimizer, and SNLLOptimizer.

8.102.3.2 void run () [inline, protected, virtual]

and may include pre/post steps in lieu of separate pre/post

Virtual run function for the iterator class hierarchy. All derived classes need to redefine it.

Reimplemented from Iterator.

8.102.3.3 void post_run (std::ostream & *s*) [protected, virtual]

Implements portions of post_run specific to Optimizers. This function should be invoked (or reimplemented) by any derived implementations of post_run() (which would otherwise hide it).

Reimplemented from Iterator.

Reimplemented in COLINOptimizer, and SNLLOptimizer.

8.102.3.4 void finalize_run () [inline, protected, virtual]

deallocation and resetting of instance pointers

Optional: perform finalization phases of run sequence, like deallocating memory and resetting instance pointers. Commonly used in sub-iterator executions. This is a virtual function; when re-implementing, a derived class must call its nearest parent's finalize_run(), typically _after_ performing its own implementation steps.

Reimplemented from Minimizer.

Reimplemented in SNLLOptimizer.

8.102.3.5 void print_results (std::ostream & *s*) [protected, virtual]

Redefines default iterator results printing to include optimization results (objective functions and constraints).

Reimplemented from Iterator.

8.102.3.6 void primary_resp_recast (const Variables & *native_vars*, const Variables & *scaled_vars*, const Response & *native_response*, Response & *iterator_response*) [static, private]

from native (user) to iterator space

Objective function map from user/native space to iterator/scaled/combined space using a RecastModel. If resizing the response, copies the constraint (secondary) data from native_response too

8.102.3.7 void weighted_sum (const Response & *full_response*, Response & *reduced_response*, const RealVector & *multiobj_wts*) const [private]

weighted objective for single-objective optimizers

This function is responsible for the mapping of multiple objective functions into a single objective for publishing to single-objective optimizers. Used in DOTOptimizer, NPSOLOptimizer, SNLLOptimizer, and SGOPTApplication on every function evaluation. The simple weighting approach (using primaryRespFnWts) is the only technique supported currently. The weightings are used to scale function values, gradients, and Hessians as needed.

8.102.3.8 void multi_objective_retrieve (const Variables & *vars*, Response & *response*) const [private]

from the solution of a single-objective optimizer

Retrieve a full multiobjective response based on the data returned by a single objective optimizer by performing a data_pairs search.

The documentation for this class was generated from the following files:

- DakotaOptimizer.H
- DakotaOptimizer.C

8.103 ParallelConfiguration Class Reference

collectively identify a particular multilevel parallel configuration.

Public Member Functions

- ParallelConfiguration ()
  default constructor
- ParallelConfiguration (const ParallelConfiguration &pl)
  copy constructor
- ~ParallelConfiguration ()
  destructor
- ParallelConfiguration & operator= (const ParallelConfiguration &pl)
  assignment operator
- const ParallelLevel & w_parallel_level () const
  return the ParallelLevel corresponding to wPLIter
- const ParallelLevel & si_parallel_level () const
  return the ParallelLevel corresponding to siPLIter
- const ParallelLevel & ie_parallel_level () const
  return the ParallelLevel corresponding to iePLIter
- const ParallelLevel & ea_parallel_level () const
  return the ParallelLevel corresponding to eaPLIter

Private Member Functions

- void assign (const ParallelConfiguration &pl)
  assign the attributes of the incoming pl to this object

Private Attributes

- short numParallelLevels
  number of parallel levels
- ParLevLIter wPLIter
  improves modularity by avoiding explicit usage of MPI_COMM_WORLD)

- ParLevLIter siPLIter

  (there may be more than one per parallel configuration instance)

- ParLevLIter iePLIter

  (there can only be one)

- ParLevLIter eaPLIter

  (there can only be one)

Friends

- class ParallelLibrary

  streamline implementation

8.103.1 Detailed Description

collectively identify a particular multilevel parallel configuration.

Rather than containing the multilevel parallel configuration directly, ParallelConfiguration instead provides a set of list iterators which point into a combined list of ParallelLevels. This approach allows different configurations to reuse ParallelLevels without copying them. A list of ParallelConfigurations is contained in ParallelLibrary (ParallelLibrary::parallelConfigurations).

The documentation for this class was generated from the following file:

- ParallelLibrary.H

8.104 ParallelDirectApplicInterface Class Reference

plug-ins using assign_rep().

Inheritance diagram for ParallelDirectApplicInterface::



Public Member Functions

- ParallelDirectApplicInterface (const Dakota::ProblemDescDB &problem_db, const MPI_Comm &analysis_comm)

  constructor

- ~ParallelDirectApplicInterface ()

  destructor

Protected Member Functions

- int derived_map_ac (const Dakota::String &ac_name)

  execute an analysis code portion of a direct evaluation invocation

8.104.1 Detailed Description

plug-ins using assign_rep().

The plug-in ParallelDirectApplicInterface resides in namespace SIM and uses a copy of textbook() to perform parallel parameter to response mappings. It may be activated by specifying the –with-plugin configure option, which activates the DAKOTA_PLUGIN macro in dakota_config.h used by main.C (which activates the plug-in code block within that file) and activates the PLUGIN_S declaration defined in Makefile.include and used in Makefile.source (which add this class to the build). Test input files should then use an analysis_driver of "plugin_-textbook".

The documentation for this class was generated from the following files:

- PluginParallelDirectApplicInterface.H
- PluginParallelDirectApplicInterface.C

8.105 ParallelLevel Class Reference

communicator partitioning.

Public Member Functions

- ParallelLevel ()

  default constructor

- ParallelLevel (const ParallelLevel &pl)

  copy constructor

- ~ParallelLevel ()

  destructor

- ParallelLevel & operator= (const ParallelLevel &pl)

  assignment operator

- bool dedicated_master_flag () const

  return dedicatedMasterFlag

- bool communicator_split_flag () const

  return commSplitFlag

- bool server_master_flag () const

  return serverMasterFlag

- bool message_pass () const

  return messagePass

- const int & num_servers () const

  return numServers

- const int & processors_per_server () const

  return procsPerServer

- const MPI_Comm & server_intra_communicator () const

  return serverIntraComm

- const int & server_communicator_rank () const

  return serverCommRank

- const int & server_communicator_size () const

  return serverCommSize

- const MPI_Comm & hub_server_intra_communicator () const

  return hubServerIntraComm

- const int & hub_server_communicator_rank () const

  return hubServerCommRank

- const int & hub_server_communicator_size () const

  return hubServerCommSize

- const MPI_Comm & hub_server_inter_communicator () const

  return hubServerInterComm

- MPI_Comm ∗ hub_server_inter_communicators () const

  return hubServerInterComms

- const int & server_id () const

  return serverId

Private Member Functions

- void assign (const ParallelLevel &pl)

  assign the attributes of the incoming pl to this object

Private Attributes

- bool dedicatedMasterFlag

  signals dedicated master partitioning

- bool commSplitFlag

  signals a communicator split was used

- bool serverMasterFlag

  identifies master server processors

- bool messagePass

  flag for message passing at this level

- int numServers

  number of servers

- int procsPerServer

  processors per server

- MPI_Comm serverIntraComm

  intracomm. for each server partition

- int serverCommRank

  rank in serverIntraComm

- int serverCommSize

  size of serverIntraComm

- MPI_Comm hubServerIntraComm

  intracomm for all serverCommRank==0 w/i next higher level serverIntraComm

- int hubServerCommRank

  rank in hubServerIntraComm

- int hubServerCommSize

  size of hubServerIntraComm

- MPI_Comm hubServerInterComm

  intercomm. between a server & the hub (on server partitions only)

- MPI_Comm ∗ hubServerInterComms

  intercomm. array on hub processor

- int serverId

  server identifier

Friends

- class ParallelLibrary

  streamline implementation

8.105.1 Detailed Description

communicator partitioning.

A list of these levels is contained in ParallelLibrary (ParallelLibrary::parallelLevels), which defines all of the parallelism levels across one or more multilevel parallelism configurations.

The documentation for this class was generated from the following file:

- ParallelLibrary.H

8.106 ParallelLibrary Class Reference

message passing within these levels.

Public Member Functions

- ParallelLibrary (int &argc, char **&argv)

  stand-alone mode constructor

- ParallelLibrary ()

  default library mode constructor (assumes MPI_COMM_WORLD)

- ParallelLibrary (MPI_Comm dakota_mpi_comm)

  library mode constructor accepting communicator

- ParallelLibrary (const std::string &dummy)

  dummy constructor (used for dummy_lib)

- ~ParallelLibrary ()

  destructor

- const ParallelLevel & init_iterator_communicators (const int &iterator_servers, const int &procs_per_iterator, const int &max_iterator_concurrency, const String &default_config, const String &iterator_scheduling)

  split MPI_COMM_WORLD into iterator communicators

- const ParallelLevel & init_evaluation_communicators (const int &evaluation_servers, const int &procs_per_evaluation, const int &max_evaluation_concurrency, const int &asynch_local_evaluation_concurrency, const String &default_config, const String &evaluation_scheduling)

  split an iterator communicator into evaluation communicators

- const ParallelLevel & init_analysis_communicators (const int &analysis_servers, const int &procs_per_analysis, const int &max_analysis_concurrency, const int &asynch_local_analysis_concurrency, const String &default_config, const String &analysis_scheduling)

  split an evaluation communicator into analysis communicators

- void free_iterator_communicators ()

  deallocate iterator communicators

- void free_evaluation_communicators ()

  deallocate evaluation communicators

- void free_analysis_communicators ()

  deallocate analysis communicators

- void print_configuration ()

print the parallel level settings for a particular parallel configuration

- void specify_outputs_restart (CommandLineHandler &cmd_line_handler)

  inputs (normal mode)

- void specify_outputs_restart (const char *clh_std_output_filename=NULL, const char *clh_std_error_filename=NULL, const char *clh_read_restart_filename=NULL, const char *clh_write_restart_filename=NULL, int stop_restart_evals=0, bool pre_run_flag=false)

  inputs (library mode).

- void manage_outputs_restart (const ParallelLevel &pl)

  manage output streams and restart file(s) (both modes)

- void close_streams ()

  close streams, files, and any other services

- void abort_helper (int code) const

  finalize MPI with correct communicator for abort

- void output_helper (const std::string &s, std::ostream &outfile=Cout) const

  perform stdout on rank 0 only

- bool command_line_check () const

  return checkFlag

- bool command_line_pre_run () const

  return preRunFlag

- bool command_line_run () const

  return runFlag

- bool command_line_post_run () const

  return postRunFlag

- bool command_line_user_modes () const

  return userModesFlag

- const String & command_line_pre_run_input () const

  preRunInput filename

- const String & command_line_pre_run_output () const

  preRunOutput filename

- const String & command_line_run_input () const

  runInput filename

- const String & command_line_run_output () const
  runOutput filename
- const String & command_line_post_run_input () const
  postRunInput filename
- const String & command_line_post_run_output () const
  postRunOutput fname
- void send_si (int &send_int, int dest, int tag)
  blocking send at the strategy-iterator communication level
- void recv_si (int &recv_int, int source, int tag, MPI_Status &status)
  blocking receive at the strategy-iterator communication level
- void send_si (MPIPackBuffer &send_buff, int dest, int tag)
  blocking send at the strategy-iterator communication level
- void isend_si (MPIPackBuffer &send_buff, int dest, int tag, MPI_Request &send_req)
  nonblocking send at the strategy-iterator communication level
- void recv_si (MPIUnpackBuffer &recv_buff, int source, int tag, MPI_Status &status)
  blocking receive at the strategy-iterator communication level
- void irecv_si (MPIUnpackBuffer &recv_buff, int source, int tag, MPI_Request &recv_req)
  nonblocking receive at the strategy-iterator communication level
- void send_ie (MPIPackBuffer &send_buff, int dest, int tag)
  blocking send at the iterator-evaluation communication level
- void isend_ie (MPIPackBuffer &send_buff, int dest, int tag, MPI_Request &send_req)
  nonblocking send at the iterator-evaluation communication level
- void recv_ie (MPIUnpackBuffer &recv_buff, int source, int tag, MPI_Status &status)
  blocking receive at the iterator-evaluation communication level
- void irecv_ie (MPIUnpackBuffer &recv_buff, int source, int tag, MPI_Request &recv_req)
  nonblocking receive at the iterator-evaluation communication level
- void send_ea (int &send_int, int dest, int tag)
  blocking send at the evaluation-analysis communication level
- void isend_ea (int &send_int, int dest, int tag, MPI_Request &send_req)
  nonblocking send at the evaluation-analysis communication level
- void recv_ea (int &recv_int, int source, int tag, MPI_Status &status)

blocking receive at the evaluation-analysis communication level

- void irecv_ea (int &recv_int, int source, int tag, MPI_Request &recv_req)

  nonblocking receive at the evaluation-analysis communication level

- void bcast_w (int &data)

  broadcast an integer across MPI_COMM_WORLD

- void bcast_i (int &data)

  broadcast an integer across an iterator communicator

- void bcast_i (short &data)

  broadcast a short integer across an iterator communicator

- void bcast_e (int &data)

  broadcast an integer across an evaluation communicator

- void bcast_a (int &data)

  broadcast an integer across an analysis communicator

- void bcast_si (int &data)

  broadcast an integer across a strategy-iterator intra communicator

- void bcast_w (MPIPackBuffer &send_buff)

  broadcast a packed buffer across MPI_COMM_WORLD

- void bcast_i (MPIPackBuffer &send_buff)

  broadcast a packed buffer across an iterator communicator

- void bcast_e (MPIPackBuffer &send_buff)

  broadcast a packed buffer across an evaluation communicator

- void bcast_a (MPIPackBuffer &send_buff)

  broadcast a packed buffer across an analysis communicator

- void bcast_si (MPIPackBuffer &send_buff)

  broadcast a packed buffer across a strategy-iterator intra communicator

- void bcast_w (MPIUnpackBuffer &recv_buff)

  matching receive for packed buffer broadcast across MPI_COMM_WORLD

- void bcast_i (MPIUnpackBuffer &recv_buff)

  matching receive for packed buffer bcast across an iterator communicator

- void bcast_e (MPIUnpackBuffer &recv_buff)

  matching receive for packed buffer bcast across an evaluation communicator

- void bcast_a (MPIUnpackBuffer &recv_buff)

  matching receive for packed buffer bcast across an analysis communicator

- void bcast_si (MPIUnpackBuffer &recv_buff)

  matching recv for packed buffer bcast across a strat-iterator intra comm

- void barrier_w ()

  enforce MPI_Barrier on MPI_COMM_WORLD

- void barrier_i ()

  enforce MPI_Barrier on an iterator communicator

- void barrier_e ()

  enforce MPI_Barrier on an evaluation communicator

- void barrier_a ()

  enforce MPI_Barrier on an analysis communicator

- void reduce_sum_ea (double ∗local_vals, double ∗sum_vals, const int &num_vals)

  compute a sum over an eval-analysis intra-communicator using MPI_Reduce

- void reduce_sum_a (double ∗local_vals, double ∗sum_vals, const int &num_vals)

  compute a sum over an analysis communicator using MPI_Reduce

- void test (MPI_Request &request, int &test_flag, MPI_Status &status)

  test a nonblocking send/receive request for completion

- void wait (MPI_Request &request, MPI_Status &status)

  wait for a nonblocking send/receive request to complete

- void waitall (const int &num_recvs, MPI_Request ∗&recv_reqs)

  wait for all messages from a series of nonblocking receives

- void waitsome (const int &num_sends, MPI_Request ∗&recv_requests, int &num_recvs, int ∗&index_-array, MPI_Status ∗&status_array)

  but complete all that are available

- void free (MPI_Request &request)

  free an MPI_Request

- const int & world_size () const

  return worldSize

- const int & world_rank () const

  return worldRank

- bool mpirun_flag () const

  return mpirunFlag

- bool is_null () const

  return dummyFlag

- Real parallel_time () const

  returns current MPI wall clock time

- void parallel_configuration_iterator (const ParConfigLIter &pc_iter)

  set the current ParallelConfiguration node

- const ParConfigLIter & parallel_configuration_iterator () const

  return the current ParallelConfiguration node

- const ParallelConfiguration & parallel_configuration () const

  return the current ParallelConfiguration instance

- size_t num_parallel_configurations () const

  returns the number of entries in parallelConfigurations

- bool parallel_configuration_is_complete ()

  identifies if the current ParallelConfiguration has been fully populated

- void increment_parallel_configuration ()

  add a new node to parallelConfigurations and increment currPCIter

- bool w_parallel_level_defined () const

  parallel level

- bool si_parallel_level_defined () const

  strategy-iterator parallel level

- bool ie_parallel_level_defined () const

  iterator-evaluation parallel level

- bool ea_parallel_level_defined () const

  evaluation-analysis parallel level

- std::vector< MPI_Comm > analysis_intra_communicators ()

  prior to execution time).

Static Public Member Functions

- static bool detect_parallel_launch (int &argc, char **&argv)

  based on command line arguments and environment variables

Private Member Functions

- void init_mpi_comm (MPI_Comm dakota_mpi_comm)

  shared function for initializing based on passed MPI_Comm

- void init_communicators (const ParallelLevel &parent_pl, const int &num_servers, const int &procs_per_server, const int &max_concurrency, const int &asynch_local_concurrency, const String &default_config, const String &scheduling_override)

  split a parent communicator into child server communicators

- void free_communicators (ParallelLevel &pl)

  deallocate intra/inter communicators for a particular ParallelLevel

- bool split_communicator_dedicated_master (const ParallelLevel &parent_pl, ParallelLevel &child_pl, const int &proc_remainder)

  and num_servers child communicators

- bool split_communicator_peer_partition (const ParallelLevel &parent_pl, ParallelLevel &child_pl, const int &proc_remainder)

  communicators (no dedicated master processor)

- bool resolve_inputs (int &num_servers, int &procs_per_server, const int &avail_procs, int &proc_remainder, const int &max_concurrency, const int &capacity_multiplier, const String &default_config, const String &scheduling_override, bool print_rank)

  resolve user inputs into a sensible partitioning scheme

- void send (MPIPackBuffer &send_buff, const int &dest, const int &tag, ParallelLevel &parent_pl, ParallelLevel &child_pl)

  blocking buffer send at the current communication level

- void send (int &send_int, const int &dest, const int &tag, ParallelLevel &parent_pl, ParallelLevel &child_pl)

  blocking integer send at the current communication level

- void isend (MPIPackBuffer &send_buff, const int &dest, const int &tag, MPI_Request &send_req, ParallelLevel &parent_pl, ParallelLevel &child_pl)

  nonblocking buffer send at the current communication level

- void isend (int &send_int, const int &dest, const int &tag, MPI_Request &send_req, ParallelLevel &parent_pl, ParallelLevel &child_pl)

  nonblocking integer send at the current communication level

- void recv (MPIUnpackBuffer &recv_buff, const int &source, const int &tag, MPI_Status &status, ParallelLevel &parent_pl, ParallelLevel &child_pl)

  blocking buffer receive at the current communication level

- void recv (int &recv_int, const int &source, const int &tag, MPI_Status &status, ParallelLevel &parent_pl, ParallelLevel &child_pl)

  blocking integer receive at the current communication level

- void irecv (MPIUnpackBuffer &recv_buff, const int &source, const int &tag, MPI_Request &recv_req, ParallelLevel &parent_pl, ParallelLevel &child_pl)

  nonblocking buffer receive at the current communication level

- void irecv (int &recv_int, const int &source, const int &tag, MPI_Request &recv_req, ParallelLevel &parent_pl, ParallelLevel &child_pl)

  nonblocking integer receive at the current communication level

- void bcast (int &data, const MPI_Comm &comm)

  broadcast an integer across a communicator

- void bcast (short &data, const MPI_Comm &comm)

  broadcast a short integer across a communicator

- void bcast (MPIPackBuffer &send_buff, const MPI_Comm &comm)

  send a packed buffer across a communicator using a broadcast

- void bcast (MPIUnpackBuffer &recv_buff, const MPI_Comm &comm)

  matching receive for a packed buffer broadcast

- void barrier (const MPI_Comm &comm)

  enforce MPI_Barrier on comm

- void reduce_sum (double *local_vals, double *sum_vals, const int &num_vals, const MPI_Comm &comm)

  compute a sum over comm using MPI_Reduce

- void check_error (const String &err_source, const int &err_code)

  check the MPI return code and abort if error

- void manage_run_modes (CommandLineHandler &cmd_line_handler)

  manage run mode information from command-line handler

- void split_filenames (const char *filenames, String &input_filename, String &output_filename)

  unchanged strings if tokens not found

Private Attributes

- std::ofstream output_ofstream

  tagged file redirection of stdout

- std::ofstream error_ofstream

  tagged file redirection of stderr

- MPI_Comm dakotaMPIComm

  MPI_Comm on which DAKOTA is running.

- int worldRank

  rank in MPI_Comm in which DAKOTA is running

- int worldSize

  size of MPI_Comm in which DAKOTA is running

- bool mpirunFlag

  flag for a parallel mpirun/yod launch

- bool ownMPIFlag

  flag for ownership of MPI_Init/MPI_Finalize

- bool dummyFlag

  prevents multiple MPI_Finalize calls due to dummy_lib

- bool stdOutputFlag

  flags redirection of DAKOTA std output to a file

- bool stdErrorFlag

  flags redirection of DAKOTA std error to a file

- bool checkFlag

  flags invocation with command line option -check

- bool preRunFlag

  flags invocation with command line option -pre_run

- bool runFlag

  flags invocation with command line option -run

- bool postRunFlag

  flags invocation with command line option -post_run

- bool userModesFlag

  whether user run mdoes are active

- String preRunInput

  filename for pre_run input

- String preRunOutput

  filename for pre_run output

- String runInput

  filename for run input

- String runOutput

  filename for run output

- String postRunInput

  filename for post_run input

- String postRunOutput

  filename for post_run output

- Real startCPUTime

  start reference for UTILIB CPU timer

- Real startWCTime

  start reference for UTILIB wall clock timer

- Real startMPITime

  start reference for MPI wall clock timer

- long startClock

  start reference for local clock() timer measuring parent+child CPU

- const char * stdOutputFilename

  filename for redirection of stdout

- const char * stdErrorFilename

  filename for redirection of stderr

- const char * readRestartFilename

  input filename for restart

- const char * writeRestartFilename

  output filename for restart

- int stopRestartEvals

  number of evals at which to stop restart processing

- std::list< ParallelLevel > parallelLevels

  parallelism among one or more configurations

- std::list< ParallelConfiguration > parallelConfigurations

  indexing into parallelLevels

- ParLevLIter currPLIter

  list iterator identifying the current node in parallelLevels

- ParConfigLIter currPCIter

  list iterator identifying the current node in parallelConfigurations

8.106.1 Detailed Description

message passing within these levels.

The ParallelLibrary class encapsulates all of the details of performing message passing within multiple levels of parallelism. It provides functions for partitioning of levels according to user configuration input and functions for passing messages within and across MPI communicators for each of the parallelism levels. If support for other message-passing libraries beyond MPI becomes needed (PVM, ...), then ParallelLibrary would be promoted to a base class with virtual functions to encapsulate the library-specific syntax.

8.106.2 Constructor & Destructor Documentation

8.106.2.1 ParallelLibrary (int & *argc*, char ∗∗& *argv*)

stand-alone mode constructor

This constructor is the one used by main.C. It calls MPI_Init conditionally based on whether a parallel launch is detected.

8.106.2.2 ParallelLibrary ()

default library mode constructor (assumes MPI_COMM_WORLD)

This constructor provides a library mode default ParallelLibrary. It does not call MPI_Init, but rather gathers data from MPI_COMM_WORLD if MPI_Init has been called elsewhere.

8.106.2.3 ParallelLibrary (MPI_Comm *dakota_mpi_comm*)

library mode constructor accepting communicator

This constructor provides a library mode ParallelLibrary, accepting an MPI communicator that might not be MPI_COMM_WORLD. It does not call MPI_Init, but rather gathers data from dakota_mpi_comm if MPI_Init has been called elsewhere.

8.106.2.4 ParallelLibrary (const std::string & *dummy*)

dummy constructor (used for dummy_lib)

This constructor is used for creation of the global dummy_lib object, which is used to satisfy initialization requirements when the real ParallelLibrary object is not available.

8.106.3 Member Function Documentation

8.106.3.1 void specify_outputs_restart (CommandLineHandler & *cmd_line_handler*)

inputs (normal mode)

On the rank 0 processor, get the -output, -error, -read_restart, and -write_restart filenames and the -stop_restart limit from the command line. Defaults for the filenames from the command line handler are NULL for the filenames except write which defaults to dakota.rst and 0 for read_restart_evals if no user specification. This information is Bcast from rank 0 to all iterator masters in manage_outputs_restart().

8.106.3.2 void specify_outputs_restart (const char * *clh_std_output_filename* = `NULL`, const char * *clh_std_error_filename* = `NULL`, const char * *clh_read_restart_filename* = `NULL`, const char * *clh_write_restart_filename* = `NULL`, int *stop_restart_evals* = `0`, bool *pre_run_flag* = `false`)

inputs (library mode).

Rather than extracting from the command line, pass the std output, std error, read restart, and write restart filenames and the stop restart limit directly. This function only needs to be invoked to specify non-default values [defaults for the filenames are NULL (resulting in no output redirection, no restart read, and default restart write) and 0 for the stop restart limit (resulting in no restart read limit)].

8.106.3.3 void manage_outputs_restart (const ParallelLevel & *pl*)

manage output streams and restart file(s) (both modes)

If the user has specified the use of files for DAKOTA standard output and/or standard error, then bind these filenames to the Cout/Cerr macros. In addition, if concurrent iterators are to be used, create and tag multiple output streams in order to prevent jumbled output. Manage restart file(s) by processing any incoming evaluations from an old restart file and by setting up the binary output stream for new evaluations. Only master iterator processor(s) read & write restart information. This function must follow init_iterator_communicators so that restart can be managed properly for concurrent iterator strategies. In the case of concurrent iterators, each iterator has its own restart file tagged with iterator number.

8.106.3.4 void close_streams ()

close streams, files, and any other services

Close streams associated with manage_outputs and manage_restart and terminate any additional services that may be active.

8.106.3.5 void increment_parallel_configuration () [inline]

add a new node to parallelConfigurations and increment currPCIter

Called from the ParallelLibrary ctor and from Model::init_communicators(). An increment is performed for each Model initialization except the first (which inherits the world and strategy-iterator parallel levels from the first partial configuration).

8.106.3.6 void init_communicators (const ParallelLevel & *parent_pl*, const int & *num_servers*, const int & *procs_per_server*, const int & *max_concurrency*, const int & *asynch_local_concurrency*, const String & *default_config*, const String & *scheduling_override*) [private]

split a parent communicator into child server communicators

Split parent communicator into concurrent child server partitions as specified by the passed parameters. This constructs new child intra-communicators and parent-child inter-communicators. This function is called from the Strategy constructor for the concurrent iterator level and from ApplicationInterface::init_communicators() for the concurrent evaluation and concurrent analysis levels.

8.106.3.7 bool resolve_inputs (int & *num_servers*, int & *procs_per_server*, const int & *avail_procs*, int & *proc_remainder*, const int & *max_concurrency*, const int & *capacity_multiplier*, const String & *default_config*, const String & *scheduling_override*, bool *print_rank*) [private]

resolve user inputs into a sensible partitioning scheme

This function is responsible for the "auto-configure" intelligence of DAKOTA. It resolves a variety of inputs and overrides into a sensible partitioning configuration for a particular parallelism level. It also handles the general case in which a user's specification request does not divide out evenly with the number of available processors for the level. If num_servers & procs_per_server are both nondefault, then the former takes precedence.

The documentation for this class was generated from the following files:

- ParallelLibrary.H
- ParallelLibrary.C

8.107 ParamResponsePair Class Reference

evaluation id.

Public Member Functions

- ParamResponsePair ()

  default constructor

- ParamResponsePair (const Variables &vars, const String &interface_id, const Response &response, bool deep_copy=false)

  alternate constructor for temporaries

- ParamResponsePair (const Variables &vars, const String &interface_id, const Response &response, const int eval_id, bool deep_copy=true)

  standard constructor for history uses

- ParamResponsePair (const ParamResponsePair &pair)

  copy constructor

- ~ParamResponsePair ()

  destructor

- ParamResponsePair & operator= (const ParamResponsePair &pair)

  assignment operator

- void read (std::istream &s)

  read a ParamResponsePair object from an std::istream

- void write (std::ostream &s) const

  write a ParamResponsePair object to an std::ostream

- void read_annotated (std::istream &s)

  read a ParamResponsePair object in annotated format from an std::istream

- void write_annotated (std::ostream &s) const

  write a ParamResponsePair object in annotated format to an std::ostream

- void write_tabular (std::ostream &s) const

  write a ParamResponsePair object in tabular format to an std::ostream

- void read (BiStream &s)

  read a ParamResponsePair object from the binary restart stream

- void write (BoStream &s) const

write a ParamResponsePair object to the binary restart stream

- void read (MPIUnpackBuffer &s)

  read a ParamResponsePair object from a packed MPI buffer

- void write (MPIPackBuffer &s) const

  write a ParamResponsePair object to a packed MPI buffer

- int eval_id () const

  return the evaluation identifier

- const String & interface_id () const

  return the interface identifier from the response object

- const IntStringPair & eval_interface_ids () const

  return the aggregate eval/interface identifier from the response object

- const Variables & prp_parameters () const

  return the parameters object

- const Response & prp_response () const

  return the response object

- void prp_response (const Response &response)

  set the response object

- const ActiveSet & active_set () const

  return the active set object from the response object

- void active_set (const ActiveSet &set)

  set the active set object within the response object

Private Attributes

- Variables prPairParameters

  the set of parameters for the function evaluation

- Response prPairResponse

  the response set for the function evaluation

- IntStringPair evalInterfaceIds

  the evalInterfaceIds aggregate

Friends

- bool operator== (const ParamResponsePair &pair1, const ParamResponsePair &pair2)

  equality operator

- bool operator!= (const ParamResponsePair &pair1, const ParamResponsePair &pair2)

  inequality operator

8.107.1 Detailed Description

evaluation id.

ParamResponsePair provides a container class for association of the input for a particular function evaluation (a variables object) with the output from this function evaluation (a response object), along with an evaluation identifier. This container defines the basic unit used in the data_pairs cache, in restart file operations, and in a variety of scheduling algorithm queues. With the advent of STL, replacement of arrays of this class with map<> and pair<> template constructs may be possible (using map<pair<int,String>, pair<Variables,Response> >, for example), assuming that deep copies, I/O, alternate constructors, etc., can be adequately addressed. Boost tuple<> may also be a candidate.

8.107.2 Constructor & Destructor Documentation

8.107.2.1 ParamResponsePair (const Variables & *vars*, const String & *interface_id*, const Response & *response*, bool *deep_copy* = `false`) `[inline]`

alternate constructor for temporaries

Uses of this constructor often employ the standard Variables and Response copy constructors to share representations since this constructor is commonly used for search_pairs (which are local instantiations that go out of scope prior to any changes to values; i.e., they are not used for history).

8.107.2.2 ParamResponsePair (const Variables & *vars*, const String & *interface_id*, const Response & *response*, const int *eval_id*, bool *deep_copy* = `true`) `[inline]`

standard constructor for history uses

Uses of this constructor often do not share representations since deep copies are used when history mechanisms (e.g., data_pairs and beforeSynchCorePRPQueue) are involved.

8.107.3 Member Function Documentation

8.107.3.1 void read (MPIUnpackBuffer & *s*) `[inline]`

read a ParamResponsePair object from a packed MPI buffer

idInterface is omitted since master processor retains interface ids and communicates asv and response data only with slaves.

8.107.3.2 void write (MPIPackBuffer & *s*) const [inline]

write a ParamResponsePair object to a packed MPI buffer

idInterface is omitted since master processor retains interface ids and communicates asv and response data only with slaves.

8.107.4 Member Data Documentation

8.107.4.1 IntStringPair evalInterfaceIds [private]

the evalInterfaceIds aggregate

the function evaluation identifier (assigned from ApplicationInterface::fnEvalId) is paired with the interface used to generate the response object. Used in PRPCache id_vars_set_compare to prevent duplicate detection on results from different interfaces. evalInterfaceIds belongs here rather than in Response since some Response objects involve consolidation of several fn evals (e.g., Model::synchronize_derivatives()) that are not, in total, generated by a single interface. The prPair, on the other hand, is used for storage of all low level fn evals that get evaluated in ApplicationInterface::map().

The documentation for this class was generated from the following files:

- ParamResponsePair.H
- ParamResponsePair.C

8.108 ParamStudy Class Reference

Class for vector, list, centered, and multidimensional parameter studies.

Inheritance diagram for ParamStudy::



Public Member Functions

- ParamStudy (Model &model)

  constructor

- ~ParamStudy ()

  destructor

- void pre_run ()

  which can generate all Variables (parameter sets) a priori

- void extract_trends ()

  Redefines the run_iterator virtual function for the PStudy/DACE branch.

- void post_input ()

  read tabular data for post-run mode

- void post_run (std::ostream &s)

  perform final analysis phase in a standalone way

Private Member Functions

- void sample ()

  performs the parameter study by sampling from a list of points

- void vector_loop ()

  step vectors

- void centered_loop ()

  centered about an initial point

- void multidim_loop ()

  defined by a set of multidimensional partitions

- bool distribute_list_of_points (const RealVector &list_of_pts)

  and listDRVPoints

- bool distribute_step_vector (const RealVector &step_vector)

  distributes incoming step_vector among contStepVector and discStepVector

- void final_point_to_step_vector ()

  compute step vectors from finalPoint, initial points, and numSteps

- void distribute_partitions ()

  compute step vectors from variablePartitions and global bounds

- bool check_num_steps (int num_steps)

  perform error checks on numSteps

- bool check_final_point (const RealVector &final_pt)

  perform error checks on finalPoint

- bool check_steps_per_variable (const IntVector &steps_per_var)

  perform error checks on stepsPerVariable

- bool check_variable_partitions (const UShortArray &partitions)

  perform error checks on variablePartitions

- bool check_finite_bounds ()

  as required for computing partitions of finite ranges

- bool check_ranges_sets (int num_steps)

  sanity check for vector parameter study

- bool check_ranges_sets (const IntVector &steps)

  sanity check for centered parameter study

- bool check_sets (const IntVector &steps)

  sanity check for increments along int/real set dimensions

- int truncate (const Real &value) const

  cast Real to int and ensure no resulting change in value

- int integer_step (int range, int num_steps) const

check for integer remainder and return step

- int index_step (size_t start, size_t end, int num_steps) const

  check for out of bounds and index remainder and return step

- void write_ordered (std::ostream &s, const RealVector &c_vector, const IntVector &di_vector, const RealVector &dr_vector)

  reorder CV/DIV/DRV into standard output order

- void write_ordered (std::ostream &s, const RealVector &c_vector, const IntVector &d_vector)

  reorder CV/DV into standard output order

- void c_step (size_t c_index, int increment, Variables &vars)

  helper function for performing a continuous step in one variable

- void dri_step (size_t d_index, size_t di_index, int increment, Variables &vars)

  range variable

- void dsi_step (size_t d_index, size_t di_index, int increment, const IntSet &values, Variables &vars)

  helper function for performing a discrete step in an integer set variable

- void dsr_step (size_t d_index, size_t dr_index, int increment, const RealSet &values, Variables &vars)

  helper function for performing a discrete step in a real set variable

Private Attributes

- short pStudyType

  CENTERED, or MULTIDIM.

- size_t numEvals

  total number of parameter study evaluations computed from specification

- RealVectorArray listCVPoints

  array of continuous evaluation points for the list_parameter_study

- IntVectorArray listDIVPoints

  array of discrete int evaluation points for the list_parameter_study

- RealVectorArray listDRVPoints

  array of discrete real evaluation points for the list_parameter_study

- RealVector initialCVPoint

  the continuous starting point for vector and centered parameter studies

- IntVector initialDIVPoint

the continuous starting point for vector and centered parameter studies

- RealVector initialDRVPoint

  the continuous starting point for vector and centered parameter studies

- RealVector finalPoint

  the ending point for vector_parameter_study (a specification option)

- RealVector contStepVector

  the n-dimensional continuous increment in vector_parameter_study

- IntVector discStepVector

  the n-dimensional discrete increment in vector_parameter_study

- int numSteps

  the number of times stepVector is applied in vector_parameter_study

- IntVector stepsPerVariable

  variable in a centered_parameter_study

- UShortArray variablePartitions

  number of partitions for each variable in a multidim_parameter_study

8.108.1 Detailed Description

Class for vector, list, centered, and multidimensional parameter studies.

The ParamStudy class contains several algorithms for performing parameter studies of different types. The vector parameter study steps along an n-dimensional vector from an arbitrary initial point to an arbitrary final point in a specified number of steps. The centered parameter study performs a number of plus and minus offsets in each coordinate direction around a center point. A multidimensional parameter study fills an n-dimensional hypercube based on bounds and a specified number of partitions for each dimension. And the list parameter study provides for a user specification of a list of points to evaluate, which allows general parameter investigations not fitting the structure of vector, centered, or multidim parameter studies.

8.108.2 Member Function Documentation

8.108.2.1 void pre_run () [virtual]

which can generate all Variables (parameter sets) a priori

pre-run phase, which a derived iterator may optionally reimplement; when not present, pre-run is likely integrated into the derived run function. This is a virtual function; when re-implementing, a derived class must call its nearest parent's pre_run(), if implemented, typically _before_ performing its own implementation steps.

Reimplemented from Iterator.

8.108.2.2 void post_run (std::ostream & *s*) [virtual]

perform final analysis phase in a standalone way

Post-run phase, which a derived iterator may optionally reimplement; when not present, post-run is likely integrated into run. This is a virtual function; when re-implementing, a derived class must call its nearest parent's post_run(), typically _after_ performing its own implementation steps.

Reimplemented from Iterator.

The documentation for this class was generated from the following files:

- ParamStudy.H
- ParamStudy.C

8.109 partial_prp_equality Struct Reference

predicate for comparing ONLY the idInterface and Vars attributes of PRPair

Public Member Functions

- bool operator() (const ParamResponsePair &database_pr, const ParamResponsePair &search_pr) const
  access operator

8.109.1 Detailed Description

predicate for comparing ONLY the idInterface and Vars attributes of PRPair

The documentation for this struct was generated from the following file:

- PRPMultiIndex.H

8.110 partial_prp_hash Struct Reference

wrapper to delegate to the ParamResponsePair hash_value function

Public Member Functions

- std::size_t operator() (const ParamResponsePair &prp) const
  access operator

8.110.1 Detailed Description

wrapper to delegate to the ParamResponsePair hash_value function

The documentation for this struct was generated from the following file:

- PRPMultiIndex.H

8.111 PecosApproximation Class Reference

Derived approximation class for global basis polynomials.

Inheritance diagram for PecosApproximation::



Public Member Functions

- PecosApproximation ()

  default constructor

- PecosApproximation (const String &approx_type, const UShortArray &approx_order, size_t num_vars, unsigned short data_order)

  alternate constructor

- PecosApproximation (ProblemDescDB &problem_db, size_t num_vars)

  standard ProblemDescDB-driven constructor

- ~PecosApproximation ()

  destructor

- void solution_approach (short soln_approach)

  set pecosBasisApprox.configOptions.expCoeffsSolnApproach

- short solution_approach () const

  get pecosBasisApprox.configOptions.expCoeffsSolnApproach

- void expansion_coefficient_flag (bool coeff_flag)

  set pecosBasisApprox.configOptions.expansionCoeffFlag

- bool expansion_coefficient_flag () const

  get pecosBasisApprox.configOptions.expansionCoeffFlag

- void expansion_gradient_flag (bool grad_flag)

  set pecosBasisApprox.configOptions.expansionGradFlag

- bool expansion_gradient_flag () const

  get pecosBasisApprox.configOptions.expansionGradFlag

- void refinement_control (short refine_cntl)

set pecosBasisApprox.configOptions.refinementControl

- short refinement_control () const

  get pecosBasisApprox.configOptions.refinementControl

- void vbd_control (short vbd_cntl)

  set pecosBasisApprox.configOptions.vbdControl

- short vbd_control () const

  get pecosBasisApprox.configOptions.vbdControl

- void compute_component_effects ()

  computing component (main and interaction) effects

- void compute_total_effects ()

  computing total effects

- const Pecos::IntIntMap & sobol_index_map () const

  return pecosBasisApprox.sobol_index_map

- const Pecos::RealVector & sobol_indices () const

  return pecosBasisApprox.sobolIndices

- const Pecos::RealVector & total_sobol_indices () const

  return pecosBasisApprox.totalSobolIndices

- void random_variables_key (const Pecos::BoolDeque &random_vars_key)

  set pecosBasisApprox.randomVarsKey

- void integration_iterator (const Iterator &iterator)

  set pecosBasisApprox.driverRep

- void distribution_types (const Pecos::ShortArray &u_types, const Pecos::IntArray &rules)

  invoke Pecos::OrthogPolyApproximation::distribution_types()

- void polynomial_basis (const std::vector< Pecos::BasisPolynomial > &poly_basis)

  invoke Pecos::OrthogPolyApproximation::polynomial_basis()

- const std::vector< Pecos::BasisPolynomial > & polynomial_basis () const

  return Pecos::OrthogPolyApproximation::polynomial_basis()

- void distributions (const Pecos::ShortArray &u_types, const Pecos::IntArray &int_rules, const Pecos::DistributionParams &dp)

  invoke Pecos::OrthogPolyApproximation::distributions()

- void coefficients_norms_flag (bool flag)

invoke Pecos::OrthogPolyApproximation::coefficients_norms_flag()

- void expansion_terms (size_t terms)

  invoke Pecos::OrthogPolyApproximation::expansion_terms()

- size_t expansion_terms () const

  return Pecos::OrthogPolyApproximation::expansion_terms()

- void allocate_arrays ()

  invoke Pecos::PolynomialApproximation::allocate_arrays()

- const Real & get_mean ()

  return the mean of the expansion, treating all variables as random

- const Real & get_mean (const Pecos::RealVector &x)

  treating a subset of the variables as random

- const Pecos::RealVector & get_mean_gradient ()

  vector, treating all variables as random

- const Pecos::RealVector & get_mean_gradient (const Pecos::RealVector &x, const Pecos::SizetArray &dvv)

  and given DVV, treating a subset of the variables as random

- const Real & get_variance ()

  return the variance of the expansion, treating all variables as random

- const Real & get_variance (const Pecos::RealVector &x)

  treating a subset of the variables as random

- const Pecos::RealVector & get_variance_gradient ()

  vector, treating all variables as random

- const Pecos::RealVector & get_variance_gradient (const Pecos::RealVector &x, const Pecos::SizetArray &dvv)

  vector and given DVV, treating a subset of the variables as random

- Real get_covariance (const Pecos::RealVector &exp_coeffs_2)

  return the variance of the expansion, treating all variables as random

- Real get_covariance (const Pecos::RealVector &x, const Pecos::RealVector &exp_coeffs_2)

  variables as random

- void compute_moments ()

  polynomial approximation

- void compute_moments (const Pecos::RealVector &x)

  by the Pecos polynomial approximation

- const RealVector & moments () const

  return virtual Pecos::PolynomialApproximation::moments()

- const RealVector & expansion_moments () const

  return Pecos::PolynomialApproximation::expansionMoments

- const RealVector & numerical_moments () const

  return Pecos::PolynomialApproximation::numericalMoments

- Pecos::BasisApproximation & pecos_basis_approximation ()

  return pecosBasisApprox

Protected Member Functions

- const Real & get_value (const Pecos::RealVector &x)

  retrieve the approximate function value for a given parameter vector

- const Pecos::RealVector & get_gradient (const Pecos::RealVector &x)

  retrieve the approximate function gradient for a given parameter vector

- const Pecos::RealSymMatrix & get_hessian (const Pecos::RealVector &x)

  retrieve the approximate function Hessian for a given parameter vector

- int min_coefficients () const

  build the derived class approximation type in numVars dimensions

- void build ()

  builds the approximation from scratch

- void rebuild ()

  rebuilds the approximation incrementally

- void pop (bool save_sdp_set)

  removes entries from end of currentPoints (last points appended)

- size_t pop_count ()

  based on size of last data set appended

- void restore ()

  restores state prior to previous append()

- bool restore_available ()

queries availability of restoration for trial set

- size_t restoration_index ()

  return index of trial set within restorable bookkeeping sets

- void finalize ()

  finalize approximation by applying all remaining trial sets

- size_t finalization_index (size_t i)

  return index of i-th trailing trial set within restorable bookkeeping sets

- void print_coefficients (std::ostream &s) const

  print the coefficient array computed in build()/rebuild()

- const RealVector & approximation_coefficients () const

  return the coefficient array computed by build()/rebuild()

- void approximation_coefficients (const RealVector &approx_coeffs)

  computing with build()/rebuild()

Private Member Functions

- void append_from_current ()

  synchronize Pecos dataPoints with updated Approximation currentPoints

Private Attributes

- Pecos::BasisApproximation pecosBasisApprox

  and InterpPolyApproximation

- Pecos::PolynomialApproximation * polyApproxRep

  convenience pointer to representation

8.111.1 Detailed Description

Derived approximation class for global basis polynomials.

The PecosApproximation class provides a global approximation based on basis polynomials. This includes orthogonal polynomials used for polynomial chaos expansions and interpolation polynomials used for stochastic collocation.

The documentation for this class was generated from the following files:

- PecosApproximation.H

- PecosApproximation.C

8.112 ProblemDescDB Class Reference

The database containing information parsed from the DAKOTA input file.

Inheritance diagram for ProblemDescDB::



Public Member Functions

- ProblemDescDB ()

  default constructor

- ProblemDescDB (ParallelLibrary &parallel_lib)

  standard constructor

- ProblemDescDB (const ProblemDescDB &db)

  copy constructor

- ~ProblemDescDB ()

  destructor

- ProblemDescDB operator= (const ProblemDescDB &db)

  assignment operator

- void manage_inputs (CommandLineHandler &cmd_line_handler)

  normal API employed in main.C.

- void manage_inputs (const char *dakota_input_file, const char *parser_options=NULL, void(*callback)(void *)=NULL, void *callback_data=NULL)

  library_mode.C.

- void parse_inputs (const char *dakota_input_file, const char *parser_options=NULL, void(*callback)(void *)=NULL, void *callback_data=NULL)

  have been provided.

- void check_input ()

  keywords in the dakota input file. Used by parse_inputs().

- void broadcast ()

  data across the processor allocation. Used by manage_inputs().

- void post_process ()

  variables/responses specification arrays. Used by manage_inputs().

- void lock ()

  may not be set properly. Unlocked by a set nodes operation.

- void unlock ()

  Explicitly unlocks the database. Use with care.

- void set_db_list_nodes (const String &method_tag)

  this method specification to set all other list iterators.

- void set_db_list_nodes (const size_t &method_index)

  specification to set all other list iterators.

- void resolve_top_method ()

  to the top method and then sets the list nodes accordingly.

- void set_db_method_node (const String &method_tag)

  particular method specification (only).

- void set_db_method_node (const size_t &method_index)

  particular method specification (only).

- size_t get_db_method_node ()

  return the index of the active node in dataMethodList

- void set_db_model_nodes (const String &model_tag)

  identifier string

- void set_db_model_nodes (const size_t &model_index)

  within dataModelList

- size_t get_db_model_node ()

  return the index of the active node in dataModelList

- void set_db_variables_node (const String &variables_tag)

  set dataVariablesIter based on the variables identifier string

- void set_db_interface_node (const String &interface_tag)

  set dataInterfaceIter based on the interface identifier string

- void set_db_responses_node (const String &responses_tag)

  set dataResponsesIter based on the responses identifier string

- ParallelLibrary & parallel_library () const

return the parallelLib reference

- IteratorList & iterator_list ()

  return a list of all Iterator objects that have been instantiated

- ModelList & model_list ()

  return a list of all Model objects that have been instantiated

- VariablesList & variables_list ()

  return a list of all Variables objects that have been instantiated

- InterfaceList & interface_list ()

  return a list of all Interface objects that have been instantiated

- ResponseList & response_list ()

  return a list of all Response objects that have been instantiated

- const RealVector & get_rdv (const String &entry_name) const

  get a RealVector out of the database based on an identifier string

- const IntVector & get_idv (const String &entry_name) const

  get an IntVector out of the database based on an identifier string

- const UShortArray & get_dusa (const String &entry_name) const

  get an UShortArray out of the database based on an identifier string

- const RealSymMatrix & get_rsdm (const String &entry_name) const

  get a RealSymMatrix out of the database based on an identifier string

- const RealVectorArray & get_rdva (const String &entry_name) const

  identifier string

- const IntList & get_dil (const String &entry_name) const

  get an IntList out of the database based on an identifier string

- const IntSet & get_dis (const String &entry_name) const

  get an IntSet out of the database based on an identifier string

- const IntSetArray & get_disa (const String &entry_name) const

  get an IntSetArray out of the database based on an identifier string

- const RealSetArray & get_drsa (const String &entry_name) const

  get a RealSetArray out of the database based on an identifier string

- const StringArray & get_dsa (const String &entry_name) const

  get a StringArray out of the database based on an identifier string

- const String2DArray & get_ds2a (const String &entry_name) const
  get a String2DArray out of the database based on an identifier string
- const String & get_string (const String &entry_name) const
  get a String out of the database based on an identifier string
- const Real & get_real (const String &entry_name) const
  get a Real out of the database based on an identifier string
- int get_int (const String &entry_name) const
  get an int out of the database based on an identifier string
- short get_short (const String &entry_name) const
  get a short out of the database based on an identifier string
- unsigned short get_ushort (const String &entry_name) const
  get an unsigned short out of the database based on an identifier string
- size_t get_sizet (const String &entry_name) const
  get a size_t out of the database based on an identifier string
- bool get_bool (const String &entry_name) const
  get a bool out of the database based on an identifier string
- void ** get_voidss (const String &entry_name) const
  *for getting a void**, e.g., &dlLib*
- void insert_node (const DataStrategy &data_strategy)
  set the DataStrategy object
- void insert_node (const DataMethod &data_method)
  add a DataMethod object to the dataMethodList
- void insert_node (const DataModel &data_model)
  add a DataModel object to the dataModelList
- void insert_node (DataVariables &data_variables)
  add a DataVariables object to the dataVariablesList
- void insert_node (const DataInterface &data_interface)
  add a DataInterface object to the dataInterfaceList
- void insert_node (const DataResponses &data_responses)
  add a DataResponses object to the dataResponsesList

- void set (const String &entry_name, const RealVector &rdv)
  set a RealVector within the database based on an identifier string
- void set (const String &entry_name, const IntVector &idv)
  set an IntVector within the database based on an identifier string
- void set (const String &entry_name, const RealSymMatrix &rsdm)
  set a RealMatrix within the database based on an identifier string
- void set (const String &entry_name, const RealVectorArray &rdva)
  identifier string
- void set (const String &entry_name, const StringArray &dsa)
  set a StringArray within the database based on an identifier string
- bool is_null () const
  function to check dbRep (does this envelope contain a letter)

Protected Member Functions

- ProblemDescDB (BaseConstructor, ParallelLibrary &parallel_lib)
  derived class constructors - Coplien, p. 139)
- virtual void derived_parse_inputs (const char *dakota_input_file, const char *parser_options)
  derived class specifics within parse_inputs()
- virtual void derived_broadcast ()
  derived class specifics within broadcast()
- virtual void derived_post_process ()
  derived class specifics within post_process()

Protected Attributes

- DataStrategy strategySpec
  to strategy_kwhandler() or insert_node()
- std::list< DataMethod > dataMethodList
  or insert_node()
- std::list< DataModel > dataModelList
  or insert_node()

- std::list< DataVariables > dataVariablesList

  variables_kwhandler() or insert_node()

- std::list< DataInterface > dataInterfaceList

  interface_kwhandler() or insert_node()

- std::list< DataResponses > dataResponsesList

  responses_kwhandler() or insert_node()

- size_t strategyCntr

  counter for strategy specifications used in check_input

Private Member Functions

- const Iterator & get_iterator (Model &model)

  retrieve an existing Iterator, if it exists, or instantiate a new one

- const Model & get_model ()

  retrieve an existing Model, if it exists, or instantiate a new one

- const Variables & get_variables ()

  retrieve an existing Variables, if it exists, or instantiate a new one

- const Interface & get_interface ()

  retrieve an existing Interface, if it exists, or instantiate a new one

- const Response & get_response (const Variables &vars)

  retrieve an existing Response, if it exists, or instantiate a new one

- ProblemDescDB * get_db (ParallelLibrary &parallel_lib)

  Used by the envelope constructor to instantiate the correct letter class.

- void send_db_buffer ()

  and dataResponsesList. Used by manage_inputs().

- void receive_db_buffer ()

  and dataResponsesList. Used by manage_inputs().

Private Attributes

- ParallelLibrary & parallelLib

  reference to the parallel_lib object passed from main

- std::list< DataMethod >::iterator dataMethodIter

  iterator identifying the active list node in dataMethodList

- std::list< DataModel >::iterator dataModelIter

  iterator identifying the active list node in dataModelList

- std::list< DataVariables >::iterator dataVariablesIter

  iterator identifying the active list node in dataVariablesList

- std::list< DataInterface >::iterator dataInterfaceIter

  iterator identifying the active list node in dataInterfaceList

- std::list< DataResponses >::iterator dataResponsesIter

  iterator identifying the active list node in dataResponsesList

- IteratorList iteratorList

  list of iterator objects, one for each method specification

- ModelList modelList

  list of model objects, one for each model specification

- VariablesList variablesList

  list of variables objects, one for each variables specification

- InterfaceList interfaceList

  list of interface objects, one for each interface specification

- ResponseList responseList

  list of response objects, one for each responses specification

- bool methodDBLocked

  prior to setting the list node for the active method specification

- bool modelDBLocked

  prior to setting the list node for the active model specification

- bool variablesDBLocked

  prior to setting the list node for the active variables specification

- bool interfaceDBLocked

  prior to setting the list node for the active interface specification

- bool responsesDBLocked

  prior to setting the list node for the active responses specification

- ProblemDescDB * dbRep

pointer to the letter (initialized only for the envelope)

- int referenceCount

  number of objects sharing dbRep

Friends

- class Model

  Model requires access to get_variables() and get_response().

- class SingleModel

  SingleModel requires access to get_interface().

- class HierarchSurrModel

  HierarchSurrModel requires access to get_model().

- class DataFitSurrModel

  DataFitSurrModel requires access to get_iterator() and get_model().

- class NestedModel

  get_iterator(), and get_model()

- class Strategy

  Strategy requires access to get_iterator().

- class SingleMethodStrategy

  SingleMethodStrategy requires access to get_model().

- class HybridStrategy

  HybridStrategy requires access to get_model().

- class SequentialHybridStrategy

  SequentialStrategy requires access to get_iterator().

- class ConcurrentStrategy

  ConcurrentStrategy requires access to get_model().

- class SurrBasedLocalMinimizer

  SurrBasedLocalMinimizer requires access to get_iterator().

- class SurrBasedGlobalMinimizer

  SurrBasedGlobalMinimizer requires access to get_iterator().

8.112.1 Detailed Description

The database containing information parsed from the DAKOTA input file.

The ProblemDescDB class is a database for DAKOTA input file data that is populated by a parser defined in a derived class. When the parser reads a complete keyword, it populates a data class object (DataStrategy, DataMethod, DataVariables, DataInterface, or DataResponses) and, for all cases except strategy, appends the object to a linked list (dataMethodList, dataVariablesList, dataInterfaceList, or dataResponsesList). No strategy linked list is used since only one strategy specification is allowed.

8.112.2 Constructor & Destructor Documentation

8.112.2.1 ProblemDescDB ()

default constructor

The default constructor: dbRep is NULL in this case. This makes it necessary to check for NULL in the copy constructor, assignment operator, and destructor.

8.112.2.2 ProblemDescDB (ParallelLibrary & *parallel_lib*)

standard constructor

This is the envelope constructor which uses problem_db to build a fully populated db object. It only needs to extract enough data to properly execute get_db(problem_db), since the constructor overloaded with BaseConstructor builds the actual base class data inherited by the derived classes.

8.112.2.3 ProblemDescDB (const ProblemDescDB & *db*)

copy constructor

Copy constructor manages sharing of dbRep and incrementing of referenceCount.

8.112.2.4 ~ProblemDescDB ()

destructor

Destructor decrements referenceCount and only deletes dbRep when referenceCount reaches zero.

8.112.2.5 ProblemDescDB (BaseConstructor, ParallelLibrary & *parallel_lib*) [protected]

derived class constructors - Coplien, p. 139)

This constructor is the one which must build the base class data for all derived classes. get_db() instantiates a derived class letter and the derived constructor selects this base class constructor in its initialization list (to avoid the recursion of the base class constructor calling get_db() again). Since the letter IS the representation, its representation pointer is set to NULL (an uninitialized pointer causes problems in ~ProblemDescDB).

8.112.3 Member Function Documentation

8.112.3.1 ProblemDescDB operator= (const ProblemDescDB & *db*)

assignment operator

Assignment operator decrements referenceCount for old dbRep, assigns new dbRep, and increments reference-Count for new dbRep.

8.112.3.2 void manage_inputs (CommandLineHandler & *cmd_line_handler*)

normal API employed in main.C.

Manage command line inputs using the CommandLineHandler class and parse the input file.

8.112.3.3 void manage_inputs (const char * *dakota_input_file*, const char * *parser_options* = `NULL`, void(*)(void *) *callback* = `NULL`, void * *callback_data* = `NULL`)

library_mode.C.

Parse the input file, broadcast it to all processors, and post-process the data on all processors.

8.112.3.4 void parse_inputs (const char * *dakota_input_file*, const char * *parser_options* = `NULL`, void(*)(void *) *callback* = `NULL`, void * *callback_data* = `NULL`)

have been provided.

Parse the input file, execute the callback function (if present), and perform basic checks on keyword counts.

8.112.3.5 void post_process ()

variables/responses specification arrays. Used by manage_inputs().

When using library mode in a parallel application, post_process() should be called on all processors following broadcast() of a minimal problem specification.

8.112.3.6 ProblemDescDB * get_db (ParallelLibrary & *parallel_lib*) `[private]`

Used by the envelope constructor to instantiate the correct letter class.

Initializes dbRep to the appropriate derived type. The standard derived class constructors are invoked.

The documentation for this class was generated from the following files:

- ProblemDescDB.H
- ProblemDescDB.C

8.113 PStudyDACE Class Reference

design of experiments methods.

Inheritance diagram for PStudyDACE::

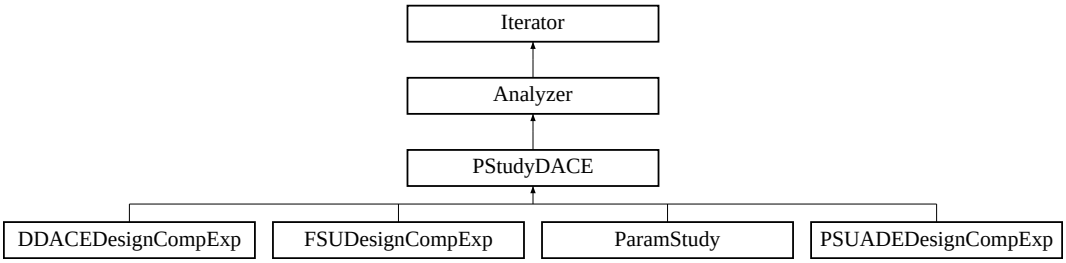

Protected Member Functions

- PStudyDACE (Model &model)

  constructor

- PStudyDACE (NoDBBaseConstructor, Model &model)

  alternate constructor for instantiations "on the fly"

- ~PStudyDACE ()

  destructor

- void run ()

  and may include pre/post steps in lieu of separate pre/post

- void print_results (std::ostream &s)

  print the final iterator results

- virtual void extract_trends ()=0

  Redefines the run_iterator virtual function for the PStudy/DACE branch.

- void volumetric_quality (int ndim, int num_samples, double *sample_points)

  Calculation of volumetric quality measures.

Protected Attributes

- SensAnalysisGlobal pStudyDACESensGlobal

  initialize statistical post processing

- bool volQualityFlag

flag which specifies evaluation of volumetric quality measures

- bool varBasedDecompFlag

  sensitivity analysis metrics

Private Attributes

- double chiMeas

  quality measure

- double dMeas

  quality measure

- double hMeas

  quality measure

- double tauMeas

  quality measure

8.113.1 Detailed Description

design of experiments methods.

The PStudyDACE base class manages common data and functions, such as those involving the best solutions located during the parameter set evaluations or the printing of final results.

8.113.2 Member Function Documentation

8.113.2.1 void run () `[inline, protected, virtual]`

and may include pre/post steps in lieu of separate pre/post

Virtual run function for the iterator class hierarchy. All derived classes need to redefine it.

Reimplemented from Iterator.

8.113.2.2 void print_results (std::ostream & *s*) `[protected, virtual]`

print the final iterator results

This virtual function provides additional iterator-specific final results outputs beyond the function evaluation summary printed in finalize_run().

Reimplemented from Analyzer.

8.113.2.3 void volumetric_quality (int *ndim*, int *num_samples*, double * *sample_points*) [protected]

Calculation of volumetric quality measures.

Calculation of volumetric quality measures developed by FSU.

The documentation for this class was generated from the following files:

- DakotaPStudyDACE.H
- DakotaPStudyDACE.C

8.114 PSUADEDesignCompExp Class Reference

Wrapper class for the PSUADE library.

Inheritance diagram for PSUADEDesignCompExp::



Public Member Functions

- PSUADEDesignCompExp (Model &model)

  primary constructor for building a standard DACE iterator

- ~PSUADEDesignCompExp ()

  destructor

- void pre_run ()

  which can generate all Variables (parameter sets) a priori

- void post_input ()

  read tabular data for post-run mode

- void extract_trends ()

  Redefines the run_iterator virtual function for the PStudy/DACE branch.

- void post_run (std::ostream &s)

  perform final analysis phase in a standalone way

- int num_samples () const

  get the current number of samples

- void sampling_reset (int min_samples, bool all_data_flag, bool stats_flag)

  reset sampling iterator to use at least min_samples

- const String & sampling_scheme () const

  return sampling name

- void vary_pattern (bool pattern_flag)

  sets varyPattern in derived classes that support it

- void get_parameter_sets (Model &model)

  Returns one block of samples (ndim ∗ num_samples).

Private Member Functions

- void enforce_input_rules ()

  enforce sanity checks/modifications for the user input specification

Private Attributes

- int samplesSpec

  initial specification of number of samples

- int numSamples

  current number of samples to be evaluated

- const UShortArray & varPartitionsSpec

  number of partitions in each variable direction

- int numPartitions

  number of partitions to pass to PSUADE (levels = partitions + 1)

- bool allDataFlag

  Iterator::all_variables() and Iterator::all_responses().

- size_t numDACERuns

  counter for number of run() executions for this object

- bool varyPattern

  but are still repeatable

- const int seedSpec

  (allows repeatable results)

- int randomSeed

  current seed for the random number generator

8.114.1 Detailed Description

Wrapper class for the PSUADE library.

The PSUADEDesignCompExp class provides a wrapper for PSUADE, a C++ design of experiments library from Lawrence Livermore National Laboratory. Currently this class only includes the PSUADE Morris One-at-a-time (MOAT) method to uniformly sample the parameter space spanned by the active bounds of the current Model. It returns all generated samples and their corresponding responses as well as the best sample found.

8.114.2 Constructor & Destructor Documentation

8.114.2.1 PSUADEDesignCompExp (Model & *model*)

primary constructor for building a standard DACE iterator

This constructor is called for a standard iterator built with data from probDescDB.

8.114.3 Member Function Documentation

8.114.3.1 void pre_run () [virtual]

which can generate all Variables (parameter sets) a priori

pre-run phase, which a derived iterator may optionally reimplement; when not present, pre-run is likely integrated into the derived run function. This is a virtual function; when re-implementing, a derived class must call its nearest parent's pre_run(), if implemented, typically _before_ performing its own implementation steps.

Reimplemented from Iterator.

8.114.3.2 void post_run (std::ostream & *s*) [virtual]

perform final analysis phase in a standalone way

Post-run phase, which a derived iterator may optionally reimplement; when not present, post-run is likely integrated into run. This is a virtual function; when re-implementing, a derived class must call its nearest parent's post_run(), typically _after_ performing its own implementation steps.

Reimplemented from Iterator.

8.114.3.3 int num_samples () const [inline, virtual]

get the current number of samples

Return current number of evaluation points. Since the calculation of samples, collocation points, etc. might be costly, provide a default implementation here that backs out from the maxConcurrency. May be (is) overridden by derived classes.

Reimplemented from Iterator.

8.114.3.4 void enforce_input_rules () [private]

enforce sanity checks/modifications for the user input specification

Users may input a variety of quantities, but this function must enforce any restrictions imposed by the sampling algorithms.

The documentation for this class was generated from the following files:

- PSUADEDesignCompExp.H
- PSUADEDesignCompExp.C

8.115 RecastBaseConstructor Struct Reference

instantiations.

Public Member Functions

- RecastBaseConstructor (int=0)

  C++ structs can have constructors.

8.115.1 Detailed Description

instantiations.

RecastBaseConstructor is used to overload the constructor used for on-the-fly Model instantiations. Putting this struct here avoids circular dependencies.

The documentation for this struct was generated from the following file:

- global_defs.h

8.116 RecastModel Class Reference

in order to recast the form of its inputs and/or outputs.

Inheritance diagram for RecastModel::



Public Member Functions

- RecastModel (Model &sub_model, const Sizet2DArray &vars_map_indices, bool nonlinear_vars_mapping, void(∗variables_map)(const Variables &recast_vars, Variables &sub_model_vars), void(∗set_map)(const ActiveSet &recast_set, ActiveSet &sub_model_set), const Sizet2DArray &primary_resp_map_indices, const Sizet2DArray &secondary_resp_map_indices, size_t recast_secondary_offset, const BoolDequeArray &nonlinear_resp_mapping, void(∗primary_resp_map)(const Variables &sub_model_vars, const Variables &recast_vars, const Response &sub_model_response, Response &recast_response), void(∗secondary_resp_map)(const Variables &sub_model_vars, const Variables &recast_vars, const Response &sub_model_response, Response &recast_response))

  standard constructor

- RecastModel (Model &sub_model, size_t num_recast_primary_fns, size_t num_recast_secondary_fns, size_t recast_secondary_offset)

  alternate constructor

- ∼RecastModel ()

  destructor

- void initialize (const Sizet2DArray &vars_map_indices, bool nonlinear_vars_mapping, void(∗variables_map)(const Variables &recast_vars, Variables &sub_model_vars), void(∗set_map)(const ActiveSet &recast_set, ActiveSet &sub_model_set), const Sizet2DArray &primary_resp_map_indices, const Sizet2DArray &secondary_resp_map_indices, const BoolDequeArray &nonlinear_resp_mapping, void(∗primary_resp_map)(const Variables &sub_model_vars, const Variables &recast_vars, const Response &sub_model_response, Response &recast_response), void(∗secondary_resp_map)(const Variables &sub_model_vars, const Variables &recast_vars, const Response &sub_model_response, Response &recast_response))

  completes initialization of the RecastModel after alternate construction

- void submodel_supports_estimated_derivatives (bool ssed_flag)

  override the submodel's derivative estimation behavior

Protected Member Functions

- void derived_compute_response (const ActiveSet &set)

  (forward to subModel.compute_response())

- void derived_asynch_compute_response (const ActiveSet &set)

  (forward to subModel.asynch_compute_response())

- const IntResponseMap & derived_synchronize ()

  (forward to subModel.synchronize())

- const IntResponseMap & derived_synchronize_nowait ()

  (forward to subModel.synchronize_nowait())

- Iterator & subordinate_iterator ()

  return sub-iterator, if present, within subModel

- Model & subordinate_model ()

  return subModel

- Model & surrogate_model ()

  return surrogate model, if present, within subModel

- Model & truth_model ()

  return truth model, if present, within subModel

- void derived_subordinate_models (ModelList &ml, bool recurse_flag)

  add subModel to list and recurse into subModel

- void update_from_subordinate_model (bool recurse_flag=true)

  pass request to subModel if recursing and then update from it

- Interface & interface ()

  return subModel interface

- void primary_response_fn_weights (const RealVector &wts, bool recurse_flag=true)

  squares terms and optionally recurses into subModel

- void surrogate_function_indices (const IntSet &surr_fn_indices)

  forward to subModel

- void surrogate_bypass (bool bypass_flag)

  models contained within this model

- void build_approximation ()

  builds the subModel approximation

- bool build_approximation (const Variables &vars, const Response &response)

  builds the subModel approximation

- void update_approximation (bool rebuild_flag)

  replaces data in the subModel approximation

- void update_approximation (const Variables &vars, const Response &response, bool rebuild_flag)

  replaces data in the subModel approximation

- void update_approximation (const VariablesArray &vars_array, const ResponseArray &resp_array, bool rebuild_flag)

  replaces data in the subModel approximation

- void append_approximation (bool rebuild_flag)

  appends data to the subModel approximation

- void append_approximation (const Variables &vars, const Response &response, bool rebuild_flag)

  appends data to the subModel approximation

- void append_approximation (const VariablesArray &vars_array, const ResponseArray &resp_array, bool rebuild_flag)

  appends data to the subModel approximation

- void pop_approximation (bool save_sdp_set)

  of SurrogateDataPoint set for use in restore_approximation()

- void restore_approximation ()

  restore a previous approximation data state within a surrogate

- bool restore_available ()

  query for whether a trial increment is restorable within a surrogate

- void finalize_approximation ()

  finalize an approximation by applying all previous trial increments

- std::vector< Approximation > & approximations ()

  retrieve the set of Approximations from the subModel

- const RealVectorArray & approximation_coefficients ()

  retrieve the approximation coefficients from the subModel

- void approximation_coefficients (const RealVectorArray &approx_coeffs)

  set the approximation coefficients within the subModel

- const RealVector & approximation_variances (const RealVector &c_vars)

retrieve the approximation variances from the subModel

- const SDPList & approximation_data (size_t index)

  retrieve the approximation data from the subModel

- void component_parallel_mode (short mode)

  virtual function redefinition is simply a sanity check.

- String local_eval_synchronization ()

  return subModel local synchronization setting

- int local_eval_concurrency ()

  return subModel local evaluation concurrency

- bool derived_master_overload () const

  evaluation (request forwarded to subModel)

- void derived_init_communicators (const int &max_iterator_concurrency, bool recurse_flag=true)

  set up RecastModel for parallel operations (request forwarded to subModel)

- void derived_init_serial ()

  set up RecastModel for serial operations (request forwarded to subModel).

- void derived_set_communicators (const int &max_iterator_concurrency, bool recurse_flag=true)

  set active parallel configuration within subModel

- void derived_free_communicators (const int &max_iterator_concurrency, bool recurse_flag=true)

  to subModel)

- void serve ()

  Completes when a termination message is received from stop_servers().

- void stop_servers ()

  when RecastModel iteration is complete.

- void inactive_view (short view, bool recurse_flag=true)

  context and optionally recurse into subModel

- const String & interface_id () const

  return the subModel interface identifier

- int evaluation_id () const

  forwarded to subModel)

- void set_evaluation_reference ()

  (request forwarded to subModel)

- void fine_grained_evaluation_counters ()

  request fine-grained evaluation reporting within subModel

- void print_evaluation_summary (std::ostream &s, bool minimal_header=false, bool relative_count=true) const

  forwarded to subModel)

Private Member Functions

- void set_mapping (const ActiveSet &recast_set, ActiveSet &sub_model_set)

  into sub_model_set for use with subModel.

- void update_from_sub_model ()

  update current variables/labels/bounds/targets from subModel

Private Attributes

- Model subModel

  the sub-model underlying the function pointers

- Sizet2DArray varsMapIndices

  subModel variables)

- bool nonlinearVarsMapping

  Hessians are managed per function, not per variable.

- bool respMapping

  are supplied

- Sizet2DArray primaryRespMapIndices

  to RecastModel Response).

- Sizet2DArray secondaryRespMapIndices

  to RecastModel response).

- BoolDequeArray nonlinearRespMapping

  augment the subModel function value/gradient requirements.

- IntActiveSetMap recastSetMap

  Needed for currentResponse update in synchronization routines.

- IntVariablesMap recastVarsMap

synchronization routines.

- IntVariablesMap subModelVarsMap

  synchronization routines.

- IntResponseMap recastResponseMap

  and RecastModel::derived_synchronize_nowait()

- void(∗ variablesMapping)(const Variables &recast_vars, Variables &sub_model_vars)

  holds pointer for variables mapping function passed in ctor/initialize

- void(∗ setMapping)(const ActiveSet &recast_set, ActiveSet &sub_model_set)

  holds pointer for set mapping function passed in ctor/initialize

- void(∗ primaryRespMapping)(const Variables &sub_model_vars, const Variables &recast_vars, const Response &sub_model_response, Response &recast_response)

  ctor/initialize

- void(∗ secondaryRespMapping)(const Variables &sub_model_vars, const Variables &recast_vars, const Response &sub_model_response, Response &recast_response)

  ctor/initialize

8.116.1 Detailed Description

in order to recast the form of its inputs and/or outputs.

The RecastModel class uses function pointers to allow recasting of the subModel input/output into new problem forms. This is currently used to recast SBO approximate subproblems, but can be used for multiobjective, input/output scaling, and other problem modifications in the future.

8.116.2 Constructor & Destructor Documentation

8.116.2.1 RecastModel (Model & *sub_model*, size_t *num_recast_primary_fns*, size_t *num_recast_secondary_fns*, size_t *recast_secondary_offset*)

alternate constructor

This alternate constructor defers initialization of the function pointers until a separate call to initialize(), and accepts the minimum information needed to construct currentVariables, currentResponse, and userDefinedConstraints. The resulting model is sufficiently complete for passing to an Iterator.

8.116.3 Member Function Documentation

8.116.3.1 void initialize (const Sizet2DArray & *vars_map_indices*, bool *nonlinear_vars_mapping*, void(∗)(const Variables &recast_vars, Variables &sub_model_vars) *variables_map*, void(∗)(const ActiveSet &recast_set, ActiveSet &sub_model_set) *set_map*, const Sizet2DArray & *primary_resp_map_indices*, const Sizet2DArray & *secondary_resp_map_indices*, const BoolDequeArray & *nonlinear_resp_mapping*, void(∗)(const Variables &sub_model_vars, const Variables &recast_vars, const Response &sub_model_response, Response &recast_response) *primary_resp_map*, void(∗)(const Variables &sub_model_vars, const Variables &recast_vars, const Response &sub_model_response, Response &recast_response) *secondary_resp_map*)

completes initialization of the RecastModel after alternate construction

This function is used for late initialization of the recasting functions. It is used in concert with the alternate constructor.

8.116.3.2 void update_from_sub_model () [private]

update current variables/labels/bounds/targets from subModel

Update inactive values and labels in currentVariables and inactive bound constraints in userDefinedConstraints from variables and constraints data within subModel.

The documentation for this class was generated from the following files:

- RecastModel.H
- RecastModel.C

8.117 Response Class Reference

Response provides the handle class.

Public Member Functions

- Response ()

  default constructor

- Response (const Variables &vars, const ProblemDescDB &problem_db)

  standard constructor built from problem description database

- Response (const ActiveSet &set)

  alternate constructor using limited data

- Response (const Response &response)

  copy constructor

- ~Response ()

  destructor

- Response operator= (const Response &response)

  assignment operator

- size_t num_functions () const

  return the number of response functions

- const ActiveSet & active_set () const

  return the active set

- void active_set (const ActiveSet &set)

  set the active set

- const ShortArray & active_set_request_vector () const

  return the active set request vector

- void active_set_request_vector (const ShortArray &asrv)

  set the active set request vector

- const SizetArray & active_set_derivative_vector () const

  return the active set derivative vector

- void active_set_derivative_vector (const SizetArray &asdv)

  set the active set derivative vector

- const String & responses_id () const

  return the response identifier

- const String & function_label (const size_t &i) const

  return a response function identifier string

- const StringArray & function_labels () const

  return the response function identifier strings

- void function_label (const String &label, const size_t &i)

  set a response function identifier string

- void function_labels (const StringArray &labels)

  set the response function identifier strings

- const Real & function_value (const size_t &i) const

  return a function value

- const RealVector & function_values () const

  return all function values

- void function_value (const Real &function_val, const size_t &i)

  set a function value

- void function_values (const RealVector &function_vals)

  set all function values

- RealVector function_gradient (const int &i) const

  return a function gradient as a Teuchos_SerialDenseVector VIEW

- RealVector function_gradient_copy (const int &i) const

  return a function gradient as a Teuchos::Copy vector (deep copy)

- const RealMatrix & function_gradients () const

  return all function gradients

- void function_gradient (const RealVector &function_grad, const int &i)

  set a function gradient

- void function_gradients (const RealMatrix &function_grads)

  set all function gradients

- const RealSymMatrix & function_hessian (const size_t &i) const

  return a function Hessian

- const RealSymMatrixArray & function_hessians () const

return all function Hessians

- void function_hessian (const RealSymMatrix &function_hessian, const size_t &i)

  set a function Hessian

- void function_hessians (const RealSymMatrixArray &function_hessians)

  set all function Hessians

- void read (std::istream &s)

  read a response object from an std::istream

- void write (std::ostream &s) const

  write a response object to an std::ostream

- void read_annotated (std::istream &s)

  read a response object in annotated format from an std::istream

- void write_annotated (std::ostream &s) const

  write a response object in annotated format to an std::ostream

- void read_tabular (std::istream &s)

  read responseRep::functionValues in tabular format from an std::istream

- void write_tabular (std::ostream &s) const

  write responseRep::functionValues in tabular format to an std::ostream

- void read (BiStream &s)

  read a response object from the binary restart stream

- void write (BoStream &s) const

  write a response object to the binary restart stream

- void read (MPIUnpackBuffer &s)

  read a response object from a packed MPI buffer

- void write (MPIPackBuffer &s) const

  write a response object to a packed MPI buffer

- Response copy () const

  a deep copy for use in history mechanisms

- int data_size ()

  handle class forward to corresponding body class member function

- void read_data (double *response_data)

  handle class forward to corresponding body class member function

- void write_data (double *response_data)

  handle class forward to corresponding body class member function

- void overlay (const Response &response)

  handle class forward to corresponding body class member function

- void update (const Response &response)

  different derivative array sizing between the two response objects.

- void update (const RealVector &source_fn_vals, const RealMatrix &source_fn_grads, const RealSymMatrixArray &source_fn_hessians, const ActiveSet &source_set)

  object. Care is taken to allow different derivative array sizing.

- void update_partial (size_t start_index_target, size_t num_items, const Response &response, size_t start_index_source)

  The response objects may have different numbers of response functions.

- void update_partial (size_t start_index_target, size_t num_items, const RealVector &source_fn_vals, const RealMatrix &source_fn_grads, const RealSymMatrixArray &source_fn_hessians, const ActiveSet &source_set, size_t start_index_source)

  of response functions.

- void reshape (const size_t &num_fns, const size_t &num_params, bool grad_flag, bool hess_flag)

  rehapes response data arrays

- void reset ()

  handle class forward to corresponding body class member function

- void reset_inactive ()

  handle class forward to corresponding body class member function

- bool is_null () const

  function to check responseRep (does this handle contain a body)

Private Attributes

- ResponseRep * responseRep

  pointer to the body (handle-body idiom)

Friends

- bool operator== (const Response &resp1, const Response &resp2)

  equality operator

- bool operator!= (const Response &resp1, const Response &resp2)

  inequality operator

8.117.1 Detailed Description

Response provides the handle class.

The Response class is a container class for an abstract set of functions (functionValues) and their first (functionGradients) and second (functionHessians) derivatives. The functions may involve objective and constraint functions (optimization data set), least squares terms (parameter estimation data set), or generic response functions (uncertainty quantification data set). It is not currently part of a class hierarchy, since the abstraction has been sufficiently general and has not required specialization. For memory efficiency, it employs the "handle-body idiom" approach to reference counting and representation sharing (see Coplien "Advanced C++", p. 58), for which Response serves as the handle and ResponseRep serves as the body.

8.117.2 Constructor & Destructor Documentation

8.117.2.1 Response ()

default constructor

Need a populated problem description database to build a meaningful Response object, so set the responseRep=NULL in default constructor for efficiency. This then requires a check on NULL in the copy constructor, assignment operator, and destructor.

The documentation for this class was generated from the following files:

- DakotaResponse.H
- DakotaResponse.C

8.118 ResponseRep Class Reference

ResponseRep provides the body class.

Private Member Functions

- ResponseRep ()

  default constructor

- ResponseRep (const Variables &vars, const ProblemDescDB &problem_db)

  standard constructor built from problem description database

- ResponseRep (const ActiveSet &set)

  alternate constructor using limited data

- ~ResponseRep ()

  destructor

- void read (std::istream &s)

  read a responseRep object from an std::istream

- void write (std::ostream &s) const

  write a responseRep object to an std::ostream

- void read_annotated (std::istream &s)

  read a responseRep object from an std::istream (annotated format)

- void write_annotated (std::ostream &s) const

  write a responseRep object to an std::ostream (annotated format)

- void read_tabular (std::istream &s)

  read functionValues from an std::istream (tabular format)

- void write_tabular (std::ostream &s) const

  write functionValues to an std::ostream (tabular format)

- void read (BiStream &s)

  read a responseRep object from a binary stream

- void write (BoStream &s) const

  write a responseRep object to a binary stream

- void read (MPIUnpackBuffer &s)

  read a responseRep object from a packed MPI buffer

- void write (MPIPackBuffer &s) const

  write a responseRep object to a packed MPI buffer

- int data_size ()

  double∗ response_data arrays passed into read_data and write_data.

- void read_data (double ∗response_data)

  read from an incoming double∗ array

- void write_data (double ∗response_data)

  write to an incoming double∗ array

- void overlay (const Response &response)

  add incoming response to functionValues/Gradients/Hessians

- void update (const RealVector &source_fn_vals, const RealMatrix &source_fn_grads, const RealSymMatrixArray &source_fn_hessians, const ActiveSet &source_set)

  update this response object from components of another response object

- void update_partial (size_t start_index_target, size_t num_items, const RealVector &source_fn_vals, const RealMatrix &source_fn_grads, const RealSymMatrixArray &source_fn_hessians, const ActiveSet &source_set, size_t start_index_source)

  another response object

- void reshape (const size_t &num_fns, const size_t &num_params, bool grad_flag, bool hess_flag)

  rehapes response data arrays

- void reset ()

  resets all response data to zero

- void reset_inactive ()

  resets all inactive response data to zero

- void active_set_request_vector (const ShortArray &asrv)

  of response functions

- void active_set_derivative_vector (const SizetArray &asdv)

  functionGradients/functionHessians if needed

Private Attributes

- int referenceCount

  number of handle objects sharing responseRep

- RealVector functionValues

abstract set of response functions

- RealMatrix functionGradients

  first derivatives of the response functions

- RealSymMatrixArray functionHessians

  second derivatives of the response functions

- ActiveSet responseActiveSet

  copy of the ActiveSet used by the Model to generate a Response instance

- StringArray functionLabels

  response function identifiers used to improve output readability

- String idResponses

  response identifier string from the input file

Friends

- class Response

  the handle class can access attributes of the body class directly

- bool operator== (const ResponseRep &rep1, const ResponseRep &rep2)

  equality operator

8.118.1 Detailed Description

ResponseRep provides the body class.

The ResponseRep class is the "representation" of the response container class. It is the "body" portion of the "handle-body idiom" (see Coplien "Advanced C++", p. 58). The handle class (Response) provides for memory efficiency in management of multiple response objects through reference counting and representation sharing. The body class (ResponseRep) actually contains the response data (functionValues, functionGradients, functionHessians, etc.). The representation is hidden in that an instance of ResponseRep may only be created by Response. Therefore, programmers create instances of the Response handle class, and only need to be aware of the handle/body mechanisms when it comes to managing shallow copies (shared representation) versus deep copies (separate representation used for history mechanisms).

8.118.2 Constructor & Destructor Documentation

8.118.2.1 ResponseRep (const Variables & *vars*, const ProblemDescDB & *problem_db*) [private]

standard constructor built from problem description database

The standard constructor used by Dakota::ModelRep.

8.118.2.2 ResponseRep (const ActiveSet & *set*) [private]

alternate constructor using limited data

Used for building a response object of the correct size on the fly (e.g., by slave analysis servers performing execute() on a local_response). functionLabels is not needed for this purpose since it's not passed in the MPI send/recv buffers. However, NPSOLOptimizer's user-defined functions option uses this constructor to build bestResponseArray.front() and bestResponseArray.front() needs functionLabels for I/O, so construction of functionLabels has been added.

8.118.3 Member Function Documentation

8.118.3.1 void read (std::istream & *s*) [private]

read a responseRep object from an std::istream

ASCII version of read needs capabilities for capturing data omissions or formatting errors (resulting from user error or asynch race condition) and analysis failures (resulting from nonconvergence, instability, etc.).

8.118.3.2 void write (std::ostream & *s*) const [private]

write a responseRep object to an std::ostream

ASCII version of write.

8.118.3.3 void read_annotated (std::istream & *s*) [private]

read a responseRep object from an std::istream (annotated format)

read_annotated() is used for neutral file translation of restart files. Since objects are built solely from this data, annotations are used. This version closely mirrors the BiStream version.

8.118.3.4 void write_annotated (std::ostream & *s*) const [private]

write a responseRep object to an std::ostream (annotated format)

write_annotated() is used for neutral file translation of restart files. Since objects need to be build solely from this data, annotations are used. This version closely mirrors the BoStream version, with the exception of the use of white space between fields.

8.118.3.5 void read_tabular (std::istream & *s*) [private]

read functionValues from an std::istream (tabular format)

read_tabular is used to read functionValues in tabular format. It is currently only used by ApproximationInterfaces in reading samples from a file. There is insufficient data in a tabular file to build complete response objects; rather, the response object must be constructed a priori and then its functionValues can be set.

8.118.3.6 void write_tabular (std::ostream & *s*) const [private]

write functionValues to an std::ostream (tabular format)

write_tabular is used for output of functionValues in a tabular format for convenience in post-processing/plotting of DAKOTA results.

8.118.3.7 void read (BiStream & *s*) [private]

read a responseRep object from a binary stream

Binary version differs from ASCII version in 2 primary ways: (1) it lacks formatting. (2) the Response has not been sized a priori. In reading data from the binary restart file, a ParamResponsePair was constructed with its default constructor which called the Response default constructor. Therefore, we must first read sizing data and resize all of the arrays.

8.118.3.8 void write (BoStream & *s*) const [private]

write a responseRep object to a binary stream

Binary version differs from ASCII version in 2 primary ways: (1) It lacks formatting. (2) In reading data from the binary restart file, ParamResponsePairs are constructed with their default constructor which calls the Response default constructor. Therefore, we must first write sizing data so that ResponseRep::read(BoStream& s) can resize the arrays.

8.118.3.9 void read (MPIUnpackBuffer & *s*) [private]

read a responseRep object from a packed MPI buffer

UnpackBuffer version differs from BiStream version in the omission of functionLabels. Master processor retains labels and interface ids and communicates asv and response data only with slaves.

8.118.3.10 void write (MPIPackBuffer & *s*) const [private]

write a responseRep object to a packed MPI buffer

MPIPackBuffer version differs from BoStream version only in the omission of functionLabels. The master processor retains labels and ids and communicates asv and response data only with slaves.

8.118.3.11 void update (const RealVector & *source_fn_vals*, const RealMatrix & *source_fn_grads*, const RealSymMatrixArray & *source_fn_hessians*, const ActiveSet & *source_set*) [private]

update this response object from components of another response object

Copy function values/gradients/Hessians data _only_. Prevents unwanted overwriting of responseActiveSet, functionLabels, etc. Also, care is taken to account for differences in derivative variable matrix sizing.

8.118.3.12 void update_partial (size_t *start_index_target*, size_t *num_items*, const RealVector & *source_fn_vals*, const RealMatrix & *source_fn_grads*, const RealSymMatrixArray & *source_fn_hessians*, const ActiveSet & *source_set*, size_t *start_index_source*) [private]

another response object

Copy function values/gradients/Hessians data _only_. Prevents unwanted overwriting of responseActiveSet, functionLabels, etc. Also, care is taken to account for differences in derivative variable matrix sizing.

8.118.3.13 void reshape (const size_t & *num_fns*, const size_t & *num_params*, bool *grad_flag*, bool *hess_flag*) [private]

rehapes response data arrays

Reshape functionValues, functionGradients, and functionHessians according to num_fns, num_params, grad_flag, and hess_flag.

8.118.3.14 void reset () [private]

resets all response data to zero

Reset all numerical response data (not labels, ids, or active set) to zero.

8.118.3.15 void reset_inactive () [private]

resets all inactive response data to zero

Used to clear out any inactive data left over from previous evaluations.

8.118.4 Member Data Documentation

8.118.4.1 RealMatrix functionGradients [private]

first derivatives of the response functions

the gradient vectors (plural) are column vectors in the matrix (singular) with (row, col) = (variable index, response fn index).

The documentation for this class was generated from the following files:

- DakotaResponse.H
- DakotaResponse.C

8.119 RichExtrapVerification Class Reference

Class for Richardson extrapolation for code and solution verification.

Inheritance diagram for RichExtrapVerification::



Public Member Functions

- RichExtrapVerification (Model &model)

  constructor

- ~RichExtrapVerification ()

  destructor

- void perform_verification ()

  Redefines the run_iterator virtual function for the PStudy/DACE branch.

- void print_results (std::ostream &s)

  print the final iterator results

Private Member Functions

- void estimate_order ()

  perform a single estimation of convOrder using extrapolation()

- void converge_order ()

  iterate using extrapolation() until convOrder stabilizes

- void converge_qoi ()

  iterate using extrapolation() until QOIs stabilize

- void extrapolation (const RealVector &refine_triple, RealMatrix &qoi_triples)

  estimate convOrder from refinement and quantity of interest (QOI) triples

- void extrapolate_result (const RealVector &refine_triple, const RealMatrix &qoi_triples)

  the value of Phi

Private Attributes

- short studyType

  CONVERGE_ORDER, or CONVERGE_QOI.

- size_t numFactors

  number of refinement factors defined from active state variables

- RealVector initialCVars

  initial reference values for refinement factors

- size_t factorIndex

  the index of the active factor

- Real refinementRate

  rate of mesh refinement (default = 2.)

- RealMatrix convOrder

  the orders of convergence of the QOIs (numFunctions by numFactors)

- RealMatrix extrapQOI

  the extrapolated value of the QOI (numFunctions by numFactors)

- RealMatrix numErrorQOI

  (numFunctions by numFactors)

- RealVector refinementRefPt

  in the final refinement triple.

8.119.1 Detailed Description

Class for Richardson extrapolation for code and solution verification.

The RichExtrapVerification class contains several algorithms for performing Richardson extrapolation.

8.119.2 Member Function Documentation

8.119.2.1 void print_results (std::ostream & *s*) `[virtual]`

print the final iterator results

This virtual function provides additional iterator-specific final results outputs beyond the function evaluation summary printed in finalize_run().

Reimplemented from Verification.

8.119.2.2 void estimate_order () [private]

perform a single estimation of convOrder using extrapolation()

This algorithm executes a single refinement triple and returns convergence order estimates.

8.119.2.3 void converge_order () [private]

iterate using extrapolation() until convOrder stabilizes

This algorithm continues to refine until the convergence order estimate converges.

8.119.2.4 void converge_qoi () [private]

iterate using extrapolation() until QOIs stabilize

This algorithm continues to refine until the discretization error lies within a prescribed tolerance.

The documentation for this class was generated from the following files:

- RichExtrapVerification.H
- RichExtrapVerification.C

8.120 SensAnalysisGlobal Class Reference

and variance-based decomposition

Public Member Functions

- SensAnalysisGlobal ()

  constructor

- ~SensAnalysisGlobal ()

  destructor

- void compute_correlations (const VariablesArray &vars_samples, const ResponseArray &resp_samples)

  simple, partial, simple rank, and partial rank

- void compute_correlations (const RealMatrix &vars_samples, const ResponseArray &resp_samples)

  simple, partial, simple rank, and partial rank

- bool correlations_computed () const

  has been invoked

- void print_correlations (std::ostream &s, StringMultiArrayConstView cv_labels, StringMultiArrayConstView div_labels, StringMultiArrayConstView drv_labels, const StringArray &resp_labels) const

  prints the correlations computed in compute_correlations()

Private Member Functions

- void simple_corr (RealMatrix &total_data, bool rank_on, const int &num_in)

  computes simple correlations

- void partial_corr (RealMatrix &total_data, bool rank_on, const int &num_in)

  computes partial correlations

Static Private Member Functions

- static bool rank_sort (const int &x, const int &y)

  sort algorithm to compute ranks for rank correlations

Private Attributes

- RealMatrix simpleCorr
  matrix to hold simple raw correlations
- RealMatrix simpleRankCorr
  matrix to hold simple rank correlations
- RealMatrix partialCorr
  matrix to hold partial raw correlations
- RealMatrix partialRankCorr
  matrix to hold partial rank correlations
- size_t numFns
  number of responses
- size_t numVars
  number of inputs
- bool numericalIssuesRaw
  flag indicating numerical issues in partial raw correlation calculations
- bool numericalIssuesRank
  flag indicating numerical issues in partial rank correlation calculations
- bool corrComputed
  flag indictaing whether correlations have been computed

Static Private Attributes

- static RealArray rawData
  array to hold temporary data before sort

8.120.1 Detailed Description

and variance-based decomposition

This class provides code for several of the sampling methods both in the NonD branch and in the PStudyDACE branch. Currently, the utility functions provide global sensitivity analysis through correlation calculations (e.g. simple, partial, rank, raw) as well as variance-based decomposition.

The documentation for this class was generated from the following files:

- SensAnalysisGlobal.H
- SensAnalysisGlobal.C

8.121 SequentialHybridStrategy Class Reference

models of varying fidelity.

Inheritance diagram for SequentialHybridStrategy::



Public Member Functions

- SequentialHybridStrategy (ProblemDescDB &problem_db)

  constructor

- ~SequentialHybridStrategy ()

  destructor

Protected Member Functions

- void run_strategy ()

  iterators on different models of varying fidelity

- const Variables & variables_results () const

  return the final solution from selectedIterators (variables)

- const Response & response_results () const

  return the final solution from selectedIterators (response)

- void initialize_iterator (int job_index)

  scheduling function (serve_iterators() or static_schedule_iterators())

- void pack_parameters_buffer (MPIPackBuffer &send_buffer, int job_index)

  pack a send_buffer for assigning an iterator job to a server

- void unpack_parameters_buffer (MPIUnpackBuffer &recv_buffer)

  unpack a recv_buffer for accepting an iterator job from the scheduler

- void pack_results_buffer (MPIPackBuffer &send_buffer, int job_index)

  pack a send_buffer for returning iterator results from a server

- void unpack_results_buffer (MPIUnpackBuffer &recv_buffer, int job_index)

  unpack a recv_buffer for accepting iterator results from a server

- void update_local_results (int job_index)

  update local PRP results arrays with current iteration results

Private Member Functions

- void run_sequential ()

  run a sequential hybrid

- void run_sequential_adaptive ()

  run a sequential adaptive hybrid

- void partition_sets (size_t num_sets, int job_index, size_t &start_index, size_t &job_size)

  extraction from parameterSets

- void extract_parameter_sets (int job_index, VariablesArray &partial_param_sets)

  extract partial_param_sets from parameterSets based on job_index

- void update_local_results (PRPArray &prp_results, int job_id)

  update the partial set of final results from the local iterator execution

- void initialize_iterator (const VariablesArray &param_sets)

  initialize_iterator(int) to update the active Model and Iterator

Private Attributes

- String hybridType

  sequential or sequential_adaptive

- size_t seqCount

  hybrid sequence counter: 0 to numIterators-1

- Real progressMetric

  a sequential adaptive hybrid

- Real progressThreshold

  sequential adaptive hybrid switches to the next method

- PRP2DArray prpResults

  of results per job (iterators may return multiple final solutions)

- VariablesArray parameterSets

  1-D array of variable starting points for the iterator jobs

8.121.1 Detailed Description

models of varying fidelity.

The sequential hybrid minimization strategy has two approaches: (1) the non-adaptive sequential hybrid runs one method to completion, passes its best results as the starting point for a subsequent method, and continues this succession until all methods have been executed (the stopping rules are controlled internally by each minimizer), and (2) the adaptive sequential hybrid uses adaptive stopping rules for the minimizers that are controlled externally by the strategy. Note that while the strategy is targeted at minimizers, any iterator may be used so long as it defines the notion of a final solution which can be passed as the starting point for subsequent iterators.

8.121.2 Member Function Documentation

8.121.2.1 void pack_parameters_buffer (MPIPackBuffer & *send_buffer*, int *job_index*) [inline, protected, virtual]

pack a send_buffer for assigning an iterator job to a server

This virtual function redefinition is executed on the dedicated master processor for self scheduling. It is not used for peer partitions.

Reimplemented from Strategy.

8.121.2.2 void unpack_parameters_buffer (MPIUnpackBuffer & *recv_buffer*) [inline, protected, virtual]

unpack a recv_buffer for accepting an iterator job from the scheduler

This virtual function redefinition is executed on an iterator server for dedicated master self scheduling. It is not used for peer partitions.

Reimplemented from Strategy.

8.121.2.3 void pack_results_buffer (MPIPackBuffer & *send_buffer*, int *job_index*) [inline, protected, virtual]

pack a send_buffer for returning iterator results from a server

This virtual function redefinition is executed either on an iterator server for dedicated master self scheduling or on peers 2 through n for static scheduling.

Reimplemented from Strategy.

8.121.2.4 void unpack_results_buffer (MPIUnpackBuffer & *recv_buffer*, int *job_index*) [inline, protected, virtual]

unpack a recv_buffer for accepting iterator results from a server

This virtual function redefinition is executed on an strategy master (either the dedicated master processor for self scheduling or peer 1 for static scheduling).

Reimplemented from Strategy.

8.121.2.5 void run_sequential () [private]

run a sequential hybrid

In the sequential nonadaptive case, there is no interference with the iterators. Each runs until its own convergence criteria is satisfied. Status: fully operational.

8.121.2.6 void run_sequential_adaptive () [private]

run a sequential adaptive hybrid

In the sequential adaptive case, there is interference with the iterators through the use of the ++ overloaded operator. iterator++ runs the iterator for one cycle, after which a progress_metric is computed. This progress metric is used to dictate method switching instead of each iterator's internal convergence criteria. Status: incomplete.

8.121.2.7 void extract_parameter_sets (int *job_index*, VariablesArray & *partial_param_sets*) [inline, private]

extract partial_param_sets from parameterSets based on job_index

This convenience function is executed on an iterator master (static scheduling) or a strategy master (self scheduling) at run initialization time and has access to the full parameterSets array (this is All-Reduced for all peers at the completion of each cycle in run_sequential()).

The documentation for this class was generated from the following files:

- SequentialHybridStrategy.H
- SequentialHybridStrategy.C

8.122 SerialDirectApplicInterface Class Reference

plug-ins using assign_rep().

Inheritance diagram for SerialDirectApplicInterface::



Public Member Functions

- SerialDirectApplicInterface (const Dakota::ProblemDescDB &problem_db)

  constructor

- ~SerialDirectApplicInterface ()

  destructor

Protected Member Functions

- int derived_map_ac (const Dakota::String &ac_name)

  execute an analysis code portion of a direct evaluation invocation

8.122.1 Detailed Description

plug-ins using assign_rep().

The plug-in SerialDirectApplicInterface resides in namespace SIM and uses a copy of rosenbrock() to perform serial parameter to response mappings. It may be activated by specifying the –with-plugin configure option, which activates the DAKOTA_PLUGIN macro in dakota_config.h used by main.C (which activates the plug-in code block within that file) and activates the PLUGIN_S declaration defined in Makefile.include and used in Makefile.source (which add this class to the build). Test input files should then use an analysis_driver of "plugin_-rosenbrock".

The documentation for this class was generated from the following files:

- PluginSerialDirectApplicInterface.H
- PluginSerialDirectApplicInterface.C

8.123 SharedVariablesData Class Reference

among a set of Variables instances.

Public Member Functions

- SharedVariablesData ()
  default constructor
- SharedVariablesData (const ProblemDescDB &problem_db, const std::pair< short, short > &view)
  standard constructor
- SharedVariablesData (const std::pair< short, short > &view, const SizetArray &vars_comps_totals)
  lightweight constructor
- SharedVariablesData (const SharedVariablesData &svd)
  copy constructor
- ~SharedVariablesData ()
  destructor
- SharedVariablesData & operator= (const SharedVariablesData &svd)
  assignment operator
- void size_all_continuous_labels (bool relax)
  discrete relaxation
- void initialize_all_continuous_types (bool relax)
  discrete relaxation
- void initialize_all_continuous_ids (bool relax)
  discrete relaxation
- void size_all_discrete_int_labels ()
  size labels for all of the discrete integer variables
- void initialize_all_discrete_int_types ()
  initialize types for all of the discrete integer variables
- void size_all_discrete_real_labels ()
  size labels for all of the discrete real variables
- void initialize_all_discrete_real_types ()
  initialize types for all of the discrete real variables

- StringMultiArrayView all_continuous_labels (size_t start, size_t num_items) const

  get num_items continuous labels beginning at index start

- void all_continuous_labels (StringMultiArrayConstView cv_labels, size_t start, size_t num_items)

  set num_items continuous labels beginning at index start

- void all_continuous_label (const String &cv_label, size_t index)

  set continuous label at index start

- StringMultiArrayView all_discrete_int_labels (size_t start, size_t num_items) const

  get num_items discrete integer labels beginning at index start

- void all_discrete_int_labels (StringMultiArrayConstView div_labels, size_t start, size_t num_items)

  set num_items discrete integer labels beginning at index start

- void all_discrete_int_label (const String &div_label, size_t index)

  set discrete integer label at index start

- StringMultiArrayView all_discrete_real_labels (size_t start, size_t num_items) const

  get num_items discrete real labels beginning at index start

- void all_discrete_real_labels (StringMultiArrayConstView drv_labels, size_t start, size_t num_items)

  set num_items discrete real labels beginning at index start

- void all_discrete_real_label (const String &drv_label, size_t index)

  set discrete real label at index start

- UShortMultiArrayConstView all_continuous_types (size_t start, size_t num_items) const

  get num_items continuous types beginning at index start

- UShortMultiArrayConstView all_discrete_int_types (size_t start, size_t num_items) const

  get num_items discrete integer types beginning at index start

- UShortMultiArrayConstView all_discrete_real_types (size_t start, size_t num_items) const

  get num_items discrete real types beginning at index start

- SizetMultiArrayConstView all_continuous_ids (size_t start, size_t num_items) const

  get num_items continuous ids beginning at index start

- const SizetArray & merged_discrete_ids () const

  get ids of discrete variables that have been merged into continuous arrays

- const std::pair< short, short > & view () const

  retreive the Variables view

- void inactive_view (short view2)

set the inactive Variables view

- const String & id () const

  return the user-provided or default Variables identifier

- const SizetArray & components_totals () const

  {design,aleatory uncertain,epistemic uncertain,state}

- size_t vc_lookup (unsigned short key) const

  svdRep->variablesComponents corresponding to key

Private Attributes

- SharedVariablesDataRep * svdRep

  pointer to the body (handle-body idiom)

8.123.1 Detailed Description

among a set of Variables instances.

An array of Variables objects (e.g., Analyzer::allVariables) contains repeated configuration data (id's, labels, counts). SharedVariablesData employs a handle-body idiom to allow this shared data to be managed in a single object with many references to it, one per Variables object in the array. This allows scaling to larger sample sets.

The documentation for this class was generated from the following file:

- SharedVariablesData.H

8.124 SharedVariablesDataRep Class Reference

or body, may be shared by multiple SharedVariablesData handle instances.

Private Member Functions

- SharedVariablesDataRep (const ProblemDescDB &problem_db, const std::pair< short, short > &view)
  standard constructor
- SharedVariablesDataRep (const std::pair< short, short > &view, const SizetArray &vars_comps_totals)
  lightweight constructor
- ~SharedVariablesDataRep ()
  destructor
- void size_all_continuous_labels (bool relax)
  size allContinuousLabels, with or without discrete relaxation
- void initialize_all_continuous_types (bool relax)
  initialize allContinuousTypes, with or without discrete relaxation
- void initialize_all_continuous_ids (bool relax)
  initialize allContinuousIds, with or without discrete relaxation
- void size_all_discrete_int_labels ()
  size allDiscreteIntLabels
- void initialize_all_discrete_int_types ()
  initialize allDiscreteIntTypes
- void size_all_discrete_real_labels ()
  size allDiscreteRealLabels
- void initialize_all_discrete_real_types ()
  initialize allDiscreteRealTypes
- size_t vc_lookup (unsigned short key) const
  retrieve the count within variablesComponents corresponding to key

Private Attributes

- String idVariables
  variables identifier string from the input file

- std::pair< short, short > variablesView
  view enumerations
- std::map< unsigned short, size_t > variablesComponents
  map linking variable types to counts
- SizetArray variablesCompsTotals
  {design,aleatory uncertain,epistemic uncertain,state}
- StringMultiArray allContinuousLabels
  array of variable labels for all of the continuous variables
- StringMultiArray allDiscreteIntLabels
  array of variable labels for all of the discrete integer variables
- StringMultiArray allDiscreteRealLabels
  array of variable labels for all of the discrete real variables
- UShortMultiArray allContinuousTypes
  array of variable types for all of the continuous variables
- UShortMultiArray allDiscreteIntTypes
  array of variable types for all of the discrete integer variables
- UShortMultiArray allDiscreteRealTypes
  array of variable types for all of the discrete real variables
- SizetMultiArray allContinuousIds
  variables array
- SizetArray mergedDiscreteIds
  requirement is relaxed by merging them into a continuous array
- int referenceCount
  number of handle objects sharing svdRep

Friends

- class **SharedVariablesData**

8.124.1 Detailed Description

or body, may be shared by multiple SharedVariablesData handle instances.

The SharedVariablesData/SharedVariablesDataRep pairs utilize a handle-body idiom (Coplien, Advanced C++).

8.124.2 Constructor & Destructor Documentation

8.124.2.1 SharedVariablesDataRep (const ProblemDescDB & *problem_db*, const std::pair< short, short > & *view*) [private]

standard constructor

This constructor is the one which must build the base class data for all derived classes. get_variables() instantiates a derived class letter and the derived constructor selects this base class constructor in its initialization list (to avoid the recursion of the base class constructor calling get_variables() again). Since the letter IS the representation, its representation pointer is set to NULL (an uninitialized pointer causes problems in ∼Variables).

8.124.3 Member Data Documentation

8.124.3.1 SizetMultiArray allContinuousIds [private]

variables array

These identifiers define positions of the all continuous variables array within the total variable sequence.

The documentation for this class was generated from the following files:

- SharedVariablesData.H
- SharedVariablesData.C

8.125 SingleMethodStrategy Class Reference

single model.

Inheritance diagram for SingleMethodStrategy::



Public Member Functions

- SingleMethodStrategy (ProblemDescDB &problem_db)

  constructor

- ~SingleMethodStrategy ()

  destructor

- void run_strategy ()

  Perform the strategy by executing selectedIterator on userDefinedModel.

- const Variables & variables_results () const

  return the final solution from selectedIterator (variables)

- const Response & response_results () const

  return the final solution from selectedIterator (response)

Private Attributes

- Model userDefinedModel

  the model to be iterated

- Iterator selectedIterator

  the iterator

8.125.1 Detailed Description

single model.

This strategy executes a single iterator on a single model. Since it does not provide coordination for multiple iterators and models, it can considered to be a "fall-through" strategy in that it allows control to fall through immediately to the iterator.

The documentation for this class was generated from the following files:

- SingleMethodStrategy.H
- SingleMethodStrategy.C

8.126 SingleModel Class Reference

variables into responses.

Inheritance diagram for SingleModel::



Public Member Functions

- SingleModel (ProblemDescDB &problem_db)

  constructor

- ~SingleModel ()

  destructor

Protected Member Functions

- Interface & interface ()

  return userDefinedInterface

- void derived_compute_response (const ActiveSet &set)

  (invokes a synchronous map() on userDefinedInterface)

- void derived_asynch_compute_response (const ActiveSet &set)

  (invokes an asynchronous map() on userDefinedInterface)

- const IntResponseMap & derived_synchronize ()

  (invokes synch() on userDefinedInterface)

- const IntResponseMap & derived_synchronize_nowait ()

  (invokes synch_nowait() on userDefinedInterface)

- void component_parallel_mode (short mode)

  so this virtual function redefinition is simply a sanity check.

- String local_eval_synchronization ()

  return userDefinedInterface synchronization setting

- int local_eval_concurrency ()

return userDefinedInterface asynchronous evaluation concurrency

- bool derived_master_overload () const

  evaluation (request forwarded to userDefinedInterface)

- void derived_init_communicators (const int &max_iterator_concurrency, bool recurse_flag=true)

  userDefinedInterface)

- void derived_init_serial ()

  userDefinedInterface).

- void derived_set_communicators (const int &max_iterator_concurrency, bool recurse_flag=true)

  (request forwarded to userDefinedInterface)

- void derived_free_communicators (const int &max_iterator_concurrency, bool recurse_flag=true)

  (request forwarded to userDefinedInterface)

- void serve ()

  Completes when a termination message is received from stop_servers().

- void stop_servers ()

  operations when SingleModel iteration is complete.

- const String & interface_id () const

  return the userDefinedInterface identifier

- int evaluation_id () const

  (request forwarded to userDefinedInterface)

- void set_evaluation_reference ()

  (request forwarded to userDefinedInterface)

- void fine_grained_evaluation_counters ()

  request fine-grained evaluation reporting within the userDefinedInterface

- void print_evaluation_summary (std::ostream &s, bool minimal_header=false, bool relative_count=true) const

  (request forwarded to userDefinedInterface)

Private Attributes

- Interface userDefinedInterface

  the interface used for mapping variables to responses

8.126.1 Detailed Description

variables into responses.

The SingleModel class is the simplest of the derived model classes. It provides the capabilities of the original Model class, prior to the development of surrogate and nested model extensions. The derived response computation and synchronization functions utilize a single interface to perform the function evaluations.

The documentation for this class was generated from the following files:

- SingleModel.H
- SingleModel.C

8.127 SNLLBase Class Reference

Base class for OPT++ optimization and least squares methods.

Inheritance diagram for SNLLBase::



Public Member Functions

- SNLLBase ()

  default constructor

- SNLLBase (Model &model)

  standard constructor

- ~SNLLBase ()

  destructor

Protected Member Functions

- void copy_con_vals (const RealVector &local_fn_vals, NEWMAT::ColumnVector &g, const size_t &offset)

  constraint evaluator functions

- void copy_con_vals (const NEWMAT::ColumnVector &g, RealVector &local_fn_vals, const size_t &offset)

  final solution logging

- void copy_con_grad (const RealMatrix &local_fn_grads, NEWMAT::Matrix &grad_g, const size_t &offset)

  used by constraint evaluator functions

- void copy_con_hess (const RealSymMatrixArray &local_fn_hessians, OPTPP::OptppArray< NEWMAT::SymmetricMatrix > &hess_g, const size_t &offset)

  used by constraint evaluator functions

- void snll_pre_instantiate (const String &merit_fn, bool bound_constr_flag, const int &num_constr)

  method instantiation

- void snll_post_instantiate (const int &num_cv, bool vendor_num_grad_flag, const String &finite_diff_-type, const Real &fdss, const int &max_iter, const int &max_fn_evals, const Real &conv_tol, const Real &grad_tol, const Real &max_step, bool bound_constr_flag, const int &num_constr, short output_-lev, OPTPP::OptimizeClass *the_optimizer, OPTPP::NLP0 *nlf_objective, OPTPP::FDNLF1 *fd_nlf1, OPTPP::FDNLF1 *fd_nlf1_con)

  method instantiation

- void snll_initialize_run (OPTPP::NLP0 *nlf_objective, OPTPP::NLP *nlp_constraint, const RealVector &init_pt, bool bound_constr_flag, const RealVector &lower_bnds, const RealVector &upper_bnds, const RealMatrix &lin_ineq_coeffs, const RealVector &lin_ineq_l_bnds, const RealVector &lin_ineq_u_bnds, const RealMatrix &lin_eq_coeffs, const RealVector &lin_eq_targets, const RealVector &nln_ineq_l_bnds, const RealVector &nln_ineq_u_bnds, const RealVector &nln_eq_targets)

  method invocation

- void snll_post_run (OPTPP::NLP0 *nlf_objective)

  method instantiations

Static Protected Member Functions

- static void init_fn (int n, NEWMAT::ColumnVector &x)

  An initialization mechanism provided by OPT++ (not currently used).

Protected Attributes

- String searchMethod

  trust_region, or tr_pds

- OPTPP::SearchStrategy searchStrat

  enum: LineSearch, TrustRegion, or TrustPDS

- OPTPP::MeritFcn meritFn

  enum: NormFmu, ArgaezTapia, or VanShanno

- bool constantASVFlag

  this into mode override, reliance on duplicate detection can be avoided.

Static Protected Attributes

- static Minimizer * optLSqInstance

  evaluator functions in order to avoid the need for static data

- static bool modeOverrideFlag

Hessian requests).

- static EvalType lastFnEvalLocn

  evaluator was the last location of a function evaluation

- static int lastEvalMode

  copy of mode from constraint evaluators

- static RealVector lastEvalVars

  copy of variables from constraint evaluators

8.127.1 Detailed Description

Base class for OPT++ optimization and least squares methods.

The SNLLBase class provides a common base class for SNLLOptimizer and SNLLLeastSq, both of which are wrappers for OPT++, a C++ optimization library from the Computational Sciences and Mathematics Research (CSMR) department at Sandia's Livermore CA site.

The documentation for this class was generated from the following files:

- SNLLBase.H
- SNLLBase.C

8.128 SNLLLeastSq Class Reference

Wrapper class for the OPT++ optimization library.

Inheritance diagram for SNLLLeastSq::

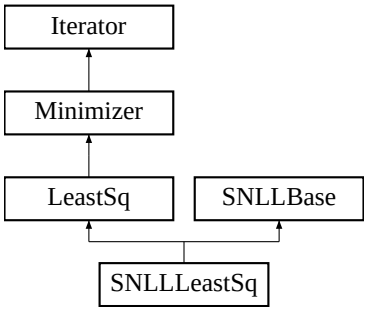

Public Member Functions

- SNLLLeastSq (Model &model)

  standard constructor

- SNLLLeastSq (const String &method_name, Model &model)

  alternate constructor for instantiations without ProblemDescDB support

- ~SNLLLeastSq ()

  destructor

- void minimize_residuals ()

  Performs the iterations to determine the least squares solution.

Protected Member Functions

- void initialize_run ()

  SNLLBase::snll_initialize_run(), and performs other set-up.

- void post_run (std::ostream &s)

  and directly invokes Iterator::post_run when complete

- void finalize_run ()

  restores instances

Static Private Member Functions

- static void nlf2_evaluator_gn (int mode, int n, const NEWMAT::ColumnVector &x, NEWMAT::Real &f, NEWMAT::ColumnVector &grad_f, NEWMAT::SymmetricMatrix &hess_f, int &result_mode)

  value, gradient, and Hessian using the Gauss-Newton approximation.

- static void constraint1_evaluator_gn (int mode, int n, const NEWMAT::ColumnVector &x, NEWMAT::ColumnVector &g, NEWMAT::Matrix &grad_g, int &result_mode)

  values and gradients to OPT++ Gauss-Newton methods.

- static void constraint2_evaluator_gn (int mode, int n, const NEWMAT::ColumnVector &x, NEWMAT::ColumnVector &g, NEWMAT::Matrix &grad_g, OPTPP::OptppArray< NEWMAT::SymmetricMatrix > &hess_g, int &result_mode)

  values, gradients, and Hessians to OPT++ Gauss-Newton methods.

Private Attributes

- SNLLLeastSq * prevSnllLSqInstance

  restoration in the case of iterator/model recursion

- OPTPP::NLP0 * nlfObjective

  objective NLF base class pointer

- OPTPP::NLP0 * nlfConstraint

  constraint NLF base class pointer

- OPTPP::NLP * nlpConstraint

  constraint NLP pointer

- OPTPP::NLF2 * nlf2

  pointer to objective NLF for full Newton optimizers

- OPTPP::NLF2 * nlf2Con

  pointer to constraint NLF for full Newton optimizers

- OPTPP::NLF1 * nlf1Con

  pointer to constraint NLF for Quasi Newton optimizers

- OPTPP::OptimizeClass * theOptimizer

  optimizer base class pointer

- OPTPP::OptNewton * optnewton

  Newton optimizer pointer.

- OPTPP::OptBCNewton * optbcnewton

Bound constrained Newton optimizer ptr.

- OPTPP::OptDHNIPS * optdhnips

  Disaggregated Hessian NIPS optimizer ptr.

Static Private Attributes

- static SNLLLeastSq * snllLSqInstance

  functions in order to avoid the need for static data

8.128.1 Detailed Description

Wrapper class for the OPT++ optimization library.

The SNLLLeastSq class provides a wrapper for OPT++, a C++ optimization library of nonlinear programming and pattern search techniques from the Computational Sciences and Mathematics Research (CSMR) department at Sandia's Livermore CA site. It uses a function pointer approach for which passed functions must be either global functions or static member functions. Any attribute used within static member functions must be either local to that function, a static member, or accessed by static pointer.

The user input mappings are as follows: `max_iterations`, `max_function_evaluations`, `convergence_tolerance`, `max_step`, `gradient_tolerance`, `search_method`, and `search_scheme_size` are set using OPT++'s setMaxIter(), setMaxFeval(), setFcnTol(), setMaxStep(), setGradTol(), setSearchStrategy(), and setSSS() member functions, respectively; `output` verbosity is used to toggle OPT++'s debug mode using the setDebug() member function. Internal to OPT++, there are 3 search strategies, while the DAKOTA `search_method` specification supports 4 (`value_based_line_search`, `gradient_based_line_search`, `trust_region`, or `tr_pds`). The difference stems from the "is_expensive" flag in OPT++. If the search strategy is LineSearch and "is_expensive" is turned on, then the `value_based_line_search` is used. Otherwise (the "is_expensive" default is off), the algorithm will use the `gradient_based_line_search`. Refer to [Meza, J.C., 1994] and to the OPT++ source in the Dakota/packages/OPTPP directory for information on OPT++ class member functions.

8.128.2 Member Function Documentation

8.128.2.1 void nlf2_evaluator_gn (int *mode*, int *n*, const NEWMAT::ColumnVector & *x*, NEWMAT::Real & *f*, NEWMAT::ColumnVector & *grad_f*, NEWMAT::SymmetricMatrix & *hess_f*, int & *result_mode*) `[static, private]`

value, gradient, and Hessian using the Gauss-Newton approximation.

This nlf2 evaluator function is used for the Gauss-Newton method in order to exploit the special structure of the nonlinear least squares problem. Here, fx = sum (T_i - Tbar_i)^2 and Response is made up of residual functions and their gradients along with any nonlinear constraints. The objective function and its gradient vector and Hessian matrix are computed directly from the residual functions and their derivatives (which are returned from the Response object).

8.128.2.2 void constraint1_evaluator_gn (int *mode*, int *n*, const NEWMAT::ColumnVector & *x*, NEWMAT::ColumnVector & *g*, NEWMAT::Matrix & *grad_g*, int & *result_mode*) [static, private]

values and gradients to OPT++ Gauss-Newton methods.

While it does not employ the Gauss-Newton approximation, it is distinct from constraint1_evaluator() due to its need to anticipate the required modes for the least squares terms. This constraint evaluator function is used with diaggregated Hessian NIPS and is currently active.

8.128.2.3 void constraint2_evaluator_gn (int *mode*, int *n*, const NEWMAT::ColumnVector & *x*, NEWMAT::ColumnVector & *g*, NEWMAT::Matrix & *grad_g*, OPTPP::OptppArray< NEWMAT::SymmetricMatrix > & *hess_g*, int & *result_mode*) [static, private]

values, gradients, and Hessians to OPT++ Gauss-Newton methods.

While it does not employ the Gauss-Newton approximation, it is distinct from constraint2_evaluator() due to its need to anticipate the required modes for the least squares terms. This constraint evaluator function is used with full Newton NIPS and is currently inactive.

The documentation for this class was generated from the following files:

- SNLLLeastSq.H
- SNLLLeastSq.C

8.129 SNLLOptimizer Class Reference

Wrapper class for the OPT++ optimization library.

Inheritance diagram for SNLLOptimizer::

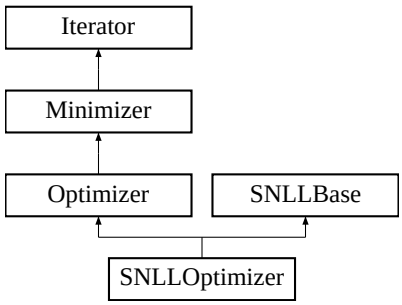

Public Member Functions

- SNLLOptimizer (Model &model)

  standard constructor

- SNLLOptimizer (const String &method_name, Model &model)

  alternate constructor for instantiations "on the fly"

- SNLLOptimizer (const RealVector &initial_pt, const RealVector &var_l_bnds, const RealVector &var_u_bnds, const RealMatrix &lin_ineq_coeffs, const RealVector &lin_ineq_l_bnds, const RealVector &lin_ineq_u_bnds, const RealMatrix &lin_eq_coeffs, const RealVector &lin_eq_tgts, const RealVector &nln_ineq_l_bnds, const RealVector &nln_ineq_u_bnds, const RealVector &nln_eq_tgts, void(∗user_obj_eval)(int mode, int n, const NEWMAT::ColumnVector &x, NEWMAT::Real &f, NEWMAT::ColumnVector &grad_f, int &result_mode), void(∗user_con_eval)(int mode, int n, const NEWMAT::ColumnVector &x, NEWMAT::ColumnVector &g, NEWMAT::Matrix &grad_g, int &result_mode))

  alternate constructor for instantiations "on the fly"

- ∼SNLLOptimizer ()

  destructor

- void find_optimum ()

  Performs the iterations to determine the optimal solution.

Protected Member Functions

- void initialize_run ()

  SNLLBase::snll_initialize_run(), and performs other set-up.

- void post_run (std::ostream &s)

  performs data recovery and calls Optimizer::post_run()

- void finalize_run ()

  performs cleanup, restores instances and calls parent finalize

Static Private Member Functions

- static void nlf0_evaluator (int n, const NEWMAT::ColumnVector &x, NEWMAT::Real &f, int &result_mode)

  require only function values.

- static void nlf1_evaluator (int mode, int n, const NEWMAT::ColumnVector &x, NEWMAT::Real &f, NEWMAT::ColumnVector &grad_f, int &result_mode)

  values and gradients to OPT++ methods.

- static void nlf2_evaluator (int mode, int n, const NEWMAT::ColumnVector &x, NEWMAT::Real &f, NEWMAT::ColumnVector &grad_f, NEWMAT::SymmetricMatrix &hess_f, int &result_mode)

  values, gradients, and Hessians to OPT++ methods.

- static void constraint0_evaluator (int n, const NEWMAT::ColumnVector &x, NEWMAT::ColumnVector &g, int &result_mode)

  only constraint values.

- static void constraint1_evaluator (int mode, int n, const NEWMAT::ColumnVector &x, NEWMAT::ColumnVector &g, NEWMAT::Matrix &grad_g, int &result_mode)

  values and gradients to OPT++ methods.

- static void constraint2_evaluator (int mode, int n, const NEWMAT::ColumnVector &x, NEWMAT::ColumnVector &g, NEWMAT::Matrix &grad_g, OPTPP::OptppArray< NEWMAT::SymmetricMatrix > &hess_g, int &result_mode)

  values, gradients, and Hessians to OPT++ methods.

Private Attributes

- SNLLOptimizer * prevSnllOptInstance

  restoration in the case of iterator/model recursion

- OPTPP::NLP0 * nlfObjective

  objective NLF base class pointer

- OPTPP::NLP0 * nlfConstraint

  constraint NLF base class pointer

- OPTPP::NLP * nlpConstraint

  constraint NLP pointer

- OPTPP::NLF0 * nlf0

  pointer to objective NLF for nongradient optimizers

- OPTPP::NLF1 * nlf1

  pointer to objective NLF for (analytic) gradient-based optimizers

- OPTPP::NLF1 * nlf1Con

  pointer to constraint NLF for (analytic) gradient-based optimizers

- OPTPP::FDNLF1 * fdnlf1

  pointer to objective NLF for (finite diff) gradient-based optimizers

- OPTPP::FDNLF1 * fdnlf1Con

  pointer to constraint NLF for (finite diff) gradient-based optimizers

- OPTPP::NLF2 * nlf2

  pointer to objective NLF for full Newton optimizers

- OPTPP::NLF2 * nlf2Con

  pointer to constraint NLF for full Newton optimizers

- OPTPP::OptimizeClass * theOptimizer

  optimizer base class pointer

- OPTPP::OptPDS * optpds

  PDS optimizer pointer.

- OPTPP::OptCG * optcg

  CG optimizer pointer.

- OPTPP::OptLBFGS * optlbfgs

  L-BFGS optimizer pointer.

- OPTPP::OptNewton * optnewton

  Newton optimizer pointer.

- OPTPP::OptQNewton * optqnewton

  Quasi-Newton optimizer pointer.

- OPTPP::OptFDNewton * optfdnewton

  Finite Difference Newton opt pointer.

- OPTPP::OptBCNewton * optbcnewton

Bound constrained Newton opt pointer.

- OPTPP::OptBCQNewton * optbcqnewton

  Bnd constrained Quasi-Newton opt ptr.

- OPTPP::OptBCFDNewton * optbcfdnewton

  Bnd constrained FD-Newton opt ptr.

- OPTPP::OptNIPS * optnips

  NIPS optimizer pointer.

- OPTPP::OptQNIPS * optqnips

  Quasi-Newton NIPS optimizer pointer.

- OPTPP::OptFDNIPS * optfdnips

  Finite Difference NIPS opt pointer.

- String setUpType

  NonDReliability currently uses the user_functions mode.

- RealVector initialPoint

  holds initial point passed in for "user_functions" mode.

- RealVector lowerBounds

  holds variable lower bounds passed in for "user_functions" mode.

- RealVector upperBounds

  holds variable upper bounds passed in for "user_functions" mode.

Static Private Attributes

- static SNLLOptimizer * snllOptInstance

  functions in order to avoid the need for static data

8.129.1 Detailed Description

Wrapper class for the OPT++ optimization library.

The SNLLOptimizer class provides a wrapper for OPT++, a C++ optimization library of nonlinear programming and pattern search techniques from the Computational Sciences and Mathematics Research (CSMR) department at Sandia's Livermore CA site. It uses a function pointer approach for which passed functions must be either global functions or static member functions. Any attribute used within static member functions must be either local to that function, a static member, or accessed by static pointer.

The user input mappings are as follows: `max_iterations`, `max_function_evaluations`, `convergence_tolerance`, `max_step`, `gradient_tolerance`, `search_method`, and `search_scheme_size` are set using OPT++'s setMaxIter(), setMaxFeval(), setFcnTol(), setMaxStep(), setGradTol(), setSearchStrategy(), and setSSS() member functions, respectively; `output` verbosity is used to toggle OPT++'s debug mode using the setDebug() member function. Internal to OPT++, there are 3 search strategies, while the DAKOTA `search_method` specification supports 4 (`value_based_line_search`, `gradient_based_line_search`, `trust_region`, or `tr_pds`). The difference stems from the "is_expensive" flag in OPT++. If the search strategy is LineSearch and "is_expensive" is turned on, then the `value_based_line_search` is used. Otherwise (the "is_expensive" default is off), the algorithm will use the `gradient_based_line_search`. Refer to [Meza, J.C., 1994] and to the OPT++ source in the Dakota/packages/OPTPP directory for information on OPT++ class member functions.

8.129.2 Constructor & Destructor Documentation

8.129.2.1 SNLLOptimizer (Model & *model*)

standard constructor

This constructor is used for normal instantiations using data from the ProblemDescDB.

8.129.2.2 SNLLOptimizer (const String & *method_name*, Model & *model*)

alternate constructor for instantiations "on the fly"

This is an alternate constructor for instantiations on the fly using a Model but no ProblemDescDB.

8.129.2.3 SNLLOptimizer (const RealVector & *initial_pt*, const RealVector & *var_l_bnds*, const RealVector & *var_u_bnds*, const RealMatrix & *lin_ineq_coeffs*, const RealVector & *lin_ineq_l_bnds*, const RealVector & *lin_ineq_u_bnds*, const RealMatrix & *lin_eq_coeffs*, const RealVector & *lin_eq_tgts*, const RealVector & *nln_ineq_l_bnds*, const RealVector & *nln_ineq_u_bnds*, const RealVector & *nln_eq_tgts*, void(∗)(int mode, int n, const NEWMAT::ColumnVector &x, NEWMAT::Real &f, NEWMAT::ColumnVector &grad_f, int &result_mode) *user_obj_eval*, void(∗)(int mode, int n, const NEWMAT::ColumnVector &x, NEWMAT::ColumnVector &g, NEWMAT::Matrix &grad_g, int &result_mode) *user_con_eval*)

alternate constructor for instantiations "on the fly"

This is an alternate constructor for performing an optimization using the passed in objective function and constraint function pointers.

8.129.3 Member Function Documentation

8.129.3.1 void nlf0_evaluator (int *n*, const NEWMAT::ColumnVector & *x*, NEWMAT::Real & *f*, int & *result_mode*) `[static, private]`

require only function values.

For use when DAKOTA computes f and gradients are not directly available. This is used by nongradient-based optimizers such as PDS and by gradient-based optimizers in vendor numerical gradient mode (opt++'s internal finite difference routine is used).

8.129.3.2 void nlf1_evaluator (int *mode*, int *n*, const NEWMAT::ColumnVector & *x*, NEWMAT::Real & *f*, NEWMAT::ColumnVector & *grad_f*, int & *result_mode*) `[static, private]`

values and gradients to OPT++ methods.

For use when DAKOTA computes f and df/dX (regardless of gradientType). Vendor numerical gradient case is handled by nlf0_evaluator.

8.129.3.3 void nlf2_evaluator (int *mode*, int *n*, const NEWMAT::ColumnVector & *x*, NEWMAT::Real & *f*, NEWMAT::ColumnVector & *grad_f*, NEWMAT::SymmetricMatrix & *hess_f*, int & *result_mode*) `[static, private]`

values, gradients, and Hessians to OPT++ methods.

For use when DAKOTA receives f, df/dX, & d^2f/dx^2 from the ApplicationInterface (analytic only). Finite differencing does not make sense for a full Newton approach, since lack of analytic gradients & Hessian should dictate the use of quasi-newton or fd-newton. Thus, there is no fdnlf2_evaluator for use with full Newton approaches, since it is preferable to use quasi-newton or fd-newton with nlf1. Gauss-Newton does not fit this model; it uses nlf2_evaluator_gn instead of nlf2_evaluator.

8.129.3.4 void constraint0_evaluator (int *n*, const NEWMAT::ColumnVector & *x*, NEWMAT::ColumnVector & *g*, int & *result_mode*) `[static, private]`

only constraint values.

For use when DAKOTA computes g and gradients are not directly available. This is used by nongradient-based optimizers and by gradient-based optimizers in vendor numerical gradient mode (opt++'s internal finite difference routine is used).

8.129.3.5 void constraint1_evaluator (int *mode*, int *n*, const NEWMAT::ColumnVector & *x*, NEWMAT::ColumnVector & *g*, NEWMAT::Matrix & *grad_g*, int & *result_mode*) `[static, private]`

values and gradients to OPT++ methods.

For use when DAKOTA computes g and dg/dX (regardless of gradientType). Vendor numerical gradient case is handled by constraint0_evaluator.

8.129.3.6 void constraint2_evaluator (int *mode*, int *n*, const NEWMAT::ColumnVector & *x*, NEWMAT::ColumnVector & *g*, NEWMAT::Matrix & *grad_g*, OPTPP::OptppArray< NEWMAT::SymmetricMatrix > & *hess_g*, int & *result_mode*) `[static, private]`

values, gradients, and Hessians to OPT++ methods.

For use when DAKOTA computes g, dg/dX, & d^2g/dx^2 (analytic only).

The documentation for this class was generated from the following files:

- SNLLOptimizer.H
- SNLLOptimizer.C

8.130 SOLBase Class Reference

Base class for Stanford SOL software.

Inheritance diagram for SOLBase::



Public Member Functions

- SOLBase ()

  default constructor

- SOLBase (Model &model)

  standard constructor

- ~SOLBase ()

  destructor

Protected Member Functions

- void allocate_arrays (const int &num_cv, const size_t &num_nln_con, const RealMatrix &lin_ineq_coeffs, const RealMatrix &lin_eq_coeffs)

  Allocates miscellaneous arrays for the SOL algorithms.

- void deallocate_arrays ()

  Deallocates memory previously allocated by allocate_arrays().

- void allocate_workspace (const int &num_cv, const int &num_nln_con, const int &num_lin_con, const int &num_lsq)

  Allocates real and integer workspaces for the SOL algorithms.

- void set_options (bool speculative_flag, bool vendor_num_grad_flag, short output_lev, const int &verify_-lev, const Real &fn_prec, const Real &linesrch_tol, const int &max_iter, const Real &constr_tol, const Real &conv_tol, const std::string &grad_type, const Real &fdss)

  Sets SOL method options using calls to npoptn2.

- void augment_bounds (RealVector &augmented_l_bnds, RealVector &augmented_u_bnds, const RealVector &lin_ineq_l_bnds, const RealVector &lin_ineq_u_bnds, const RealVector &lin_eq_targets, const RealVector &nln_ineq_l_bnds, const RealVector &nln_ineq_u_bnds, const RealVector &nln_eq_targets)

  augments variable bounds with linear and nonlinear constraint bounds.

Static Protected Member Functions

- static void constraint_eval (int &mode, int &ncnln, int &n, int &nrowj, int *needc, double *x, double *c, double *cjac, int &nstate)

  derivatives of the nonlinear constraint functions

Protected Attributes

- int realWorkSpaceSize

  size of realWorkSpace

- int intWorkSpaceSize

  size of intWorkSpace

- RealArray realWorkSpace

  real work space for NPSOL/NLSSOL

- IntArray intWorkSpace

  int work space for NPSOL/NLSSOL

- int nlnConstraintArraySize

  used for non-zero array sizing (nonlinear constraints)

- int linConstraintArraySize

  used for non-zero array sizing (linear constraints)

- RealArray cLambda

  CLAMBDA from NPSOL manual: Langrange multipliers.

- IntArray constraintState

  ISTATE from NPSOL manual: constraint status.

- int informResult

  INFORM from NPSOL manual: optimization status on exit.

- int numberIterations

  ITER from NPSOL manual: number of (major) iterations performed.

- int boundsArraySize

  nonlinear constraint bounds)

- double * linConstraintMatrixF77

  [A] matrix from NPSOL manual: linear constraint coefficients

- double * upperFactorHessianF77

the Lagrangian.

- double * constraintJacMatrixF77

  [CJAC] matrix from NPSOL manual: nonlinear constraint Jacobian

- int fnEvalCntr

  counter for testing against maxFunctionEvals

- size_t constrOffset

  and NPSOLOptimizer::numObjectiveFns

Static Protected Attributes

- static SOLBase * solInstance

  functions in order to avoid the need for static data

- static Minimizer * optLSqInstance

  evaluator functions in order to avoid the need for static data

8.130.1 Detailed Description

Base class for Stanford SOL software.

The SOLBase class provides a common base class for NPSOLOptimizer and NLSSOLLeastSq, both of which are Fortran 77 sequential quadratic programming algorithms from Stanford University marketed by Stanford Business Associates.

The documentation for this class was generated from the following files:

- SOLBase.H
- SOLBase.C

8.131 Strategy Class Reference

Base class for the strategy class hierarchy.

Inheritance diagram for Strategy::

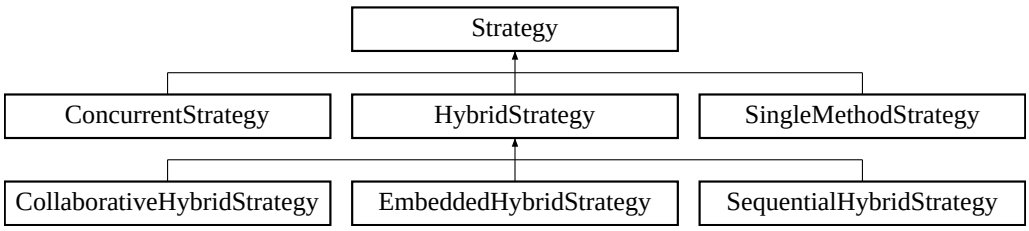

Public Member Functions

- Strategy ()

  default constructor

- Strategy (ProblemDescDB &problem_db)

  envelope constructor

- Strategy (const Strategy &strat)

  copy constructor

- virtual ~Strategy ()

  destructor

- Strategy operator= (const Strategy &strat)

  assignment operator

- virtual void run_strategy ()

  the model(s). Called from main.C.

- virtual const Variables & variables_results () const

  return the final strategy solution (variables)

- virtual const Response & response_results () const

  return the final strategy solution (response)

- ProblemDescDB & problem_description_db () const

  returns the problem description database (probDescDB)

Protected Member Functions

- Strategy (BaseConstructor, ProblemDescDB &problem_db)
  derived class constructors - Coplien, p. 139)
- virtual void initialize_iterator (int index)
  scheduling function (serve_iterators() or static_schedule_iterators())
- virtual void pack_parameters_buffer (MPIPackBuffer &send_buffer, int job_index)
  pack a send_buffer for assigning an iterator job to a server
- virtual void unpack_parameters_buffer (MPIUnpackBuffer &recv_buffer)
  unpack a recv_buffer for accepting an iterator job from the scheduler
- virtual void pack_results_buffer (MPIPackBuffer &send_buffer, int job_index)
  pack a send_buffer for returning iterator results from a server
- virtual void unpack_results_buffer (MPIUnpackBuffer &recv_buffer, int job_index)
  unpack a recv_buffer for accepting iterator results from a server
- virtual void update_local_results (int job_index)
  update local PRP results arrays with current iteration results
- void init_iterator_parallelism ()
  parallel configuration attributes, and managing outputs and restart.
- void init_iterator (Iterator &the_iterator, Model &the_model)
  convenience function for allocating comms prior to running an iterator
- void run_iterator (Iterator &the_iterator, Model &the_model)
  due to use by MINLPNode.
- void free_iterator (Iterator &the_iterator, Model &the_model)
  convenience function for deallocating comms after running an iterator
- void schedule_iterators (Iterator &the_iterator, Model &the_model)
  static_schedule_iterators()
- void self_schedule_iterators (Model &the_model)
  among slave iterator servers (called by derived run_strategy())
- void serve_iterators (Iterator &the_iterator, Model &the_model)
  assigned by the strategy master (called by derived run_strategy())
- void static_schedule_iterators (Iterator &the_iterator, Model &the_model)
  (called by derived run_strategy())

Protected Attributes

- ProblemDescDB & probDescDB

  class member reference to the problem description database

- ParallelLibrary & parallelLib

  class member reference to the parallel library

- String strategyName

  type of strategy: single_method, hybrid, multi_start, or pareto_set.

- bool stratIterMessagePass

  flag for message passing at si level

- bool stratIterDedMaster

  flag for dedicated master part. at si level

- int worldRank

  processor rank in MPI_COMM_WORLD

- int worldSize

  size of MPI_COMM_WORLD

- int iteratorCommRank

  processor rank in iteratorComm

- int iteratorCommSize

  number of processors in iteratorComm

- int numIteratorServers

  number of concurrent iterator partitions

- int iteratorServerId

  identifier for an iterator server

- bool graph2DFlag

  flag for using 2D graphics plots

- bool tabularDataFlag

  flag for file tabulation of graphics data

- String tabularDataFile

  filename for tabulation of graphics data

- int maxConcurrency

  maximum iterator concurrency possible in Strategy

- int numIteratorJobs

  number of iterator executions to schedule

- int paramsMsgLen

  length of MPI buffer for parameter input instance(s)

- int resultsMsgLen

  length of MPI buffer for results output instance(s)

Private Member Functions

- Strategy * get_strategy ()

  Used by the envelope to instantiate the correct letter class.

Private Attributes

- Strategy * strategyRep

  pointer to the letter (initialized only for the envelope)

- int referenceCount

  number of objects sharing strategyRep

8.131.1 Detailed Description

Base class for the strategy class hierarchy.

The Strategy class is the base class for the class hierarchy providing the top level control in DAKOTA. The strategy is responsible for creating and managing iterators and models. For memory efficiency and enhanced polymorphism, the strategy hierarchy employs the "letter/envelope idiom" (see Coplien "Advanced C++", p. 133), for which the base class (Strategy) serves as the envelope and one of the derived classes (selected in Strategy::get_strategy()) serves as the letter.

8.131.2 Constructor & Destructor Documentation

8.131.2.1 Strategy ()

default constructor

Default constructor. strategyRep is NULL in this case (a populated problem_db is needed to build a meaningful Strategy object). This makes it necessary to check for NULL in the copy constructor, assignment operator, and destructor.

8.131.2.2 Strategy (ProblemDescDB & *problem_db*)

envelope constructor

Used in main.C instantiation to build the envelope. This constructor only needs to extract enough data to properly execute get_strategy, since Strategy::Strategy(BaseConstructor, problem_db) builds the actual base class data inherited by the derived strategies.

8.131.2.3 Strategy (const Strategy & *strat*)

copy constructor

Copy constructor manages sharing of strategyRep and incrementing of referenceCount.

8.131.2.4 ~Strategy () [virtual]

destructor

Destructor decrements referenceCount and only deletes strategyRep when referenceCount reaches zero.

8.131.2.5 Strategy (BaseConstructor, ProblemDescDB & *problem_db*) [protected]

derived class constructors - Coplien, p. 139)

This constructor is the one which must build the base class data for all inherited strategies. get_strategy() instantiates a derived class letter and the derived constructor selects this base class constructor in its initialization list (to avoid the recursion of the base class constructor calling get_strategy() again). Since the letter IS the representation, its representation pointer is set to NULL (an uninitialized pointer causes problems in ~Strategy).

8.131.3 Member Function Documentation

8.131.3.1 Strategy operator= (const Strategy & *strat*)

assignment operator

Assignment operator decrements referenceCount for old strategyRep, assigns new strategyRep, and increments referenceCount for new strategyRep.

8.131.3.2 void pack_parameters_buffer (MPIPackBuffer & *send_buffer*, int *job_index*) [protected, virtual]

pack a send_buffer for assigning an iterator job to a server

This virtual function redefinition is executed on the dedicated master processor for self scheduling. It is not used for peer partitions.

Reimplemented in ConcurrentStrategy, and SequentialHybridStrategy.

8.131.3.3 void unpack_parameters_buffer (MPIUnpackBuffer & *recv_buffer*) [protected, virtual]

unpack a recv_buffer for accepting an iterator job from the scheduler

This virtual function redefinition is executed on an iterator server for dedicated master self scheduling. It is not used for peer partitions.

Reimplemented in ConcurrentStrategy, and SequentialHybridStrategy.

8.131.3.4 void pack_results_buffer (MPIPackBuffer & *send_buffer*, int *job_index*) [protected, virtual]

pack a send_buffer for returning iterator results from a server

This virtual function redefinition is executed either on an iterator server for dedicated master self scheduling or on peers 2 through n for static scheduling.

Reimplemented in ConcurrentStrategy, and SequentialHybridStrategy.

8.131.3.5 void unpack_results_buffer (MPIUnpackBuffer & *recv_buffer*, int *job_index*) [protected, virtual]

unpack a recv_buffer for accepting iterator results from a server

This virtual function redefinition is executed on an strategy master (either the dedicated master processor for self scheduling or peer 1 for static scheduling).

Reimplemented in ConcurrentStrategy, and SequentialHybridStrategy.

8.131.3.6 void init_iterator_parallelism () [protected]

parallel configuration attributes, and managing outputs and restart.

This function is called from derived class constructors once maxConcurrency is defined but prior to instantiating Iterators and Models.

8.131.3.7 void init_iterator (Iterator & *the_iterator*, Model & *the_model*) [protected]

convenience function for allocating comms prior to running an iterator

This is a convenience function for encapsulating the allocation of communicators prior to running an iterator. It does not require a strategyRep forward since it is only used by letter objects.

8.131.3.8 void run_iterator (Iterator & *the_iterator*, Model & *the_model*) [protected]

due to use by MINLPNode.

This is a convenience function for encapsulating the parallel features (run/serve) of running an iterator. This function omits allocation/deallocation of communicators to provide greater efficiency in those strategies which involve multiple iterator executions but only require communicator allocation/deallocation to be performed once.

It does not require a strategyRep forward since it is only used by letter objects. While it is currently a public function due to its use in MINLPNode, this usage still involves a strategy letter object.

8.131.3.9 void free_iterator (Iterator & *the_iterator*, Model & *the_model*) [protected]

convenience function for deallocating comms after running an iterator

This is a convenience function for encapsulating the deallocation of communicators after running an iterator. It does not require a strategyRep forward since it is only used by letter objects.

8.131.3.10 void schedule_iterators (Iterator & *the_iterator*, Model & *the_model*) [protected]

static_schedule_iterators()

This implementation supports the scheduling of multiple jobs using a single iterator/model pair. Additional future (overloaded) implementations could involve independent iterator instances.

8.131.3.11 void self_schedule_iterators (Model & *the_model*) [protected]

among slave iterator servers (called by derived run_strategy())

This function is adapted from ApplicationInterface::self_schedule_evaluations().

8.131.3.12 void serve_iterators (Iterator & *the_iterator*, Model & *the_model*) [protected]

assigned by the strategy master (called by derived run_strategy())

This function is similar in structure to ApplicationInterface::serve_evaluations_synch().

8.131.3.13 Strategy * get_strategy () [private]

Used by the envelope to instantiate the correct letter class.

Used only by the envelope constructor to initialize strategyRep to the appropriate derived type, as given by the strategyName attribute.

The documentation for this class was generated from the following files:

- DakotaStrategy.H
- DakotaStrategy.C

8.132 String Class Reference

Dakota::String class, used as main string class for Dakota.

Public Member Functions

- String ()

  Default constructor.

- String (const String &a)

  Copy constructor for incoming String.

- String (const String &a, size_t start_index, size_t num_items)

  Copy constructor for portion of incoming String.

- String (const char ∗c_string)

  Copy constructor for incoming char∗ array.

- String (const std::string &a)

  Copy constructor for incoming base string.

- ∼String ()

  Destructor.

- String & operator= (const String &)

  Assignment operator for incoming String.

- String & operator= (const std::string &)

  Assignment operator for incoming base string.

- String & operator= (const char ∗)

  Assignment operator for incoming char∗ array.

- operator const char ∗ () const

  The operator() returns pointer to standard C char array.

- String & toUpper ()

  Convert to upper case string.

- void upper ()
- String & toLower ()

  Convert to lower case string.

- void lower ()
- bool contains (const char ∗sub_string) const

Returns true if String contains char∗ substring.

- bool begins (const char ∗sub_string) const

  Returns true if String starts with char∗ substring.

- bool ends (const char ∗sub_string) const

  Returns true if String ends with char∗ substring.

- char ∗ data () const

  Returns pointer to standard C char array.

8.132.1 Detailed Description

Dakota::String class, used as main string class for Dakota.

The Dakota::String class is the common string class for Dakota. It provides a common interface for string operations whether using the std::string interface or the (legacy) RogueWave RWCString API

8.132.2 Member Function Documentation

8.132.2.1 operator const char ∗ () const [inline]

The operator() returns pointer to standard C char array.

The operator () returns a pointer to a char string. Uses the STL c_str() method. This allows for the String to be used in method calls without having to call the data() or c_str() methods.

8.132.2.2 void upper ()

Private method which converts String to upper. Utilizes an STL iterator to step through the string and then calls the STL toupper() method. Needs to be done this way because STL only provides a single char toupper method.

8.132.2.3 void lower ()

Private method which converts String to lower. Utilizes an STL iterator to step through the string and then calls the STL tolower() method. Needs to be done this way because STL only provides a single char tolower method.

8.132.2.4 bool contains (const char ∗ *sub_string*) const [inline]

Returns true if String contains char∗ substring.

Returns true if the String contains the char∗ sub_string. Uses the STL find() method.

8.132.2.5 bool begins (const char ∗ *sub_string*) const [inline]

Returns true if String starts with char∗ substring.

Returns true if the String begins with the char∗ sub_string. Uses the STL compare() method.

8.132.2.6 bool ends (const char ∗ *sub_string*) const [inline]

Returns true if String ends with char∗ substring.

Returns true if the String ends with the char∗ sub_string. Uses the STL compare() method.

8.132.2.7 char ∗ data () const [inline]

Returns pointer to standard C char array.

Returns a pointer to C style char array. Needed to mimic the Rogue Wave string class. USE WITH CARE.

The documentation for this class was generated from the following files:

- DakotaString.H
- DakotaString.C

8.133 SurfpackApproximation Class Reference

Interface between Surfpack and Dakota.

Inheritance diagram for SurfpackApproximation::



Public Member Functions

- SurfpackApproximation ()

  default constructor

- SurfpackApproximation (const String &approx_type, const UShortArray &approx_order, size_t num_vars, unsigned short data_order)

  On-the-fly constructor which uses mostly Surfpack model defaults.

- SurfpackApproximation (const ProblemDescDB &problem_db, const size_t &num_acv)

  standard constructor: Surfpack surface of appropriate type will be created

- ~SurfpackApproximation ()

  destructor

Protected Member Functions

- int min_coefficients () const

  build the derived class approximation type in numVars dimensions

- int recommended_coefficients () const

  build the derived class approximation type in numVars dimensions

- void build ()

  and the appropriate Surfpack build method will be invoked

- const Real & get_value (const RealVector &x)

  Return the value of the Surfpack surface for a given parameter vector x.

- const Real & get_prediction_variance (const RealVector &x)

  (KrigingModel only)

- const RealVector & get_gradient (const RealVector &x)

  retrieve the approximate function gradient for a given parameter vector x

- const RealSymMatrix & get_hessian (const RealVector &x)

  retrieve the approximate function Hessian for a given parameter vector x

- const Real & get_diagnostic (const String &metric_type)

  retrieve the diagnostic metric for the diagnostic type specified

- const bool diagnostics_available ()

  check if the diagnostics are available (true for the Surfpack types)

Private Member Functions

- void checkForEqualityConstraints ()

  point, gradient, and/or hessian

- SurfData ∗ surrogates_to_surf_data ()

  copy from SurrogateDataPoint to SurfPoint/SurfData

Private Attributes

- unsigned short approxOrder

  order of polynomial approximation

- SurfpackModel ∗ model

  The native Surfpack approximation.

- SurfpackModelFactory ∗ factory

  factory for the SurfpackModel instance

- SurfData ∗ surfData

  The data used to build the approximation, in Surfpack format.

8.133.1 Detailed Description

Interface between Surfpack and Dakota.

The SurfpackApproximation class is the interface between Dakota and Surfpack. Based on the information in the ProblemDescDB that is passed in through the constructor, SurfpackApproximation builds a Surfpack Surface object that corresponds to one of the following data-fitting techniques: polynomial regression, kriging, artificial neural networks, radial basis function network, or multivariate adaptaive regression splines (MARS).

8.133.2 Member Function Documentation

8.133.2.1 void build () [protected, virtual]

and the appropriate Surfpack build method will be invoked

surfData will be deleted in dtor

Todo

Right now, we're completely deleting the old data and then

recopying the current data into a SurfData object. This was just

the easiest way to arrive at a solution that would build and run.

This function is frequently called from addPoint rebuild, however,

and it's not good to go through this whole process every time one

more data point is added.

Reimplemented from Approximation.

8.133.2.2 const RealSymMatrix & get_hessian (const RealVector & *x*) [protected, virtual]

retrieve the approximate function Hessian for a given parameter vector x

Todo

Make this acceptably efficient

Reimplemented from Approximation.

8.133.2.3 void checkForEqualityConstraints () [private]

point, gradient, and/or hessian

If there is an anchor point, add an equality constraint for its response value. Also add constraints for gradient and hessian, if applicable.

Todo

improve efficiency of conversion

8.133.2.4 SurfData * surrogates_to_surf_data () [private]

copy from SurrogateDataPoint to SurfPoint/SurfData

Copy the data stored in Dakota-style SurrogateDataPoint objects into Surfpack-style SurfPoint and SurfData objects.

The documentation for this class was generated from the following files:

- SurfpackApproximation.H
- SurfpackApproximation.C

8.134 SurrBasedGlobalMinimizer Class Reference

and updates a global surrogate model without trust region controls

Inheritance diagram for SurrBasedGlobalMinimizer::



Public Member Functions

- SurrBasedGlobalMinimizer (Model &model)

  constructor

- ~SurrBasedGlobalMinimizer ()

  destructor

Protected Member Functions

- bool returns_multiple_points () const

  Global surrogate-based methods can return multiple points.

Private Member Functions

- void minimize_surrogates ()

  optimizing on and improving surrogates of the response functions.

Private Attributes

- bool replacePoints

  than continuing to append, during construction of the next surrogate

8.134.1 Detailed Description

and updates a global surrogate model without trust region controls

This method uses a SurrogateModel to perform minimization (optimization or nonlinear least squares) through a set of iterations. At each iteration, a surrogate is built, the surrogate is minimized, and the optimal points from the surrogate are then evaluated with the "true" function, to generate new points upon which the surrogate for the next iteration is built.

The documentation for this class was generated from the following files:

- SurrBasedGlobalMinimizer.H
- SurrBasedGlobalMinimizer.C

8.135 SurrBasedLocalMinimizer Class Reference

and nonlinear least squares.

Inheritance diagram for SurrBasedLocalMinimizer::



Public Member Functions

- SurrBasedLocalMinimizer (Model &model)

  constructor

- ~SurrBasedLocalMinimizer ()

  destructor

Protected Member Functions

- void reset ()

  reset convergence controls in case of multiple SBLM executions

Private Member Functions

- void minimize_surrogates ()

  global, or hierarchical surrogates over a series of trust regions.

- bool tr_bounds (const RealVector &global_lower_bnds, const RealVector &global_upper_bnds, RealVector &tr_lower_bnds, RealVector &tr_upper_bnds)

  compute current trust region bounds

- void find_center_truth (const Iterator &dace_iterator, Model &truth_model)

  retrieve responseCenterTruth if possible, evaluate it if not

- void find_center_approx ()

retrieve responseCenter_approx if possible, evaluate it if not

- void hard_convergence_check (const Response &response_truth, const RealVector &c_vars, const RealVector &lower_bnds, const RealVector &upper_bnds)

  merit function near zero)

- void tr_ratio_check (const RealVector &c_vars_star, const RealVector &tr_lower_bounds, const RealVector &tr_upper_bounds)

  region resizing) and check for soft convergence (diminishing returns)

- void update_penalty (const RealVector &fns_center_truth, const RealVector &fns_star_truth)

  initialize and update the penaltyParameter

- void relax_constraints (const RealVector &lower_bnds, const RealVector &upper_bnds)

  relax constraints by updating bounds when current iterate is infeasible

Static Private Member Functions

- static void approx_subprob_objective_eval (const Variables &surrogate_vars, const Variables &recast_vars, const Response &surrogate_response, Response &recast_response)

  static function used to define the approximate subproblem objective.

- static void approx_subprob_constraint_eval (const Variables &surrogate_vars, const Variables &recast_vars, const Response &surrogate_response, Response &recast_response)

  static function used to define the approximate subproblem constraints.

- static void hom_objective_eval (int &mode, int &n, double *tau_and_x, double &f, double *grad_f, int &)

  homotopy constraint relaxation formulation.

- static void hom_constraint_eval (int &mode, int &ncnln, int &n, int &nrowj, int *needc, double *tau_and_x, double *c, double *cjac, int &nstate)

  homotopy constraint relaxation formulation.

Private Attributes

- Real origTrustRegionFactor

  original user specification for trustRegionFactor

- Real trustRegionFactor

  bound - lower bound for each design variable).

- Real minTrustRegionFactor

  factor is reduced below the value of minTrustRegionFactor

- Real trRatioContractValue

  trust region ratio min value: contract tr if ratio below this value

- Real trRatioExpandValue

  trust region ratio sufficient value: expand tr if ratio above this value

- Real gammaContract

  trust region contraction factor

- Real gammaExpand

  trust region expansion factor

- short approxSubProbObj

  or AUGMENTED_LAGRANGIAN_OBJ

- short approxSubProbCon

  ORIGINAL_CON.

- Model approxSubProbModel

  involve a RecastModel recursion applied to iteratedModel

- bool recastSubProb

  flag to indicate when approxSubProbModel involves a RecastModel recursion

- short trConstraintRelax

  points: NO_RELAX or HOMOTOPY

- short meritFnType

  ADAPTIVE_PENALTY_MERIT, LAGRANGIAN_MERIT, or AUGMENTED_LAGRANGIAN_MERIT.

- short acceptLogic

  type of iterate acceptance test logic: FILTER or TR_RATIO

- int penaltyIterOffset

  for adaptive_penalty merit functions

- short convergenceFlag

  code indicating satisfaction of hard or soft convergence conditions

- short softConvCount

  count reaches softConvLimit, stop SBLM.

- short softConvLimit

  exceeded by softConvCount, stop SBLM.

- bool truthGradientFlag

  flags the use/availability of truth gradients within the SBLM process

- bool approxGradientFlag

  flags the use/availability of surrogate gradients within the SBLM process

- bool truthHessianFlag

  flags the use/availability of truth Hessians within the SBLM process

- bool approxHessianFlag

  flags the use/availability of surrogate Hessians within the SBLM process

- bool correctionFlag

  of each trust region

- bool globalApproxFlag

  flags the use of a global data fit surrogate (rsm, ann, mars, kriging)

- bool multiptApproxFlag

  flags the use of a multipoint data fit surrogate (TANA)

- bool localApproxFlag

  flags the use of a local data fit surrogate (Taylor series)

- bool hierarchApproxFlag

  flags the use of a model hierarchy/multifidelity surrogate

- bool newCenterFlag

  a new trust region center

- bool daceCenterPtFlag

  evaluations for global approximations (CCD, Box-Behnken)

- bool multiLayerBypassFlag

  (responseCenterTruth and responseStarTruth).

- bool useDerivsFlag

  are to be evaluated at each DACE point in global surrogate builds.

- RealVector nonlinIneqLowerBndsSlack

  individual violations of nonlinear inequality constraint lower bounds

- RealVector nonlinIneqUpperBndsSlack

  individual violations of nonlinear inequality constraint upper bounds

- RealVector nonlinEqTargetsSlack

individual violations of nonlinear equality constraint targets

- Real tau

  constraint relaxation parameter

- Real alpha

  constraint relaxation parameter backoff parameter (multiplier)

- Variables varsCenter

  variables at the trust region center

- Response responseCenterApprox

  approx response at trust region center

- Response responseStarApprox

  approx response at SBLM cycle minimum

- Response responseCenterTruth

  truth response at trust region center

- Response responseStarTruth

  truth response at SBLM cycle minimum

Static Private Attributes

- static SurrBasedLocalMinimizer * sblmInstance

  pointer to SBLM instance used in static member functions

8.135.1 Detailed Description

and nonlinear least squares.

This minimizer uses a SurrogateModel to perform minimization based on local, global, or hierarchical surrogates. It achieves provable convergence through the use of a sequence of trust regions and the application of surrogate corrections at the trust region centers.

8.135.2 Member Function Documentation

8.135.2.1 void minimize_surrogates () `[private, virtual]`

global, or hierarchical surrogates over a series of trust regions.

Trust region-based strategy to perform surrogate-based optimization in subregions (trust regions) of the parameter space. The minimizer operates on approximations in lieu of the more expensive simulation-based response functions. The size of the trust region is varied according to the goodness of the agreement between the approximations and the true response functions.

Implements SurrBasedMinimizer.

8.135.2.2 void hard_convergence_check (const Response & *response_truth*, const RealVector & *c_vars*, const RealVector & *lower_bnds*, const RealVector & *upper_bnds*) [private]

merit function near zero)

The hard convergence check computes the gradient of the merit function at the trust region center, performs a projection for active bound constraints (removing any gradient component directed into an active bound), and signals convergence if the 2-norm of this projected gradient is less than convergenceTol.

8.135.2.3 void tr_ratio_check (const RealVector & *c_vars_star*, const RealVector & *tr_lower_bnds*, const RealVector & *tr_upper_bnds*) [private]

region resizing) and check for soft convergence (diminishing returns)

Assess acceptance of SBLM iterate (trust region ratio or filter) and compute soft convergence metrics (number of consecutive failures, min trust region size, etc.) to assess whether the convergence rate has decreased to a point where the process should be terminated (diminishing returns).

8.135.2.4 void update_penalty (const RealVector & *fns_center_truth*, const RealVector & *fns_star_truth*) [private]

initialize and update the penaltyParameter

Scaling of the penalty value is important to avoid rejecting SBLM iterates which must increase the objective to achieve a reduction in constraint violation. In the basic penalty case, the penalty is ramped exponentially based on the iteration counter. In the adaptive case, the ratio of relative change between center and star points for the objective and constraint violation values is used to rescale penalty values.

8.135.2.5 void approx_subprob_objective_eval (const Variables & *surrogate_vars*, const Variables & *recast_vars*, const Response & *surrogate_response*, Response & *recast_response*) [static, private]

static function used to define the approximate subproblem objective.

Objective functions evaluator for solution of approximate subproblem using a RecastModel.

8.135.2.6 void approx_subprob_constraint_eval (const Variables & *surrogate_vars*, const Variables & *recast_vars*, const Response & *surrogate_response*, Response & *recast_response*) [static, private]

static function used to define the approximate subproblem constraints.

Constraint functions evaluator for solution of approximate subproblem using a RecastModel.

8.135.2.7 void hom_objective_eval (int & *mode*, int & *n*, double * *tau_and_x*, double & *f*, double * *grad_f*, int &) [static, private]

homotopy constraint relaxation formulation.

NPSOL objective functions evaluator for solution of homotopy constraint relaxation parameter optimization. This constrained optimization problem performs the update of the tau parameter in the homotopy heuristic approach used to relax the constraints in the original problem .

8.135.2.8 void hom_constraint_eval (int & *mode*, int & *ncnln*, int & *n*, int & *nrowj*, int * *needc*, double * *tau_and_x*, double * *c*, double * *cjac*, int & *nstate*) [static, private]

homotopy constraint relaxation formulation.

NPSOL constraint functions evaluator for solution of homotopy constraint relaxation parameter optimization. This constrained optimization problem performs the update of the tau parameter in the homotopy heuristic approach used to relax the constraints in the original problem.

The documentation for this class was generated from the following files:

- SurrBasedLocalMinimizer.H
- SurrBasedLocalMinimizer.C

8.136 SurrBasedMinimizer Class Reference

Base class for local/global surrogate-based optimization/least squares.

Inheritance diagram for SurrBasedMinimizer::

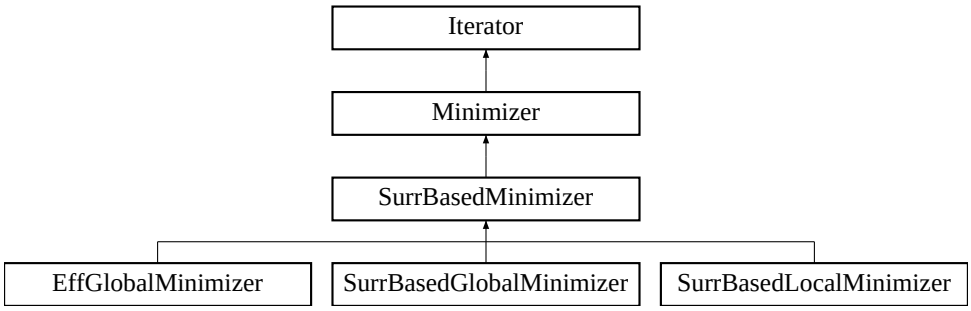

Protected Member Functions

- SurrBasedMinimizer (Model &model)

  constructor

- ~SurrBasedMinimizer ()

  destructor

- void initialize_graphics (bool graph_2d, bool tabular_data, const String &tabular_file)

  initialize graphics customized for surrogate-based iteration

- void run ()

  and may include pre/post steps in lieu of separate pre/post

- void print_results (std::ostream &s)
- virtual void minimize_surrogates ()=0

  approach. Redefines the Iterator::run() virtual function.

- void update_lagrange_multipliers (const RealVector &fn_vals, const RealMatrix &fn_grads)

  initialize and update Lagrange multipliers for basic Lagrangian

- void update_augmented_lagrange_multipliers (const RealVector &fn_vals)

  initialize and update the Lagrange multipliers for augmented Lagrangian

- bool update_filter (const RealVector &fn_vals)

  update a filter from a set of function values

- Real lagrangian_merit (const RealVector &fn_vals, const RealVector &nln_ineq_l_bnds, const RealVector &nln_ineq_u_bnds, const RealVector &nln_eq_tgts)

compute a Lagrangian function from a set of function values

- void lagrangian_gradient (const RealVector &fn_vals, const RealMatrix &fn_grads, const RealVector &nln_ineq_l_bnds, const RealVector &nln_ineq_u_bnds, const RealVector &nln_eq_tgts, RealVector &lag_grad)

  compute the gradient of the Lagrangian function

- Real augmented_lagrangian_merit (const RealVector &fn_vals, const RealVector &nln_ineq_l_bnds, const RealVector &nln_ineq_u_bnds, const RealVector &nln_eq_tgts)

  compute an augmented Lagrangian function from a set of function values

- void augmented_lagrangian_gradient (const RealVector &fn_vals, const RealMatrix &fn_grads, const RealVector &nln_ineq_l_bnds, const RealVector &nln_ineq_u_bnds, const RealVector &nln_eq_tgts, RealVector &alag_grad)

  compute the gradient of the augmented Lagrangian function

- Real penalty_merit (const RealVector &fn_vals)

  compute a penalty function from a set of function values

- void penalty_gradient (const RealVector &fn_vals, const RealMatrix &fn_grads, RealVector &pen_grad)

  compute the gradient of the penalty function

- Real objective (const RealVector &fn_vals)

  compute a composite objective value from one or more objective functions

- void objective_gradient (const RealVector &fn_vals, const RealMatrix &fn_grads, RealVector &obj_grad)

  compute the gradient of the composite objective function

- Real constraint_violation (const RealVector &fn_vals, const Real &constraint_tol)

  compute the constraint violation from a set of function values

Protected Attributes

- Iterator approxSubProbMinimizer

  approximate subproblem on each surrogate-based iteration

- int sbIterNum

  surrogate-based minimization iteration number

- bool optimizationFlag

  flag for use where optimization and NLS must be distinguished

- RealVectorArray sbFilter

  constraint violation) for iterate selection/rejection

- RealVector lagrangeMult

  Lagrange multipliers for basic Lagrangian calculations.

- RealVector augLagrangeMult

  Lagrange multipliers for augmented Lagrangian calculations.

- Real penaltyParameter

  penalty calculations; increased in update_penalty()

- RealVector origNonlinIneqLowerBnds

  original nonlinear inequality constraint lower bounds (no relaxation)

- RealVector origNonlinIneqUpperBnds

  original nonlinear inequality constraint upper bounds (no relaxation)

- RealVector origNonlinEqTargets

  original nonlinear equality constraint targets (no relaxation)

- Real eta

  constant used in etaSequence updates

- Real alphaEta

  power for etaSequence updates when updating penalty

- Real betaEta

  power for etaSequence updates when updating multipliers

- Real etaSequence

  Lagrangian updates (refer to Conn, Gould, and Toint, section 14.4).

8.136.1 Detailed Description

Base class for local/global surrogate-based optimization/least squares.

These minimizers use a SurrogateModel to perform optimization based either on local trust region methods or global updating methods.

8.136.2 Member Function Documentation

8.136.2.1 void run () `[inline, protected, virtual]`

and may include pre/post steps in lieu of separate pre/post

Virtual run function for the iterator class hierarchy. All derived classes need to redefine it.

Reimplemented from Iterator.

8.136.2.2 void print_results (std::ostream & *s*) [protected, virtual]

Redefines default iterator results printing to include optimization results (objective functions and constraints).

Reimplemented from Iterator.

8.136.2.3 void update_lagrange_multipliers (const RealVector & *fn_vals*, const RealMatrix & *fn_grads*) [protected]

initialize and update Lagrange multipliers for basic Lagrangian

For the Rockafellar augmented Lagrangian, simple Lagrange multiplier updates are available which do not require the active constraint gradients. For the basic Lagrangian, Lagrange multipliers are estimated through solution of a nonnegative linear least squares problem.

8.136.2.4 void update_augmented_lagrange_multipliers (const RealVector & *fn_vals*) [protected]

initialize and update the Lagrange multipliers for augmented Lagrangian

For the Rockafellar augmented Lagrangian, simple Lagrange multiplier updates are available which do not require the active constraint gradients. For the basic Lagrangian, Lagrange multipliers are estimated through solution of a nonnegative linear least squares problem.

8.136.2.5 bool update_filter (const RealVector & *fn_vals*) [protected]

update a filter from a set of function values

Update the sbFilter with fn_vals if new iterate is non-dominated.

8.136.2.6 Real lagrangian_merit (const RealVector & *fn_vals*, const RealVector & *nln_ineq_l_bnds*, const RealVector & *nln_ineq_u_bnds*, const RealVector & *nln_eq_tgts*) [protected]

compute a Lagrangian function from a set of function values

The Lagrangian function computation sums the objective function and the Lagrange multipler terms for inequality/equality constraints. This implementation follows the convention in Vanderplaats with g<=0 and h=0. The bounds/targets passed in may reflect the original constraints or the relaxed constraints.

8.136.2.7 Real augmented_lagrangian_merit (const RealVector & *fn_vals*, const RealVector & *nln_ineq_l_bnds*, const RealVector & *nln_ineq_u_bnds*, const RealVector & *nln_eq_tgts*) [protected]

compute an augmented Lagrangian function from a set of function values

The Rockafellar augmented Lagrangian function sums the objective function, Lagrange multipler terms for inequality/equality constraints, and quadratic penalty terms for inequality/equality constraints. This implementation follows the convention in Vanderplaats with g<=0 and h=0. The bounds/targets passed in may reflect the original constraints or the relaxed constraints.

8.136.2.8 Real penalty_merit (const RealVector & *fn_vals*) [protected]

compute a penalty function from a set of function values

The penalty function computation applies a quadratic penalty to any constraint violations and adds this to the objective function(s) p = f + r_p cv.

8.136.2.9 Real objective (const RealVector & *fn_vals*) [protected]

compute a composite objective value from one or more objective functions

The composite objective computation sums up the contributions from one of more objective functions using the multiobjective weights.

8.136.2.10 void objective_gradient (const RealVector & *fn_vals*, const RealMatrix & *fn_grads*, RealVector & *obj_grad*) [protected]

compute the gradient of the composite objective function

The composite objective gradient computation sums up the contributions from one of more objective function gradients using the multiobjective weights.

8.136.2.11 Real constraint_violation (const RealVector & *fn_vals*, const Real & *constraint_tol*) [protected]

compute the constraint violation from a set of function values

Compute the quadratic constraint violation defined as cv = g+^T g+ + h+^T h+. This implementation supports equality constraints and 2-sided inequalities. The constraint_tol allows for a small constraint infeasibility (used for penalty methods, but not Lagrangian methods).

The documentation for this class was generated from the following files:

- SurrBasedMinimizer.H
- SurrBasedMinimizer.C

8.137 SurrogateModel Class Reference

Base class for surrogate models (DataFitSurrModel and HierarchSurrModel).

Inheritance diagram for SurrogateModel::

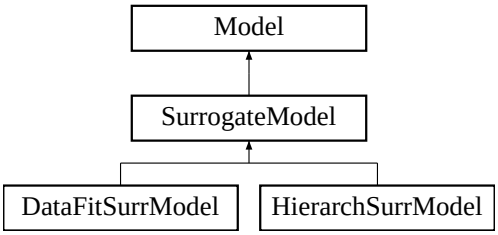

Protected Member Functions

- SurrogateModel (ProblemDescDB &problem_db)

  constructor

- SurrogateModel (ParallelLibrary &parallel_lib, const SharedVariablesData &svd, const ActiveSet &set, const String &corr_type, short corr_order)

  alternate constructor

- ~SurrogateModel ()

  destructor

- Model & subordinate_model ()

  return truth_model()

- void compute_correction (const Response &truth_response, const Response &approx_response, const RealVector &c_vars)

  agreement with truth_response

- void apply_correction (Response &approx_response, const RealVector &c_vars, bool quiet_flag=false)

  apply the correction computed in compute_correction() to approx_response

- void auto_correction (bool correction_flag)

  sets autoCorrection to on (true) or off (false)

- bool auto_correction ()

  returns autoCorrection setting

- void check_submodel_compatibility (const Model &sub_model)

  HierarchSurrModel::highFidelityModel).

- bool force_rebuild ()

forced based on changes in the inactive data

- void asv_mapping (const ShortArray &orig_asv, ShortArray &actual_asv, ShortArray &approx_asv, bool build_flag)

  distributes the incoming orig_asv among actual_asv and approx_asv

- void asv_mapping (const ShortArray &actual_asv, const ShortArray &approx_asv, ShortArray &combined_asv)

  reconstitutes a combined_asv from actual_asv and approx_asv

- void response_mapping (const Response &actual_response, const Response &approx_response, Response &combined_response)

  overlays actual_response and approx_response to update combined_response

Protected Attributes

- bool mixedResponseSet

  flag for mixed approximate/actual responses

- IntSet surrogateFnIndices

  subset that is approximated

- IntResponseMap surrResponseMap

  derived_synchronize_nowait() functions

- IntRealVectorMap rawCVarsMap

  not contain lower level variables sets from finite differencing.

- IntIntMap truthIdMap

  DataFitSurrModel/HierarchSurrModel ids.

- IntIntMap surrIdMap

  DataFitSurrModel/HierarchSurrModel ids.

- IntResponseMap cachedApproxRespMap

  portions were still pending.

- String correctionType

  approximation correction approach to be used: additive or multiplicative

- short correctionOrder

  approximation correction order to be used: 0, 1, or 2

- bool autoCorrection

  and HierarchSurrModel approximate response computations

- bool correctionComputed

  and is available for application

- size_t approxBuilds

  number of calls to build_approximation()

- bool surrogateBypass

  on the underlying truth model.

- RealVector referenceCLBnds

  approximation is built; used to detect when a rebuild is required.

- RealVector referenceCUBnds

  approximation is built; used to detect when a rebuild is required.

- IntVector referenceDILBnds

  approximation is built; used to detect when a rebuild is required.

- IntVector referenceDIUBnds

  approximation is built; used to detect when a rebuild is required.

- RealVector referenceDRLBnds

  approximation is built; used to detect when a rebuild is required.

- RealVector referenceDRUBnds

  approximation is built; used to detect when a rebuild is required.

- RealVector referenceICVars

  rebuild is required.

- IntVector referenceIDIVars

  a rebuild is required.

- RealVector referenceIDRVars

  a rebuild is required.

Private Member Functions

- void apply_additive_correction (RealVector &alpha_corrected_fns, RealMatrix &alpha_corrected_grads, RealSymMatrixArray &alpha_corrected_hessians, const RealVector &c_vars, const ActiveSet &set)

  internal convenience function for applying additive corrections

- void apply_multiplicative_correction (RealVector &beta_corrected_fns, RealMatrix &beta_corrected_grads, RealSymMatrixArray &beta_corrected_hessians, const RealVector &c_vars, const ActiveSet &set)

  internal convenience function for applying multiplicative corrections

Private Attributes

- bool badScalingFlag

  corrections; triggers an automatic switch to additive corrections

- bool combinedFlag

  flag indicating the combination of additive/multiplicative corrections

- bool computeAdditive

  flag indicating the need for additive correction calculations

- bool computeMultiplicative

  flag indicating the need for multiplicative correction calculations

- RealVector addCorrFns

  high and low fidelity model values at x=x_center.

- RealMatrix addCorrGrads

  high/low function difference at x=x_center.

- RealSymMatrixArray addCorrHessians

  high/low function difference at x=x_center.

- RealVector multCorrFns

  high fidelity to low fidelity model values at x=x_center.

- RealMatrix multCorrGrads

  of the high/low function ratio at x=x_center.

- RealSymMatrixArray multCorrHessians

  of the high/low function ratio at x=x_center.

- RealVector combineFactors

  correction instead of a strictly local correction.

- RealVector correctionCenterPt

  (x - x_c) terms in 1st-/2nd-order corrections.

- RealVector correctionPrevCenterPt

  copy of correctionCenterPt from the previous correction cycle

- RealVector approxFnsCenter

  unavailable when applying 1st-/2nd-order multiplicative corrections.

- RealVector approxFnsPrevCenter

  copy of approxFnsCenter from the previous correction cycle

- RealMatrix approxGradsCenter

  unavailable when applying 1st-/2nd-order multiplicative corrections.

- RealVector truthFnsCenter

  Truth function values at the current correction point.

- RealVector truthFnsPrevCenter

  copy of truthFnsCenter from the previous correction cycle

- Variables subModelVars

  among differing variable views in force_rebuild()

- Constraints subModelCons

  among differing variable views in force_rebuild()

8.137.1 Detailed Description

Base class for surrogate models (DataFitSurrModel and HierarchSurrModel).

The SurrogateModel class provides common functions to derived classes for computing and applying corrections to approximations.

8.137.2 Member Function Documentation

8.137.2.1 void compute_correction (const Response & *truth_response*, const Response & *approx_response*, const RealVector & *c_vars*) `[protected, virtual]`

agreement with truth_response

Compute an additive or multiplicative correction that corrects the approx_response to have 0th-order consistency (matches values), 1st-order consistency (matches values and gradients), or 2nd-order consistency (matches values, gradients, and Hessians) with the truth_response at a single point (e.g., the center of a trust region). The 0th-order, 1st-order, and 2nd-order corrections use scalar values, linear scaling functions, and quadratic scaling functions, respectively, for each response function.

Reimplemented from Model.

8.137.2.2 bool force_rebuild () [protected, virtual]

forced based on changes in the inactive data

This function forces a rebuild of the approximation according to the sub-model variables view, the approximation type, and whether the active approximation bounds or inactive variable values have changed since the last approximation build.

Reimplemented from Model.

8.137.3 Member Data Documentation

8.137.3.1 bool autoCorrection [protected]

and HierarchSurrModel approximate response computations

SurrBasedOptStrategy must toggle this value since compute_correction() no longer automatically backs out an old correction.

8.137.3.2 size_t approxBuilds [protected]

number of calls to build_approximation()

used as a flag to automatically build the approximation if one of the derived compute_response functions is called prior to build_approximation().

The documentation for this class was generated from the following files:

- SurrogateModel.H
- SurrogateModel.C

8.138 SysCallAnalysisCode Class Reference

simulations using system calls.

Inheritance diagram for SysCallAnalysisCode::



Public Member Functions

- SysCallAnalysisCode (const ProblemDescDB &problem_db)

  constructor

- ~SysCallAnalysisCode ()

  destructor

- void spawn_evaluation (const bool block_flag)

  spawn a complete function evaluation

- void spawn_input_filter (const bool block_flag)

  spawn the input filter portion of a function evaluation

- void spawn_analysis (const int &analysis_id, const bool block_flag)

  spawn a single analysis as part of a function evaluation

- void spawn_output_filter (const bool block_flag)

  spawn the output filter portion of a function evaluation

8.138.1 Detailed Description

simulations using system calls.

SysCallAnalysisCode creates separate simulation processes using the C system() command. It utilizes CommandShell to manage shell syntax and asynchronous invocations.

8.138.2 Member Function Documentation

8.138.2.1 void spawn_evaluation (const bool *block_flag*)

spawn a complete function evaluation

Put the SysCallAnalysisCode to the shell. This function is used when all portions of the function evaluation (i.e., all analysis drivers) are executed on the local processor.

8.138.2.2 void spawn_input_filter (const bool *block_flag*)

spawn the input filter portion of a function evaluation

Put the input filter to the shell. This function is used when multiple analysis drivers are spread between processors. No need to check for a Null input filter, as this is checked externally. Use of nonblocking shells is supported in this fn, although its use is currently prevented externally.

8.138.2.3 void spawn_analysis (const int & *analysis_id*, const bool *block_flag*)

spawn a single analysis as part of a function evaluation

Put a single analysis to the shell. This function is used when multiple analysis drivers are spread between processors. Use of nonblocking shells is supported in this fn, although its use is currently prevented externally.

8.138.2.4 void spawn_output_filter (const bool *block_flag*)

spawn the output filter portion of a function evaluation

Put the output filter to the shell. This function is used when multiple analysis drivers are spread between processors. No need to check for a Null output filter, as this is checked externally. Use of nonblocking shells is supported in this fn, although its use is currently prevented externally.

The documentation for this class was generated from the following files:

- SysCallAnalysisCode.H
- SysCallAnalysisCode.C

8.139 SysCallApplicInterface Class Reference

using system calls.

Inheritance diagram for SysCallApplicInterface::



Public Member Functions

- SysCallApplicInterface (const ProblemDescDB &problem_db)

  constructor

- ~SysCallApplicInterface ()

  destructor

- void derived_map (const Variables &vars, const ActiveSet &set, Response &response, int fn_eval_id)

  that is specific to a derived class.

- void derived_map_asynch (const ParamResponsePair &pair)

  asynchronous evaluation that is specific to a derived class.

- void derived_synch (PRPQueue &prp_queue)
- void derived_synch_nowait (PRPQueue &prp_queue)
- int derived_synchronous_local_analysis (const int &analysis_id)
- const std::vector< String > & analysis_drivers () const

  retrieve the analysis drivers specification for application interfaces

- const AnalysisCode * analysis_code () const

  return AnalysisCode::fileNameMap when defined for derived Interface class

Private Member Functions

- void spawn_application (const bool block_flag)

  and output filter. Called from derived_map() & derived_map_asynch().

- void derived_synch_kernel (PRPQueue &prp_queue)

  derived_synch_nowait()

- bool system_call_file_test (const std::string &root_file)

  the necessary results file(s)

Private Attributes

- SysCallAnalysisCode sysCallSimulator

  to a CommandShell in various combinations

- IntSet sysCallSet

  system call evaluations

- IntShortMap failCountMap

  map linking function evaluation id's to number of response read failures

8.139.1 Detailed Description

using system calls.

SysCallApplicInterface uses a SysCallAnalysisCode object for performing simulation invocations.

8.139.2 Member Function Documentation

8.139.2.1 void derived_synch (PRPQueue & *prp_queue*) `[inline, virtual]`

Check for completion of active asynch jobs (tracked with sysCallSet). Wait for at least one completion and complete all jobs that have returned. This satisifies a "fairness" principle, in the sense that a completed job will _always_ be processed (whereas accepting only a single completion could always accept the same completion - the case of very inexpensive fn. evals. - and starve some servers).

Reimplemented from ApplicationInterface.

8.139.2.2 void derived_synch_nowait (PRPQueue & *prp_queue*) `[inline, virtual]`

Check for completion of active asynch jobs (tracked with sysCallSet). Make one pass through sysCallSet & complete all jobs that have returned.

Reimplemented from ApplicationInterface.

8.139.2.3 int derived_synchronous_local_analysis (const int & *analysis_id*) `[inline, virtual]`

This code provides the derived function used by ApplicationInterface::serve_analyses_synch().

Reimplemented from ApplicationInterface.

The documentation for this class was generated from the following files:

- SysCallApplicInterface.H
- SysCallApplicInterface.C

8.140 TANA3Approximation Class Reference

approximation (a multipoint approximation).

Inheritance diagram for TANA3Approximation::



Public Member Functions

- TANA3Approximation ()

  default constructor

- TANA3Approximation (ProblemDescDB &problem_db, size_t num_vars)

  standard constructor

- TANA3Approximation (size_t num_vars, unsigned short data_order)

  alternate constructor

- ~TANA3Approximation ()

  destructor

Protected Member Functions

- int min_coefficients () const

  build the derived class approximation type in numVars dimensions

- int num_constraints () const

  return the number of constraints to be enforced via anchorPoint

- void build ()

  builds the approximation from scratch

- const Real & get_value (const RealVector &x)

  retrieve the approximate function value for a given parameter vector

- const RealVector & get_gradient (const RealVector &x)

  retrieve the approximate function gradient for a given parameter vector

- void clear_current ()

Private Member Functions

- void find_scaled_coefficients ()

  compute TANA coefficients based on scaled inputs

- void offset (const RealVector &x, RealVector &s)

  based on minX, apply offset scaling to x to define s

Private Attributes

- RealVector pExp

  vector of exponent values

- RealVector minX

  vector of minimum parameter values used in scaling

- RealVector scX1

  vector of scaled x1 values

- RealVector scX2

  vector of scaled x2 values

- Real H

  the scalar Hessian value in the TANA-3 approximation

8.140.1 Detailed Description

approximation (a multipoint approximation).

The TANA3Approximation class provides a multipoint approximation based on matching value and gradient data from two points (typically the current and previous iterates) in parameter space. It forms an exponential approximation in terms of intervening variables.

8.140.2 Member Function Documentation

8.140.2.1 void clear_current () `[inline, protected, virtual]`

Redefine default implementation to support history mechanism.

Reimplemented from Approximation.

The documentation for this class was generated from the following files:

- TANA3Approximation.H
- TANA3Approximation.C

8.141 TaylorApproximation Class Reference

series (a local approximation).

Inheritance diagram for TaylorApproximation::



Public Member Functions

- TaylorApproximation ()

  default constructor

- TaylorApproximation (ProblemDescDB &problem_db, size_t num_vars)

  standard constructor

- TaylorApproximation (size_t num_vars, unsigned short data_order)

  alternate constructor

- ~TaylorApproximation ()

  destructor

Protected Member Functions

- int min_coefficients () const

  build the derived class approximation type in numVars dimensions

- void build ()

  builds the approximation from scratch

- const Real & get_value (const RealVector &x)

  retrieve the approximate function value for a given parameter vector

- const RealVector & get_gradient (const RealVector &x)

  retrieve the approximate function gradient for a given parameter vector

- const RealSymMatrix & get_hessian (const RealVector &x)

  retrieve the approximate function Hessian for a given parameter vector

8.141.1 Detailed Description

series (a local approximation).

The TaylorApproximation class provides a local approximation based on data from a single point in parameter space. It uses a first- or second-order Taylor series expansion: f(x) = f(x_c) + grad(x_c)' (x - x_c) + (x - x_c)' Hess(x_c) (x - x_c) / 2.

The documentation for this class was generated from the following files:

- TaylorApproximation.H
- TaylorApproximation.C

8.142 TrackerHTTP Class Reference

curl library

Public Member Functions

- TrackerHTTP ()
  and outputs on all ranks
- TrackerHTTP (ProblemDescDB &problem_db, int world_rank=0)
  standard constructor with ProblemDescDB, rank
- ~TrackerHTTP ()
  destructor to free handles
- void post_start ()
  post the start of an analysis and archive start time
- void post_finish (unsigned runtime=0)
  post the completion of an analysis including elapsed time

Private Member Functions

- void initialize (int world_rank=0)
  shared initialization functions across constructors
- void url_add_field (std::string &url, const char *keyword, const std::string &value, bool delimit=true) const
  set delimit = false to omit the &
- void build_default_data (std::string &url, std::time_t &rawtime, const std::string &mode) const
  construct URL with shared information for start/finish
- void send_data_using_get (const std::string &urltopost) const
  whole url including location&fields
- void send_data_using_post (const std::string &datatopost) const
  separate location and query; datatopost="name=daniel&project=curl"
- void populate_method_list (ProblemDescDB &problem_db)
  extract list of methods from problem database
- std::string get_uid () const
  get the real user ID

- std::string get_username () const

  get the username as reported by the environment

- std::string get_hostname () const

  get the system hostname

- std::string get_os () const

  get the operating system

- std::string get_datetime (const std::time_t &rawtime) const

  get the date and time as a string YYYYMMDDHHMMSS

Private Attributes

- CURL * curlPtr

  pointer to the curl handler instance

- FILE * devNull

  pointer to /dev/null

- std::string trackerLocation

  base URL for the tracker

- std::string proxyLocation

  (unlike default CURL behavior)

- long timeoutSeconds

  seconds until the request will timeout (may have issues with signals)

- std::string methodList

  list of active methods

- std::string dakotaVersion

  DAKOTA version.

- std::time_t startTime

  cached starting time in raw seconds

- short outputLevel

  verbosity control

8.142.1 Detailed Description

curl library

The documentation for this class was generated from the following files:

- TrackerHTTP.H
- TrackerHTTP.C

8.143 Variables Class Reference

Base class for the variables class hierarchy.

Inheritance diagram for Variables::



Public Member Functions

- Variables ()
  default constructor
- Variables (const ProblemDescDB &problem_db)
  standard constructor
- Variables (const SharedVariablesData &svd)
  alternate constructor for instantiations on the fly
- Variables (const Variables &vars)
  copy constructor
- virtual ~Variables ()
  destructor
- Variables operator= (const Variables &vars)
  assignment operator
- virtual void reshape (const SizetArray &vc_totals)
  variablesComponents
- virtual void read (std::istream &s)
  read a variables object from an std::istream
- virtual void write (std::ostream &s) const
  write a variables object to an std::ostream
- virtual void write_aprepro (std::ostream &s) const
  write a variables object to an std::ostream in aprepro format
- virtual void read_annotated (std::istream &s)
  read a variables object in annotated format from an istream

- virtual void write_annotated (std::ostream &s) const

  write a variables object in annotated format to an std::ostream

- virtual void read_tabular (std::istream &s)

  read a variables object in tabular format from an istream

- virtual void write_tabular (std::ostream &s) const

  write a variables object in tabular format to an std::ostream

- virtual void read (BiStream &s)

  read a variables object from the binary restart stream

- virtual void write (BoStream &s) const

  write a variables object to the binary restart stream

- virtual void read (MPIUnpackBuffer &s)

  read a variables object from a packed MPI buffer

- virtual void write (MPIPackBuffer &s) const

  write a variables object to a packed MPI buffer

- size_t tv () const

  total number of vars

- size_t cv () const

  number of active continuous vars

- size_t cv_start () const

  start index of active continuous vars

- size_t div () const

  number of active discrete int vars

- size_t div_start () const

  start index of active discrete int vars

- size_t drv () const

  number of active discrete real vars

- size_t drv_start () const

  start index of active discrete real vars

- size_t icv () const

  number of inactive continuous vars

- size_t icv_start () const

  start index of inactive continuous vars

- size_t idiv () const

  number of inactive discrete int vars

- size_t idiv_start () const

  start index of inactive discrete int vars

- size_t idrv () const

  number of inactive discrete real vars

- size_t idrv_start () const

  start index of inactive discrete real vars

- size_t acv () const

  total number of continuous vars

- size_t adiv () const

  total number of discrete integer vars

- size_t adrv () const

  total number of discrete real vars

- const SharedVariablesData & shared_data () const

  return sharedVarsData

- const Real & continuous_variable (size_t index) const

  return an active continuous variable

- const RealVector & continuous_variables () const

  return the active continuous variables

- void continuous_variable (const Real &c_var, size_t index)

  set an active continuous variable

- void continuous_variables (const RealVector &c_vars)

  set the active continuous variables

- int discrete_int_variable (size_t index) const

  return an active discrete integer variable

- const IntVector & discrete_int_variables () const

  return the active discrete integer variables

- void discrete_int_variable (int di_var, size_t index)

set an active discrete integer variable

- void discrete_int_variables (const IntVector &di_vars)

  set the active discrete integer variables

- const Real & discrete_real_variable (size_t index) const

  return an active discrete real variable

- const RealVector & discrete_real_variables () const

  return the active discrete real variables

- void discrete_real_variable (const Real &dr_var, size_t index)

  set an active discrete real variable

- void discrete_real_variables (const RealVector &dr_vars)

  set the active discrete real variables

- StringMultiArrayConstView continuous_variable_labels () const

  return the active continuous variable labels

- void continuous_variable_labels (StringMultiArrayConstView cv_labels)

  set the active continuous variable labels

- void continuous_variable_label (const String &cv_label, size_t index)

  set an active continuous variable label

- StringMultiArrayConstView discrete_int_variable_labels () const

  return the active discrete integer variable labels

- void discrete_int_variable_labels (StringMultiArrayConstView div_labels)

  set the active discrete integer variable labels

- void discrete_int_variable_label (const String &div_label, size_t index)

  set an active discrete integer variable label

- StringMultiArrayConstView discrete_real_variable_labels () const

  return the active discrete real variable labels

- void discrete_real_variable_labels (StringMultiArrayConstView drv_labels)

  set the active discrete real variable labels

- void discrete_real_variable_label (const String &drv_label, size_t index)

  set an active discrete real variable label

- UShortMultiArrayConstView continuous_variable_types () const

  return the active continuous variable types

- UShortMultiArrayConstView discrete_int_variable_types () const
  return the active discrete integer variable types
- UShortMultiArrayConstView discrete_real_variable_types () const
  return the active discrete real variable types
- SizetMultiArrayConstView continuous_variable_ids () const
  return the active continuous variable position identifiers
- const SizetArray & merged_discrete_ids () const
  returns the list of discrete variables merged into a continuous array
- const RealVector & inactive_continuous_variables () const
  return the inactive continuous variables
- void inactive_continuous_variables (const RealVector &ic_vars)
  set the inactive continuous variables
- const IntVector & inactive_discrete_int_variables () const
  return the inactive discrete variables
- void inactive_discrete_int_variables (const IntVector &idi_vars)
  set the inactive discrete variables
- const RealVector & inactive_discrete_real_variables () const
  return the inactive discrete variables
- void inactive_discrete_real_variables (const RealVector &idr_vars)
  set the inactive discrete variables
- StringMultiArrayConstView inactive_continuous_variable_labels () const
  return the inactive continuous variable labels
- void inactive_continuous_variable_labels (StringMultiArrayConstView ic_vars)
  set the inactive continuous variable labels
- StringMultiArrayConstView inactive_discrete_int_variable_labels () const
  return the inactive discrete variable labels
- void inactive_discrete_int_variable_labels (StringMultiArrayConstView idi_vars)
  set the inactive discrete variable labels
- StringMultiArrayConstView inactive_discrete_real_variable_labels () const
  return the inactive discrete variable labels

- void inactive_discrete_real_variable_labels (StringMultiArrayConstView idr_vars)
  set the inactive discrete variable labels
- UShortMultiArrayConstView inactive_continuous_variable_types () const
  return the inactive continuous variable types
- UShortMultiArrayConstView inactive_discrete_int_variable_types () const
  return the inactive discrete integer variable types
- UShortMultiArrayConstView inactive_discrete_real_variable_types () const
  return the inactive discrete real variable types
- SizetMultiArrayConstView inactive_continuous_variable_ids () const
  return the inactive continuous variable position identifiers
- const RealVector & all_continuous_variables () const
  returns a single array with all continuous variables
- void all_continuous_variables (const RealVector &ac_vars)
  sets all continuous variables using a single array
- void all_continuous_variable (const Real &ac_var, size_t index)
  set a variable within the all continuous array
- const IntVector & all_discrete_int_variables () const
  returns a single array with all discrete variables
- void all_discrete_int_variables (const IntVector &adi_vars)
  sets all discrete variables using a single array
- void all_discrete_int_variable (int adi_var, size_t index)
  set a variable within the all discrete array
- const RealVector & all_discrete_real_variables () const
  returns a single array with all discrete variables
- void all_discrete_real_variables (const RealVector &adr_vars)
  sets all discrete variables using a single array
- void all_discrete_real_variable (const Real &adr_var, size_t index)
  set a variable within the all discrete array
- StringMultiArrayView all_continuous_variable_labels () const
  returns a single array with all continuous variable labels
- void all_continuous_variable_labels (StringMultiArrayConstView acv_labels)

sets all continuous variable labels using a single array

- void all_continuous_variable_label (const String &acv_label, size_t index)

  set a label within the all continuous label array

- StringMultiArrayView all_discrete_int_variable_labels () const

  returns a single array with all discrete variable labels

- void all_discrete_int_variable_labels (StringMultiArrayConstView adiv_labels)

  sets all discrete variable labels using a single array

- void all_discrete_int_variable_label (const String &adiv_label, size_t index)

  set a label within the all discrete label array

- StringMultiArrayView all_discrete_real_variable_labels () const

  returns a single array with all discrete variable labels

- void all_discrete_real_variable_labels (StringMultiArrayConstView adrv_labels)

  sets all discrete variable labels using a single array

- void all_discrete_real_variable_label (const String &adrv_label, size_t index)

  set a label within the all discrete label array

- UShortMultiArrayConstView all_continuous_variable_types () const

  return all continuous variable types

- UShortMultiArrayConstView all_discrete_int_variable_types () const

  return all discrete variable types

- UShortMultiArrayConstView all_discrete_real_variable_types () const

  return all discrete variable types

- SizetMultiArrayConstView all_continuous_variable_ids () const

  return all continuous variable position identifiers

- Variables copy () const

  for use when a deep copy is needed (the representation is _not_ shared)

- const std::pair< short, short > & view () const

  returns variablesView

- std::pair< short, short > get_view (const ProblemDescDB &problem_db) const

  defines variablesView from problem_db attributes

- void inactive_view (short view2)

  sets the inactive view based on higher level (nested) context

- const String & variables_id () const

  returns the variables identifier string

- const SizetArray & variables_components_totals () const

  returns the number of variables for each of the constitutive components

- bool is_null () const

  function to check variablesRep (does this envelope contain a letter)

Protected Member Functions

- Variables (BaseConstructor, const ProblemDescDB &problem_db, const std::pair< short, short > &view)

  derived class constructors - Coplien, p. 139)

- Variables (BaseConstructor, const SharedVariablesData &svd)

  derived class constructors - Coplien, p. 139)

- virtual void build_active_views ()

  construct active views of all variables arrays

- virtual void build_inactive_views ()

  construct inactive views of all variables arrays

- void build_views ()

  construct active/inactive views of all variables arrays

Protected Attributes

- SharedVariablesData sharedVarsData

  reference-counted instance of shared variables data: id's, labels, counts

- RealVector allContinuousVars

  array combining all of the continuous variables (design, uncertain, state)

- IntVector allDiscreteIntVars

  array combining all of the discrete integer variables (design, state)

- RealVector allDiscreteRealVars

  array combining all of the discrete real variables (design, state)

- size_t cvStart

  start index of active continuous variables within allContinuousVars

- size_t divStart

  start index of active discrete integer variables within allDiscreteIntVars

- size_t drvStart

  start index of active discrete real variables within allDiscreteRealVars

- size_t icvStart

  start index of inactive continuous variables within allContinuousVars

- size_t idivStart

  start index of inactive discrete integer variables w/i allDiscreteIntVars

- size_t idrvStart

  start index of inactive discrete real variables within allDiscreteRealVars

- size_t numCV

  number of active continuous variables

- size_t numDIV

  number of active discrete integer variables

- size_t numDRV

  number of active discrete real variables

- size_t numICV

  number of inactive continuous variables

- size_t numIDIV

  number of inactive discrete integer variables

- size_t numIDRV

  number of inactive discrete real variables

- RealVector continuousVars

  the active continuous variables array view

- IntVector discreteIntVars

  the active discrete integer variables array view

- RealVector discreteRealVars

  the active discrete real variables array view

- RealVector inactiveContinuousVars

  the inactive continuous variables array view

- IntVector inactiveDiscreteIntVars

  the inactive discrete integer variables array view

- RealVector inactiveDiscreteRealVars

  the inactive discrete real variables array view

Private Member Functions

- Variables * get_variables (const ProblemDescDB &problem_db)

  correct letter class

- Variables * get_variables (const SharedVariablesData &svd) const

  and by copy() to instantiate a new letter class

- void check_view_compatibility ()

  perform sanity checks on view.first and view.second after update

Private Attributes

- Variables * variablesRep

  pointer to the letter (initialized only for the envelope)

- int referenceCount

  number of objects sharing variablesRep

Friends

- bool operator== (const Variables &vars1, const Variables &vars2)

  equality operator

- bool operator!= (const Variables &vars1, const Variables &vars2)

  inequality operator

- std::size_t hash_value (const Variables &vars)

  hash_value

- bool binary_equal_to (const Variables &vars1, const Variables &vars2)

  binary_equal_to (since 'operator==' is not suitable for boost/hash_set)

8.143.1 Detailed Description

Base class for the variables class hierarchy.

The Variables class is the base class for the class hierarchy providing design, uncertain, and state variables for continuous and discrete domains within a Model. Using the fundamental arrays from the input specification, different derived classes define different views of the data. For memory efficiency and enhanced polymorphism, the variables hierarchy employs the "letter/envelope idiom" (see Coplien "Advanced C++", p. 133), for which the base class (Variables) serves as the envelope and one of the derived classes (selected in Variables::get_variables()) serves as the letter.

8.143.2 Constructor & Destructor Documentation

8.143.2.1 Variables ()

default constructor

The default constructor: variablesRep is NULL in this case (a populated problem_db is needed to build a meaningful Variables object). This makes it necessary to check for NULL in the copy constructor, assignment operator, and destructor.

8.143.2.2 Variables (const ProblemDescDB & *problem_db*)

standard constructor

This is the primary envelope constructor which uses problem_db to build a fully populated variables object. It only needs to extract enough data to properly execute get_variables(problem_db), since the constructor overloaded with BaseConstructor builds the actual base class data inherited by the derived classes.

8.143.2.3 Variables (const SharedVariablesData & *svd*)

alternate constructor for instantiations on the fly

This is the alternate envelope constructor for instantiations on the fly. This constructor executes get_variables(view), which invokes the default derived/base constructors, followed by a resize() based on vars_comps.

8.143.2.4 Variables (const Variables & *vars*)

copy constructor

Copy constructor manages sharing of variablesRep and incrementing of referenceCount.

8.143.2.5 ~Variables () [virtual]

destructor

Destructor decrements referenceCount and only deletes variablesRep when referenceCount reaches zero.

8.143.2.6 Variables (BaseConstructor, const ProblemDescDB & *problem_db*, const std::pair< short, short > & *view*) [protected]

derived class constructors - Coplien, p. 139)

This constructor is the one which must build the base class data for all derived classes. get_variables() instantiates a derived class letter and the derived constructor selects this base class constructor in its initialization list (to avoid the recursion of the base class constructor calling get_variables() again). Since the letter IS the representation, its representation pointer is set to NULL (an uninitialized pointer causes problems in ~Variables).

8.143.2.7 Variables (BaseConstructor, const SharedVariablesData & *svd*) [protected]

derived class constructors - Coplien, p. 139)

This constructor is the one which must build the base class data for all derived classes. get_variables() instantiates a derived class letter and the derived constructor selects this base class constructor in its initialization list (to avoid the recursion of the base class constructor calling get_variables() again). Since the letter IS the representation, its representation pointer is set to NULL (an uninitialized pointer causes problems in ~Variables).

8.143.3 Member Function Documentation

8.143.3.1 Variables operator= (const Variables & *vars*)

assignment operator

Assignment operator decrements referenceCount for old variablesRep, assigns new variablesRep, and increments referenceCount for new variablesRep.

8.143.3.2 Variables copy () const

for use when a deep copy is needed (the representation is _not_ shared)

Deep copies are used for history mechanisms such as bestVariablesArray and data_pairs since these must catalogue copies (and should not change as the representation within currentVariables changes).

8.143.3.3 void build_views () [inline, protected]

construct active/inactive views of all variables arrays

= EMPTY)

= EMPTY)

8.143.3.4 Variables * get_variables (const ProblemDescDB & *problem_db*) [private]

correct letter class

Initializes variablesRep to the appropriate derived type, as given by problem_db attributes. The standard derived class constructors are invoked.

8.143.3.5 Variables * get_variables (const SharedVariablesData & *svd*) const [private]

and by copy() to instantiate a new letter class

Initializes variablesRep to the appropriate derived type, as given by view. The default derived class constructors are invoked.

The documentation for this class was generated from the following files:

- DakotaVariables.H
- DakotaVariables.C

8.144 Verification Class Reference

Base class for managing common aspects of verification studies.

Inheritance diagram for Verification::



Protected Member Functions

- Verification (Model &model)

  constructor

- Verification (NoDBBaseConstructor, Model &model)

  alternate constructor for instantiations "on the fly"

- ~Verification ()

  destructor

- void run ()

  and may include pre/post steps in lieu of separate pre/post

- void print_results (std::ostream &s)

  print the final iterator results

- virtual void perform_verification ()=0

  Redefines the run_iterator virtual function for the PStudy/DACE branch.

8.144.1 Detailed Description

Base class for managing common aspects of verification studies.

The Verification base class manages common data and functions, such as those involving ...

8.144.2 Member Function Documentation

8.144.2.1 void run () [inline, protected, virtual]

and may include pre/post steps in lieu of separate pre/post

Virtual run function for the iterator class hierarchy. All derived classes need to redefine it.

Reimplemented from Iterator.

8.144.2.2 void print_results (std::ostream & *s*) [protected, virtual]

print the final iterator results

This virtual function provides additional iterator-specific final results outputs beyond the function evaluation summary printed in finalize_run().

Reimplemented from Analyzer.

Reimplemented in RichExtrapVerification.

The documentation for this class was generated from the following files:

- DakotaVerification.H
- DakotaVerification.C

Chapter 9

DAKOTA File Documentation

9.1 dll_api.C File Reference

This file contains a DakotaRunner class, which launches DAKOTA.

Namespaces

- namespace Dakota

Functions

- void signal_init ()

  initialize signal handlers

- void DAKOTA_DLL_FN dakota_create (int ∗dakota_ptr_int, char ∗logname)

  create and configure a new DakotaRunner, adding it to list of instances

- int DAKOTA_DLL_FN dakota_readInput (int id, char ∗dakotaInput)

  command DakotaRunner instance id to read from file dakotaInput

- void DAKOTA_DLL_FN dakota_get_variable_info (int id, char ∗∗∗pVarNames, int ∗pNumVarNames, char ∗∗∗pRespNames, int ∗pNumRespNames)

  return the variable and response names

- int DAKOTA_DLL_FN dakota_start (int id)

  command DakotaRunner instance id to start (plugin interface and run strategy)

- void DAKOTA_DLL_FN dakota_destroy (int id)

  delete Dakota runner instance id and remove from active list

- void DAKOTA_DLL_FN dakota_stop (int ∗id)

command DakotaRunner instance id to stop execution

- const char ∗DAKOTA_DLL_FN dakota_getStatus (int id)

  return current results output as a string

- int get_mc_ptr_int ()

  get the DAKOTA pointer to ModelCenter

- void set_mc_ptr_int (int ptr_int)

  set the DAKOTA pointer to ModelCenter

- int get_dc_ptr_int ()

  get the DAKOTA pointer to ModelCenter current design point

- void set_dc_ptr_int (int ptr_int)

  set the DAKOTA pointer to ModelCenter current design point

Variables

- PRPCache data_pairs

  contains all parameter/response pairs.

- std::map< int, DakotaRunner ∗ > runners

  map from DakotaRunner id to instance

9.1.1 Detailed Description

This file contains a DakotaRunner class, which launches DAKOTA.

9.1.2 Function Documentation

9.1.2.1 void DAKOTA_DLL_FN dakota_stop (int ∗ *id*)

command DakotaRunner instance id to stop execution

TODO: trick application to quit through the syscall interface or throw exception.

9.2 dll_api.h File Reference

API for DLL interactions.

Functions

- void DAKOTA_DLL_FN dakota_create (int ∗dakota_ptr_int, char ∗logname)

  create and configure a new DakotaRunner, adding it to list of instances

- int DAKOTA_DLL_FN dakota_readInput (int id, char ∗dakotaInput)

  command DakotaRunner instance id to read from file dakotaInput

- int DAKOTA_DLL_FN dakota_start (int id)

  command DakotaRunner instance id to start (plugin interface and run strategy)

- void DAKOTA_DLL_FN dakota_destroy (int id)

  delete Dakota runner instance id and remove from active list

- void DAKOTA_DLL_FN dakota_stop (int ∗id)

  command DakotaRunner instance id to stop execution

- const char ∗DAKOTA_DLL_FN dakota_getStatus (int id)

  return current results output as a string

- int DAKOTA_DLL_FN get_mc_ptr_int ()

  get the DAKOTA pointer to ModelCenter

- void DAKOTA_DLL_FN set_mc_ptr_int (int ptr_int)

  set the DAKOTA pointer to ModelCenter

- int DAKOTA_DLL_FN get_dc_ptr_int ()

  get the DAKOTA pointer to ModelCenter current design point

- void DAKOTA_DLL_FN set_dc_ptr_int (int ptr_int)

  set the DAKOTA pointer to ModelCenter current design point

- void DAKOTA_DLL_FN dakota_get_variable_info (int id, char ∗∗∗pVarNames, int ∗pNumVarNames, char ∗∗∗pRespNames, int ∗pNumRespNames)

  return the variable and response names

9.2.1 Detailed Description

API for DLL interactions.

9.2.2 Function Documentation

9.2.2.1 void DAKOTA_DLL_FN dakota_stop (int * *id*)

command DakotaRunner instance id to stop execution

TODO: trick application to quit through the syscall interface or throw exception.

9.3 JEGAOptimizer.C File Reference

Contains the implementation of the JEGAOptimizer class.

Namespaces

- namespace Dakota
- namespace **JEGA::Logging**
- namespace **eddy::utilities**

Classes

- class JEGAOptimizer::Evaluator

  An evaluator specialization that knows how to interact with Dakota.

- class JEGAOptimizer::EvaluatorCreator

  A specialization of the JEGA::FrontEnd::EvaluatorCreator that creates a new instance of a Evaluator.

- class JEGAOptimizer::Driver

  A subclass of the JEGA front end driver that exposes the individual protected methods to execute the algorithm.

Functions

- template<typename T> string asstring (const T &val)

  Creates a string from the argument val *using an ostringstream.*

9.3.1 Detailed Description

Contains the implementation of the JEGAOptimizer class.

9.4 JEGAOptimizer.H File Reference

Contains the definition of the JEGAOptimizer class.

Namespaces

- namespace **JEGA**
- namespace **JEGA::Utilities**
- namespace **JEGA::FrontEnd**
- namespace **JEGA::Algorithms**
- namespace Dakota

Classes

- class JEGAOptimizer

  A version of Dakota::Optimizer for instantiation of John Eddy's Genetic Algorithms (JEGA).

9.4.1 Detailed Description

Contains the definition of the JEGAOptimizer class.

9.5 library_mode.C File Reference

file containing a mock simulator main for testing DAKOTA in library mode

Namespaces

- namespace Dakota

Functions

- void nidr_set_input_string (const char ∗)

  Set input to NIDR via string argument instead of input file.

- int **nidr_save_exedir** (const char ∗, int)
- void run_dakota_parse (const char ∗dakota_input_file)

  mode 1: parsing an input file.

- void run_dakota_data ()

  mode 2: direct Data class instantiation.

- void run_dakota_mixed (const char ∗dakota_input_file)

  mode 3: mixed parsing and direct updating

- void model_interface_plugins (Dakota::ProblemDescDB &problem_db)
- int main (int argc, char ∗argv[ ])

  A mock simulator main for testing DAKOTA in library mode.

- void run_dakota_data ()

  mode 2: direct Data class instantiation.

- static void my_callback_function (void ∗ptr)

9.5.1 Detailed Description

file containing a mock simulator main for testing DAKOTA in library mode

9.5.2 Function Documentation

9.5.2.1 void run_dakota_parse (const char ∗ *dakota_input_file*)

mode 1: parsing an input file.

This function parses from an input file to define the ProblemDescDB data.

9.5.2.2 void run_dakota_mixed (const char * *dakota_input_file*)

mode 3: mixed parsing and direct updating

This function showcases multiple features. For parsing, either an input file (dakota_input_file != NULL) or a default input string (dakota_input_file == NULL) are shown. This parsed input is then mixed with input from three sources: (1) input from a user-supplied callback function, (2) updates to the DB prior to Strategy instantiation, (3) updates directly to Iterators/Models following Strategy instantiation.

9.5.2.3 void model_interface_plugins (Dakota::ProblemDescDB & *problem_db*)

Iterate over models and plugin appropriate interface: serial rosenbrock or parallel textbook.

9.5.2.4 int main (int *argc*, char * *argv*[ ])

A mock simulator main for testing DAKOTA in library mode.

Uses alternative instantiation syntax as described in the library mode documentation within the Developers Manual. Tests several problem specification modes: (1) run_dakota_parse: reads all problem specification data from an input file (2) run_dakota_data: creates all problem specification from direct Data instance instantiations. (3) run_dakota_mixed: a mixture of input parsing (by file or default string) and direct data updates, where the data updates occur: (a) via the DB prior to Strategy instantiation, and (b) via Iterators/Models following Strategy instantiation. Usage: dakota_library_mode [-m] [dakota.in]

9.5.2.5 static void my_callback_function (void * *ptr*) [static]

Example of user-provided callback function to override input specified and managed by NIDR, e.g., from an input deck.

9.6 library_split.C File Reference

file containing a mock simulator main for testing DAKOTA in library mode on a split communicator

Functions

- void manage_mpi (MPI_Comm &my_comm, int &color)
  Split MPI_COMM_WORLD, returning the comm and color.
- void gen_dakota_input (const int &color, std::string &input)
  Return the appropriate DAKOTA input based on color (1 or 2).
- void run_dakota (const MPI_Comm &comm, const std::string &input, const int &color)
  Launch DAKOTA on passed communicator, tagging output/error with color.
- void collect_results ()
  Wait for and collect results from DAKOTA runs.
- void nidr_set_input_string (const char ∗)
  Set input to NIDR via string argument instead of input file.
- int main (int argc, char ∗argv[ ])
  processors

9.6.1 Detailed Description

file containing a mock simulator main for testing DAKOTA in library mode on a split communicator

9.7 main.C File Reference

file containing the main program for DAKOTA

Functions

- void fpinit_ASL ()
- int **nidr_save_exedir** (const char ∗, int)
- int main (int argc, char ∗argv[ ])

  The main DAKOTA program.

9.7.1 Detailed Description

file containing the main program for DAKOTA

9.7.2 Function Documentation

9.7.2.1 void fpinit_ASL ()

Floating-point initialization from AMPL: switch to 53-bit rounding if appropriate, to eliminate some cross-platform differences.

9.7.2.2 int main (int *argc*, char ∗ *argv*[ ])

The main DAKOTA program.

Manage command line inputs, input files, restart file(s), output streams, and top level parallel iterator communicators. Instantiate the Strategy and invoke its run_strategy() virtual function.

9.8 restart_util.C File Reference

file containing the DAKOTA restart utility main program

Namespaces

- namespace Dakota

Functions

- void print_restart (int argc, char **argv, String print_dest)
  print a restart file
- void print_restart_tabular (int argc, char **argv, String print_dest)
  print a restart file (tabular format)
- void read_neutral (int argc, char **argv)
  read a restart file (neutral file format)
- void repair_restart (int argc, char **argv, String identifier_type)
  repair a restart file by removing corrupted evaluations
- void concatenate_restart (int argc, char **argv)
  concatenate multiple restart files
- int **nidr_save_exedir** (const char *, int)
- int main (int argc, char *argv[ ])
  The main program for the DAKOTA restart utility.

9.8.1 Detailed Description

file containing the DAKOTA restart utility main program

9.8.2 Function Documentation

9.8.2.1 int main (int *argc*, char * *argv*[ ])

The main program for the DAKOTA restart utility.

Parse command line inputs and invoke the appropriate utility function (print_restart(), print_restart_tabular(), read_neutral(), repair_restart(), or concatenate_restart()).

Chapter 10

Recommended Practices for DAKOTA Development

10.1 Introduction

Common code development practices can be extremely useful in multiple developer environments. Particular styles for code components lead to improved readability of the code and can provide important visual cues to other developers.

Much of this recommended practices document is borrowed from the CUBIT mesh generation project, which in turn borrows its recommended practices from other projects. As a result, C++ coding styles are fairly standard across a variety of Sandia software projects in the engineering and computational sciences.

10.2 Style Guidelines

Style guidelines involve the ability to discern at a glance the type and scope of a variable or function.

10.2.1 Class and variable styles

Class names should be composed of two or more descriptive words, with the first character of each word capitalized, e.g.:

```
class ClassName;
```

Class member variables should be composed of two or more descriptive words, with the first character of the second and succeeding words capitalized, e.g.:

```
double classMemberVariable;
```

Temporary (i.e. local) variables are lower case, with underscores separating words in a multiple word temporary variable, e.g.:

```
int temporary_variable;
```

Constants (i.e. parameters) and enumeration values are upper case, with underscores separating words, e.g.:

```
const double CONSTANT_VALUE;
```

10.2.2 Function styles

Function names are lower case, with underscores separating words, e.g.:

```
int function_name();
```

There is no need to distinguish between member and non-member functions by style, as this distinction is usually clear by context. This style convention allows member function names which set and return the value of a similarly-named private member variable, e.g.:

```
int memberVariable;
void member_variable(int a) { // set
  memberVariable = a;
}
int member_variable() const { // get
  return memberVariable;
}
```

In cases where the data to be set or returned is more than a few bytes, it is highly desirable to employ const references to avoid unnecessary copying, e.g.:

```
void continuous_variables(const RealVector& c_vars) { // set
  continuousVariables = c_vars;
}
const RealVector& continuous_variables() const {      // get
  return continuousVariables;
}
```

Note that it is not necessary to always accept the returned data as a const reference. If it is desired to be able change this data, then accepting the result as a new variable will generate a copy, e.g.:

```
const RealVector& c_vars = model.continuous_variables(); // reference to continuousVariables cannot be changed
RealVector c_vars = model.continuous_variables();        // local copy of continuousVariables can be changed
```

10.2.3 Miscellaneous

Appearance of typedefs to redefine or alias basic types is isolated to a few header files (`data_types.h`, `template_defs.h`), so that issues like program precision can be changed by changing a few lines of typedefs rather than many lines of code, e.g.:

```
typedef double Real;
```

`xemacs` is the preferred source code editor, as it has C++ modes for enhancing readability through color (turn on "Syntax highlighting"). Other helpful features include "Paren highlighting" for matching parentheses and the "New Frame" utility to have more than one window operating on the same set of files (note that this is still the same edit session, so all windows are synchronized with each other). Window width should be set to 80 internal columns, which can be accomplished by manual resizing, or preferably, using the following alias in your shell resource file (e.g., .cshrc):

```
alias xemacs "xemacs -g 81x63"
```

where an external width of 81 gives 80 columns internal to the window and the desired height of the window will vary depending on monitor size. This window width imposes a coding standard since you should avoid line wrapping by continuing anything over 80 columns onto the next line.

Indenting increments are 2 spaces per indent and comments are aligned with the code they describe, e.g.:

```
void abort_handler(int code)
{
  int initialized = 0;
  MPI_Initialized(&initialized);
  if (initialized) {
    // comment aligned to block it describes
    int size;
    MPI_Comm_size(MPI_COMM_WORLD, &size);
    if (size>1)
      MPI_Abort(MPI_COMM_WORLD, code);
    else
      exit(code);
  }
  else
    exit(code);
}
```

Also, the continuation of a long command is indented 2 spaces, e.g.:

```
  const String& iterator_scheduling
    = problem_db.get_string("strategy.iterator_scheduling");
```

and similar lines are aligned for readability, e.g.:

```
  cout << "Numerical gradients using " << finiteDiffStepSize*100. << "%"
       << finiteDiffType << " differences\nto be calculated by the "
       << methodSource << " finite difference routine." << endl;
```

Lastly, #ifdef's are not indented (to make use of syntax highlighting in xemacs).

10.3 File Naming Conventions

In addition to the style outlined above, the following file naming conventions have been established for the DAKOTA project.

File names for C++ classes should, in general, use the same name as the class defined by the file. Exceptions include:

- with the introduction of the Dakota namespace, base classes which previously utilized prepended Dakota identifiers can now safely omit the identifiers. However, since file names do not have namespace protection from name collisions, they retain the prepended Dakota identifier. For example, a class previously named DakotaModel which resided in DakotaModel.[CH], is now Dakota::Model (class Model in namespace Dakota) residing in the same filenames. The retention of the previous filenames reduces the possibility of multiple instances of a Model.H causing problems. Derived classes (e.g., NestedModel) do not require a prepended Dakota identifier for either the class or file names.
- in a few cases, it is convenient to maintain several closely related classes in a single file, in which case the file name may reflect the top level class or some generalization of the set of classes (e.g., DakotaResponse.[CH] files contain Dakota::Response and Dakota::ResponseRep classes, and DakotaBinStream.[CH] files contain the Dakota::BiStream and Dakota::BoStream classes).

The type of file is determined by one of the four file name extensions listed below:

- **.H** A class header file ends in the suffix .H. The header file provides the class declaration. This file does not contain code for implementing the methods, except for the case of inline functions. Inline functions are to be placed at the bottom of the file with the keyword inline preceding the function name.
- **.C** A class implementation file ends in the suffix .C. An implementation file contains the definitions of the members of the class.
- **.h** A header file ends in the suffix .h. The header file contains information usually associated with procedures. Defined constants, data structures and function prototypes are typical elements of this file.
- **.c** A procedure file ends in the suffix .c. The procedure file contains the actual procedures.

10.4 Class Documentation Conventions

Class documentation uses the doxygen tool available from http://www.doxygen.org and employs the JAVA-doc comment style. Brief comments appear in header files next to the attribute or function declaration. Detailed descriptions for functions should appear alongside their implementations (i.e., in the .C files for non-inlined, or in the headers next to the function definition for inlined). Detailed comments for a class or a class attribute must go in the header file as this is the only option.

NOTE: Previous class documentation utilities (class2frame and class2html) used the "//-" comment style and comment blocks such as this:

```
//- Class:       Model
//- Description: The model to be iterated by the Iterator.  Contains Variables, Interface, and Response objects.
//- Owner:       Mike Eldred
//- Version: $Id: Dev_Recomm_Pract.dox 4549 2007-09-20 18:25:03Z mseldre $
```

These tools are no longer used, so remaining comment blocks of this type are informational only and will not appear in the documentation generated by doxygen.

Chapter 11

Instructions for Modifying DAKOTA's Input Specification

To modify DAKOTA's input specification (for maintenance or addition of new input syntax), specification maintenance mode must be enabled at DAKOTA configure time with the `-enable-spec-maint` option, e.g.,

```
./configure --enable-spec-maint
```

This will enable regeneration of NIDR and DAKOTA components which must be updated following a spec change.

11.1 Modify dakota.input.nspec

The master input specification dakota.input.nspec in Dakota/src is the primary file to update when making a specification change. It uses the following syntactic elements:

- () for required group specifications
- [] for optional specifications
- | for alternatives
- {} for functions to process keywords to express logical relationships. These syntactic elements can be used to express various dependency relationships in the input specification. It is recommended that you review the existing specification and have an understanding of the constructs in use before attempting to add new ones.

Warning:

- Do *not* skip this step. Attempts to modify the NIDR_keywds.H file in Dakota/src without using the NIDR table generator are very error-prone. Moreover, the input specification provides a reference to the allowable inputs of a particular executable and should be kept in synch with the parser files; modifying the parser files independent of the input specification creates, at a minimum, undocumented features.

- All keywords in dakota.input.nspec are lower case by convention. All user inputs are converted to lower case by the parser prior to keyword match testing, resulting in case insensitive parsing.
- Since the NIDR parser allows abbreviation of keywords, you *must* avoid adding a keyword that could be misinterpreted as an abbreviation for a different keyword within the same top-level keyword, such as "strategy" and "method". For example, adding the keyword "expansion" within the method specification would be a mistake if the keyword "expansion_factor" already was being used in this specification.
- The NIDR input is somewhat order-dependent, allowing the same keyword to be reused multiple times in the specification. This often happens with aliases, such as `lower_bounds`, `upper_bounds` and `initial_point`. Ambiguities are resolved by attaching a keyword to the most recently seen context in which it could appear, if such exists, or to the first relevant context that subsequently comes along in the input file. With the earlier IDR parser, non-exclusive specifications (those not in mutually exclusive blocks) were required to be unique. That is why there are such aliases for `initial_point` as `cdv_initial_point` and `ddv_initial_point`: so older input files can be used with no or fewer changes.

11.2 Rebuild generated files

As of DAKOTA 5.1, a separate make command in `packages/nidr` is no longer necessary. When configured with `-enable-spec-maint`, performing a make in Dakota/src will regenerate all files which derive from dakota.input.nspec, including NIDR_keywds.H, **dakota.input.summary**, NIDR_guikywds.H, and dakota.input.desc. If you commit changes to a source repository, be sure to commit any automatically generated files in addition to any modified in the following steps. It is not strictly necessary to run make at this point in the sequence, and in fact may generate errors if necessary handlers aren't yet available. One may optionally

```
cd Dakota/src
make nidr-files
```

to only rebuild generated dependencies of dakota.input.nspec.

11.3 Update NIDRProblemDescDB.C in Dakota/src

Many keywords have data associated with them: an integer, a floating-point number, a string, or arrays of such entities. Data requirements are specified in dakota.input.nspec by the tokens INTEGER, REAL, STRING, INTERLIST, REALLIST, STRINGLIST. (Some keywords have no associated data and hence no such token.) After each keyword and data token, the dakota.input.nspec file specifies functions that the NIDR parser should call to record the appearance of the keyword and deal with any associated data. The general form of this specification is

{ startfcn, startdata, stopfcn, stopdata }

i.e., a brace-enclosed list of one to four functions and data pointers, with trailing entities taken to be zero if not present; zero for a function means no function will be called. The startfcn must deal with any associated data. Otherwise, the distinction between startfcn and stopfcn is relevant only to keywords that begin a group of keywords (enclosed in parentheses or square brackets). The startfcn is called before other entities in the group are processed, and the stop function is called after they are processed. Top-level keywords often have both startfcn and stopfcn; stopfcn is uncommon but possible for lower-level keywords. The startdata and (if needed) stopdata values are usually pointers to little structures that provide keyword-specific details to generic functions for startfcn and

stopfcn. Some keywords that begin groups (such as "approx_problem" within the top-level "strategy" keyword) have no need of either a startfcn or a stopfcn; this is indicated by "{0}".

Most of the things within braces in dakota.input.nspec are invocations of macros defined in NIDRProblemDescDB.C. The macros simplify writing dakota.input.nspec and make it more readable. Most macro invocations refer to little structures defined in NIDRProblemDescDB.C, usually with the help of other macros, some of which have different definitions in different parts of NIDRProblemDescDB.C. When adding a keyword to dakota.input.nspec, you may need to add a structure definition or even introduce a new data type. NIDRProblemDescDB.C has sections corresponding to each top-level keyword. The top-level keywords are in alphabetical order, and most entites in the section for a top-level keyword are also in alphabetical order. While not required, it is probably good practice to maintain this structure, as it makes things easier to find.

Any integer, real, or string data associated with a keyword are provided to the keyword's startfcn, whose second argument is a pointer to a `Values` structure, defined in header file `nidr.h`.

Example 1: if you added the specification:

```
[method_setting REAL {method_setting_start, &method_setting_details} ]
```

you would provide a function

```
    void NIDRProblemDescDB::
method_setting_start(const char *keyname, Values *val, void **g, void *v)
{ ... }
```

in NIDRProblemDescDB.C. In this example, argument `&method_setting_details` would be passed as `v`, `val->n` (the number of values) would be 1 and `*val->r` would be the REAL value given for the `method_setting` keyword. The `method_setting_start` function would suitably store this value with the help of `method_setting_details`.

For some top-level keywords, `g` (the third argument to the startfcn and stopfcn) provides access to a relevant context. For example, `method_start` (the startfcn for the top-level `method` keyword) executes

```
DataMethod *dm = new DataMethod;
*g = (void*)dm;
```

(and supplies a couple of default values to `dm`). The start functions for lower-level keywords within the `method` keyword get access to `dm` through their `g` arguments. Here is an example:

```
 void NIDRProblemDescDB::
method_str(const char *keyname, Values *val, void **g, void *v)
{
        (*(DataMethod**)g)->**(String DataMethod::**)v = *val->s;
        }
```

In this example, `v` points to a pointer-to-member, and an assignment is made to one of the components of the DataMethod object pointed to by `*g`. The corresponding stopfcn for the top-level `method` keyword is

```
 void NIDRProblemDescDB::
method_stop(const char *keyname, Values *val, void **g, void *v)
{
        DataMethod *p = *(DataMethod**)g;
        pDDBInstance->dataMethodList.insert(*p);
        delete p;
        }
```

which copies the now populated DataMethod object to the right place and cleans up.

Example 2: if you added the specification

```
[method_setting REALLIST {{N_mdm(RealL,methodCoeffs)}
```

then method_RealL (defined in NIDRProblemDescDB.C) would be called as the startfcn, and methodCoeffs would be the name of a (currently nonexistent) component of DataMethod. The N_mdm macro is defined in NIDRProblemDescDB.C; among other things, it turns `RealL` into `NIDRProblemDescDB::method_RealL`. This function is used to process lists of REAL values for several keywords. By looking at the source, you can see that the list values are val->r[i] for 0 <= `i` < val->n.

11.4 Update ProblemDescDB.C in Dakota/src

11.4.1 Augment/update get_<data_type>() functions

The next update step involves extending the database retrieval functions in ProblemDescDB.C. These retrieval functions accept an identifier string and return a database attribute of a particular type, e.g., a RealVector:

```
const RealVector& get_rdv(const String& entry_name);
```

The implementation of each of these functions contains tables of possible entry_name values and associated pointer-to-member values. There is one table for each relevant top-level keyword, with the top-level keyword omitted from the names in the table. Since binary search is used to look for names in these tables, each table must be kept in alphabetical order of its entry names. For example,

```
...
else if ((L = Begins(entry_name, "model."))) {
  if (dbRep->methodDBLocked)
      Locked_db();

  #define P &DataModelRep::
  static KW<RealVector, DataModelRep> RVdmo[] = {     // must be sorted
      {"nested.primary_response_mapping", P primaryRespCoeffs},
      {"nested.secondary_response_mapping", P secondaryRespCoeffs},
      {"surrogate.kriging_conmin_seed", P krigingConminSeed},
      {"surrogate.kriging_correlations", P krigingCorrelations},
      {"surrogate.kriging_max_correlations", P krigingMaxCorrelations},
      {"surrogate.kriging_min_correlations", P krigingMinCorrelations}};
  #undef P

  KW<RealVector, DataModelRep> *kw;
  if ((kw = (KW<RealVector, DataModelRep>*)Binsearch(RVdmo, L)))
      return dbRep->dataModelIter->dataModelRep->*kw->p;
}
```

is the "model" portion of ProblemDescDB::get_rdv(). Based on entry_name, it returns the relevant attribute from a DataModel object. Since there may be multiple model specifications, the `dataModelIter` list iterator identifies which node in the list of DataModel objects is used. In particular, `dataModelList` contains a list of all of the `data_model` objects, one for each time a top-level `model` keyword was seen by the parser. The particular model object used for the data retrieval is managed by `dataModelIter`, which is set in a `set_db_list_nodes()` operation that will not be described here.

There may be multiple DataMethod, DataModel, DataVariables, DataInterface, and/or DataResponses objects. However, only one strategy specification is currently allowed so a list of DataStrategy objects is not needed. Rather, ProblemDescDB::strategySpec is the lone DataStrategy object.

To augment the get_<data_type>() functions, add table entries with new identifier strings and pointer-to-member values that address the appropriate data attributes from the Data class object. The style for the identifier strings is a top-down hierarchical description, with specification levels separated by periods and words separated with underscores, e.g., `"keyword.group_specification.individual_specification"`. Use the `dbRep->listIter->attribute` syntax for variables, interface, responses, and method specifications. For example, the `method_setting` example attribute would be added to `get_drv()` as:

```
{"method_name.method_setting", P methodSetting},
```

inserted at the beginning of the `RVdmo` array shown above (since the name in the existing first entry, i.e., "nested.primary_response_mapping", comes alphabetically after "method_name.method_setting").

11.5 Update Corresponding Data Classes

In this step, we extend the Data class definitions (DataStrategy, DataMethod, DataModel, DataVariables, DataInterface, and/or DataResponses) to include the new attributes referenced in Update NIDRProblemDescDB.C in Dakota/src and Augment/update get_<data_type>() functions.

11.5.1 Update the Data class header file

Add a new attribute to the public data for each of the new specifications. Follow the style guide for class attribute naming conventions (or mimic the existing code).

11.5.2 Update the .C file

Define defaults for the new attributes in the constructor initialization list. Add the new attributes to the assign() function for use by the copy constructor and assignment operator. Add the new attributes to the write(MPIPackBuffer&), read(MPIUnpackBuffer&), and write(ostream&) functions, paying careful attention to the use of a consistent ordering.

11.6 Use get_<data_type>() Functions

At this point, the new specifications have been mapped through all of the database classes. The only remaining step is to retrieve the new data within the constructors of the classes that need it. This is done by invoking the get_<data_type>() function on the ProblemDescDB object using the identifier string you selected in Augment/update get_<data_type>() functions. For example:

```
const String& interface_type = problem_db.get_string("interface.type");
```

passes the `"interface.type"` identifier string to the ProblemDescDB::get_string() retrieval function, which returns the desired attribute from the active DataInterface object.

Warning:

Use of the get_<data_type>() functions is restricted to class constructors, since only in class constructors are the data list iterators (i.e., `dataMethodIter`, `dataModelIter`, `dataVariablesIter`, `dataInterfaceIter`, and `dataResponsesIter`) guaranteed to be set correctly. Outside of the constructors, the database list nodes will correspond to the last set operation, and may not return data from the desired list node.

11.7 Update the Documentation

Doxygen comments should be added to the Data class headers for the new attributes, and the reference manual sections describing the portions of dakota.input.nspec that have been modified should be updated. In particular, the reference manual tables summarizing keywords provide help data to the Jaguar user interface so need to be kept updated.

11.8 Understanding Iterator Flow

This page explains the various phases comprising Iterator::run_iterator(). Prior to Iterator construction, when command-line options are parsed, Boolean run mode flags corresponding to PRERUN, RUN, and POSTRUN are set in ParallelLibrary. If the user didn't specify any specific run modes, the default is for all three to be true (all phases will execute).

Iterator is constructed.

When called, `run_iterator()` sequences:

- `initialize_run()`: unconditionally called, virtual. Performs common initialization such as allocating workspaces, setting communicators and evaluation counts. When re-implementing this virtual, a derived class must call its nearest parent's initialize_run(), typically *before* performing its own implementation steps.
- *Not implemented: pre-run input*
- IF PRERUN, invoke `pre_run()`: virtual function; default no-op. Purpose: derived classes should implement `pre_run()` if they are able to generate all parameter sets (variables) at once, separate from `run()`. Derived implementations should call their nearest parent's pre_run(), typically *before* performing their own steps.
- IF PRERUN, invoke `pre_output()`: non-virtual function; if user requested, output variables to file.
- *Not implemented: run input*
- IF RUN, invoke virtual function `run()`. Purpose: at a minimum, evaluate parameter sets through computing responses; for iterators without pre/post capability, their entire implementation is in `run()` and this is a reasonable default for new Iterators.
- *Not implemented: run output*
- IF POSTRUN, invoke `post_input()`: virtual function, default only print helpful message on mode. Purpose: derived iterators supporting post-run input from file must implement to read file and populate variables/responses (and possibly best points) appropriately. Implementations must check if the user requested file input.
- IF POSTRUN, invoke `post_run()`: virtual function. Purpose: generate statistics / final results. Any analysis that can be done solely on tabular data read by `post_input()` can be done here. Derived re-implementations should call their nearest parent's post-run(), typically *after* performing their specific post-run activities.
- *Not implemented: post-run output*
- `finalize_run()`: unconditionally called, virtual. Purpose: free workspaces. Default base class behavior is no-op, however, derived implementations should call their nearest parent's finalize_run *after* performing their specialized portions.

Iterator is destructed.

Chapter 12

Interfacing with DAKOTA as a Library

12.1 Introduction

It is possible to link the DAKOTA toolkit into another application for use as an algorithm library. This section describes facilities which permit this type of integration.

As part of the normal DAKOTA build process, where `Dakota/configure -prefix=PREFIX` has been run prior to `make` and `make install`, a `libdakota.a` is created and a copy of it is placed in `PREFIX/lib` (PREFIX defaults to /usr/local/Dakota). This library contains all source files from `Dakota/src` excepting the main.C, restart_util.C, and library_mode.C main programs. This library may be linked with another application through inclusion of `-ldakota` on the link line. Library and header paths may also be specified using the `-L` and `-I` compiler options (using `PREFIX/lib` and `PREFIX/include`, respectively). Depending on the configuration used when building this library, other libraries for the vendor optimizers and vendor packages will also be needed to resolve DAKOTA symbols for DOT, NPSOL, OPT++, NCSUOpt, LHS, Teuchos, etc. Copies of these libraries are also placed in `Dakota/lib`. Refer to Linking against the DAKOTA library for additional information.

Warning:

> Users may interface to DAKOTA as a library within other software applications provided that they abide by the terms of the GNU Lesser General Public License (LGPL). Refer to `http://www.gnu.org/licenses/lgpl.html` or contact the DAKOTA team for additional information.

Attention:

> The use of DAKOTA as an algorithm library should be distinguished from the linking of simulations within DAKOTA using the direct application interface (see DirectApplicInterface). In the former, DAKOTA is providing algorithm services to another software application, and in the latter, a linked simulation is providing analysis services to DAKOTA. It is not uncommon for these two capabilities to be used in combination, where a simulation framework provides both the "front end" and the "back end" for DAKOTA.

12.2 Quick start: examples and test code

To learn by example, refer to the files PluginSerialDirectApplicInterface.[CH] and PluginParallelDirectApplicInterface.[CH] in Dakota/src for simple examples of serial and parallel plug-in interfaces. The file library_mode.C in Dakota/src provides example usage of these plug-ins within a mock simulator program that demonstrates the required object instantiation syntax in combination with the three problem database population approaches (input file parsing, data node insertion, and mixed mode). All of this code may be compiled and tested by configuring DAKOTA using the `-with-plugin` option.

12.3 Comparison to main.C

The procedure for utilizing DAKOTA as a library within another application involves a number of steps that are similar to those used in the stand-alone DAKOTA application. The stand-alone procedure can be viewed in the file main.C, and the differences for the library approach are most easily explained with reference to that file. The basic steps of executing DAKOTA include instantiating the ParallelLibrary, CommandLineHandler, and ProblemDescDB objects; managing the DAKOTA input file (ProblemDescDB::manage_inputs()); specifying restart files and output streams (ParallelLibrary::specify_outputs_restart()); and instantiating the Strategy and running it (Strategy::run_strategy()). When using DAKOTA as an algorithm library, the operations are quite similar, although command line information (argc, argv, and therefore CommandLineHandler) will not in general be accessible. In particular, main.C can pass argc and argv into the ParallelLibrary and CommandLineHandler constructors and then pass the CommandLineHandler object into ProblemDescDB::manage_inputs() and ParallelLibrary::specify_outputs_restart(). In an algorithm library approach, a CommandLineHandler object is not instantiated and overloaded forms of the ParallelLibrary constructor, ProblemDescDB::manage_inputs(), and ParallelLibrary::specify_outputs_restart() are used.

The overloaded forms of these functions are as follows. For instantiation of the ParallelLibrary object, the default constructor may be used. This constructor assumes that MPI is administered by the parent application such that the MPI configuration will be detected rather than explicitly created (i.e., DAKOTA will not call MPI_Init or MPI_Finalize). In code, the instantiation

```
ParallelLibrary parallel_lib(argc, argv);
```

is replaced with

```
ParallelLibrary parallel_lib;
```

In the case of specifying restart files and output streams, the call to

```
parallel_lib.specify_outputs_restart(cmd_line_handler);
```

should be replaced with its overloaded form in order to pass the required information through the parameter list

```
parallel_lib.specify_outputs_restart(std_output_filename, std_error_filename,
  read_restart_filename, write_restart_filename, stop_restart_evals);
```

where file names for standard output and error and restart read and write as well as the integer number of restart evaluations are passed through the parameter list rather than read from the command line of the main DAKOTA

program. The definition of these attributes is performed elsewhere in the parent application (e.g., specified in the parent application input file or GUI). In this function call, specify `NULL` for any files not in use, which will elicit the desired subset of the following defaults: standard output and standard error are directed to the terminal, no restart input, and restart output to file `dakota.rst`. The `stop_restart_evals` specification is an optional parameter with a default of 0, which indicates that restart processing should process all records. If no overrides of these defaults are intended, the call to `specify_outputs_restart()` may be omitted entirely.

With respect to alternate forms of ProblemDescDB::manage_inputs(), the following section describes different approaches to populating data within DAKOTA's problem description database. It is this database from which all DAKOTA objects draw data upon instantiation.

12.4 Problem database population

Now that the ProblemDescDB object has been instantiated, we must populate it with data, either via parsing an input file, direct data insertion, or a mixed approach, as described in the following sections.

12.4.1 Input file parsing

The simplest approach to linking an application with the DAKOTA library is to rely on DAKOTA's normal parsing system to populate DAKOTA's problem database (ProblemDescDB) through the reading of an input file. The disadvantage to this approach is the requirement for an additional input file beyond those already required by the parent application.

In this approach, the main.C call to

```
problem_db.manage_inputs(cmd_line_handler);
```

would be replaced with its overloaded form

```
problem_db.manage_inputs(dakota_input_file);
```

where the file name for the DAKOTA input is passed through the parameter list rather than read from the command line of the main DAKOTA program. Again, the definition of the DAKOTA input file name is performed elsewhere in the parent application (e.g., specified in the parent application input file or GUI). Refer to run_dakota_parse() in library_mode.C for a complete example listing.

ProblemDescDB::manage_inputs() invokes ProblemDescDB::parse_inputs() (which in turn invokes ProblemDescDB::check_input()), ProblemDescDB::broadcast(), and ProblemDescDB::post_process(), which are lower level functions that will be important in the following two sections. Thus, the input file parsing approach may employ a single coarse grain function to coordinate all aspects of problem database population, whereas the two approaches to follow will use lower level functions to accomplish a finer grain of control.

12.4.2 Data node insertion

This approach is more involved than the previous approach, but it allows the application to publish all needed data to DAKOTA's database directly, thereby eliminating the need for the parsing of a separate DAKOTA input file. In this case, ProblemDescDB::manage_inputs() is not called. Rather, DataStrategy, DataMethod, DataModel,

DataVariables, DataInterface, and DataResponses objects are instantiated and populated with the desired problem data. These objects are then published to the problem database using ProblemDescDB::insert_node(), e.g.:

```
// instantiate the data object
DataMethod data_method;

// set the attributes within the data object
data_method.methodName = "nond_sampling";
...

// publish the data object to the ProblemDescDB
problem_db.insert_node(data_method);
```

The data objects are populated with their default values upon instantiation, so only the non-default values need to be specified. Refer to the DataStrategy, DataMethod, DataModel, DataVariables, DataInterface, and DataResponses class documentation and source code for lists of attributes and their defaults.

The default strategy is `single_method`, which runs a single iterator on a single model, and the default model is `single`, so it is not necessary to instantiate and publish a DataStrategy or DataModel object if advanced multi-component capabilities are not required. Rather, instantiation and insertion of a single DataMethod, DataVariables, DataInterface, and DataResponses object is sufficient for basic DAKOTA capabilities.

Once the data objects have been published to the ProblemDescDB object, calls to

```
problem_db.check_input();
problem_db.broadcast();
problem_db.post_process();
```

will perform basic database error checking, broadcast a packed MPI buffer of the specification data to other processors, and post-process specification data to fill in vector defaults (scalar defaults are handled in the Data class constructors), respectively. For parallel applications, processor rank 0 should be responsible for Data node population and insertion and the call to ProblemDescDB::check_input(), and all processors should participate in ProblemDescDB::broadcast() and ProblemDescDB::post_process(). Moreover, preserving the order shown assures that large default vectors are not transmitted by MPI. Refer to run_dakota_data() in library_mode.C for a complete example listing.

12.4.3 Mixed mode

In this case, we will combine the parsing of a DAKOTA input file with some direct database updates. The motivation for this approach arises in large-scale applications where large vectors can be awkward to specify in a DAKOTA input file. The first step is to parse the input file, but rather than using

```
problem_db.manage_inputs(dakota_input_file);
```

as described in Input file parsing, we will use the lower level function

```
problem_db.parse_inputs(dakota_input_file);
```

to provide a finer grain of control. The passed input file `dakota_input_file` must contain all required inputs. Since vector data like variable values/bounds/tags, linear/nonlinear constaint coefficients/bounds, etc. are optional, these potentially large vector specifications can be omitted from the input file. Only the variable/response counts, e.g.:

```
method
        linear_inequality_constraints = 500

variables
        continuous_design = 1000

responses
        num_objective_functions = 1
        num_noninear_inequality_constraints = 100000
```

are required in this case. To update the data omissions from their defaults, one uses the ProblemDescDB::set() family of overloaded functions, e.g.

```
Dakota::RealVector drv(1000, 1.); // vector of length 1000, values initialized to 1.
problem_db.set("variables.continuous_design.initial_point", drv);
```

where the string identifiers are the same identifiers used when pulling information from the database using one of the get_<datatype>() functions (refer to the source code of ProblemDescDB.C for a full list). However, the supported ProblemDescDB::set() options are a restricted subset of the database attributes, focused on vector inputs that can be large scale.

If performing these updates within the constructor of a DirectApplicInterface extension/derivation (see Defining the direct application interface), then this code is sufficient since the database is unlocked, the active list nodes of the ProblemDescDB have been set for you, and the correct strategy/method/model/variables/interface/responses specification instance will get updated. The difficulty in this case stems from the order of instantiation. Since the Variables and Response instances are constructed in the base Model class, prior to construction of Interface instances in derived Model classes, database information related to Variables and Response objects will have already been extracted by the time the Interface constructor is invoked and the database update will not propagate.

Therefore, it is preferred to perform these operations at a higher level (e.g., within your main program), prior to Strategy instantiation and execution, such that instantiation order is not an issue. However, in this case, it is necessary to explicitly manage the list nodes of the ProblemDescDB using a specification instance identifier that corresponds to an identifier from the input file, e.g.:

```
problem_db.set_db_variables_node("MY_VARIABLES_ID");
Dakota::RealVector drv(1000, 1.); // vector of length 1000, values initialized to 1.
problem_db.set("variables.continuous_design.initial_point", drv);
```

Alternatively, rather than setting just a single data node, all data nodes may be set using a method specification identifier:

```
problem_db.set_db_list_nodes("MY_METHOD_ID");
```

since the method specification is responsible for identifying a model specification, which in turn identifies variables, interface, and responses specifications. If hardwiring specification identifiers is undesirable, then

```
problem_db.resolve_top_method();
```

can also be used to deduce the active method specification and set all list nodes based on it. This is most appropriate in the case where only single specifications exist for method/model/variables/interface/responses. In each of these cases, setting list nodes unlocks the corresponding portions of the database, allowing set/get operations.

Once all direct database updates have been performed in this manner, calls to ProblemDescDB::broadcast() and ProblemDescDB::post_process() should be used on all processors. The former will broadcast a packed MPI buffer with the aggregated set of specification data from rank 0 to other processors, and the latter will post-process specification data to fill in any vector defaults that have not yet been provided through either file parsing or direct updates (Note: scalar defaults are handled in the Data class constructors). Refer to run_dakota_mixed() in library_mode.C for a complete example listing.

12.5 Instantiating the strategy

With the ProblemDescDB object populated with problem data, we may now instantiate the strategy.

```
// instantiate the strategy
Strategy selected_strategy(problem_db);
```

Following strategy construction, all MPI communicator partitioning has been performed and the ParallelLibrary instance may be interrogated for parallel configuration data. For example, the lowest level communicators in DAKOTA's multilevel parallel partitioning are the analysis communicators, which can be retrieved using:

```
// retrieve the set of analysis communicators for simulation initialization:
// one analysis comm per ParallelConfiguration (PC), one PC per Model.
Array<MPI_Comm> analysis_comms = parallel_lib.analysis_intra_communicators();
```

These communicators can then be used for initializing parallel simulation instances, where the number of MPI communicators in the array corresponds to one communicator per ParallelConfiguration instance.

12.6 Defining the direct application interface

When employing a library interface to DAKOTA, it is frequently desirable to also use a direct interface between DAKOTA and the simulation. There are two approaches to defining this direct interface.

12.6.1 Extension

The first approach involves extending the existing DirectApplicInterface class to support additional direct simulation interfaces. In this case, a new simulation interface function can be added to Dakota/src/DirectApplicInterface.[CH] for the simulation of interest. If the new function will not be a member function, then the following prototype should be used in order to pass the required data:

```
int sim(const Dakota::Variables& vars, const Dakota::ActiveSet& set,
        Dakota::Response& response);
```

If the new function will be a member function, then this can be simplified to

```
int sim();
```

since the data access can be performed through the DirectApplicInterface class attributes.

This simulation can then be added to the logic blocks in DirectApplicInterface::derived_map_ac(). In addition, DirectApplicInterface::derived_map_if() and DirectApplicInterface::derived_map_of() can be extended to perform pre- and post-processing tasks if desired, but this is not required.

While this approach is the simplest, it has the disadvantage that the DAKOTA library may need to be recompiled when the simulation or its direct interface is modified. If it is desirable to maintain the independence of the DAKOTA library from the host application, then the following derivation approach should be employed.

12.6.2 Derivation

The second approach is to derive a new interface from DirectApplicInterface in order to redefine several virtual functions. A typical derived class declaration might be

```
namespace SIM {

class SerialDirectApplicInterface: public Dakota::DirectApplicInterface
{
public:

  // Constructor and destructor

  SerialDirectApplicInterface(const Dakota::ProblemDescDB& problem_db);
  ~SerialDirectApplicInterface();

protected:

  // Virtual function redefinitions

  int derived_map_if(const Dakota::String& if_name);
  int derived_map_ac(const Dakota::String& ac_name);
  int derived_map_of(const Dakota::String& of_name);

private:

  // Data
}

} // namespace SIM
```

where the new derived class resides in the simulation's namespace. Similar to the case of Extension, the DirectApplicInterface::derived_map_ac() function is the required redefinition, and DirectApplicInterface::derived_map_if() and DirectApplicInterface::derived_map_of() are optional.

The new derived interface object (from namespace SIM) must now be plugged into the strategy. In the simplest case of a single model and interface, one could use

```
  // retrieve the interface of interest
  ModelList& all_models  = problem_db.model_list();
  Model&     first_model = *all_models.begin();
  Interface& interface   = first_model.interface();
  // plug in the new direct interface instance (DB does not need to be set)
  interface.assign_rep(new SIM::SerialDirectApplicInterface(problem_db), false);
```

from within the Dakota namespace. In a more advanced case of multiple models and multiple interface plug-ins, one might use

```
// retrieve the list of Models from the Strategy
ModelList& models = problem_db.model_list();
// iterate over the Model list
for (ModelLIter ml_iter = models.begin(); ml_iter != models.end(); ml_iter++) {
  Interface& interface = ml_iter->interface();
  if (interface.interface_type() == "direct" &&
      interface.analysis_drivers().contains("SIM") ) {
    // set the correct list nodes within the DB prior to new instantiations
    problem_db.set_db_model_nodes(ml_iter->model_id());
    // plug in the new direct interface instance
    interface.assign_rep(new SIM::SerialDirectApplicInterface(problem_db), false);
  }
}
```

In the case where the simulation interface instance should manage parallel simulations within the context of an MPI communicator, one should pass in the relevant analysis communicator(s) to the derived constructor. For the latter case of looping over a set of models, the simplest approach of passing a single analysis communicator would use code similar to

```
const ParallelLevel& ea_level = ml_iter->parallel_configuration_iterator()->ea_parallel_level();
const MPI_Comm& analysis_comm = ea_level.server_intra_communicator();
interface.assign_rep(new SIM::ParallelDirectApplicInterface(problem_db, analysis_comm), false);
```

Since Models may be used in multiple parallel contexts and may therefore have a set of parallel configurations, a more general approach would extract and pass an array of analysis communicators to allow initialization for each of the parallel configurations.

New derived direct interface instances inherit various attributes of use in configuring the simulation. In particular, the ApplicationInterface::parallelLib reference provides access to MPI communicator data (e.g., the analysis communicators discussed in Instantiating the strategy), DirectApplicInterface::analysisDrivers provides the analysis driver names specified by the user in the input file, and DirectApplicInterface::analysisComponents provides additional analysis component identifiers (such as mesh file names) provided by the user which can be used to distinguish different instances of the same simulation interface. It is worth noting that inherited attributes that are set as part of the parallel configuration (instead of being extracted from the ProblemDescDB) will be set to their defaults following construction of the base class instance for the derived class plug-in. It is not until run-time (i.e., within derived_map_if/derived_map_ac/derived_map_of) that the parallel configuration settings are repropagated to the plug-in instance. This is the reason that the analysis communicator should be passed in to the constructor of a parallel plug-in, if the constructor will be responsible for parallel application initialization.

12.7 Additional updates

As part of strategy instantiation, all problem specification data is extracted from ProblemDescDB as various objects are constructed. Therefore, any updates that need to be performed following strategy instantiation must be performed through direct set operations on the constructed objects. In the previous section, the process for updating the Interface object used within a Model was shown. To update other data such as variable values/bounds/tags or response bounds/targets/tags, refer to the set functions documented in Iterator and Model. As an example, the following code updates the active continuous variable values, which will be employed as the initial guess for certain classes of Iterators:

```
ModelList& all_models  = problem_db.model_list();
Model&     first_model = *all_models.begin();
Dakota::RealVector drv(1000, 1.); // vector of length 1000, values initialized to 1.
first_model.continuous_variables(drv);
```

12.8 Executing the strategy

Finally, with simulation configuration and plug-ins completed, we execute the strategy:

```
// run the strategy
selected_strategy.run_strategy();
```

12.9 Retrieving data after a run

After executing the strategy, final results can be obtained through the use of Strategy::variables_results() and Strategy::response_results(), e.g.:

```
// retrieve the final parameter values
const Variables& vars = selected_strategy.variables_results();

// retrieve the final response values
const Response& resp  = selected_strategy.response_results();
```

In the case of optimization, the final design is returned, and in the case of uncertainty quantification, the final statistics are returned.

12.10 Linking against the DAKOTA library

This section presumes DAKOTA has been compiled and installed to `PREFIX` using 'make install'. While the DAKOTA build system offers the most up-to-date guidance for what libraries are needed to link against a particular version of DAKOTA, a typical case is presented here. Note that depending on how you configured DAKOTA, some of the following libraries may not be available (for example NPSOL, DOT, NLPQL) – check which appear in `$PREFIX/lib`. Also as of DAKOTA 4.2, the link process is not as sensitive to order of these libraries, with the possible exception of liblhs.a.

As of DAKOTA 5.0, `-levidence` is no longer required and `-lgsl` is optional (discouraged due to GPL), depending on how DAKOTA was configured.

Post DAKOTA 5.0, `-lquadrature` has been renamed to `-lsparsegrid`. Also the DFFTPACK library should be integrated into libpecos, so `-ldfftpack` should not be needed and NKM should be integrated into libsurfpack, so `-lnkm` should not be needed.

```
DAKOTA_LIBS = -L${PREFIX}/lib -ldakota -lteuchos -lpecos -llhs         \
              -lsparsegrid -lsurfpack -lconmin -lddace -ldot -lfsudace \
              -ljega -lcport -lnlpql -lnpsol -lopt -lpsuade -lnewmat   \
              -lncsuopt -lcolin -linterfaces -lmomh -lscolib -lpebbl   \
              -ltinyxml -lutilib -l3po -lboost_signals -lhopspack      \
              -lnidr -lamplsolver -llapack -lblas
```

You may also need `funcadd0.o`, `-lfl` and, if linking with system-provided GSL, `-lgslcblas`. The AMPL solver library may require `-ldl`. If configuring with graphics, you will need to add `-lDGraphics` and system X libraries (partial list here):

```
-lXpm -lXm -lXt -lXmu -lXp -lXext -lX11 -lSM -lICE
```

We have experienced problems with the creation of `libamplsolver.a` on some platforms. Please use the DAKOTA mailing lists for help with any problems.

Finally, it is important to use the same C++ compiler (possibly an MPI wrapper) for compiling DAKOTA and your application and declare the compiler define `-DHAVE_CONFIG_H` when including header files from DAKOTA. This ensures that the platform configuration settings are properly propagated.

12.11 Summary

To utilize the DAKOTA library within a parent software application, the basic steps of main.C and the order of invocation of these steps should be mimicked from within the parent application. Of these steps, ParallelLibrary instantiation, ProblemDescDB::manage_inputs() and ParallelLibrary::specify_outputs_restart() require the use of overloaded forms in order to function in an environment without direct command line access and, potentially, without file parsing. Additional optional steps not performed in main.C include the extension/derivation of the direct interface and the retrieval of strategy results after a run.

DAKOTA's library mode is now in production use within several Sandia and external simulation codes/frameworks.

Chapter 13

Performing Function Evaluations

Performing function evaluations is one of the most critical functions of the DAKOTA software. It can also be one of the most complicated, as a variety of scheduling approaches and parallelism levels are supported. This complexity manifests itself in the code through a series of cascaded member functions, from the top level model evaluation functions, through various scheduling routines, to the low level details of performing a system call, fork, or direct function invocation. This section provides an overview of the primary classes and member functions involved.

13.1 Synchronous function evaluations

For a synchronous (i.e., blocking) mapping of parameters to responses, an iterator invokes Model::compute_response() to perform a function evaluation. This function is all that is seen from the iterator level, as underlying complexities are isolated. The binding of this top level function with lower level functions is as follows:

- Model::compute_response() utilizes Model::derived_compute_response() for portions of the response computation specific to derived model classes.
- Model::derived_compute_response() directly or indirectly invokes Interface::map().
- Interface::map() utilizes ApplicationInterface::derived_map() for portions of the mapping specific to derived application interface classes.

13.2 Asynchronous function evaluations

For an asynchronous (i.e., nonblocking) mapping of parameters to responses, an iterator invokes Model::asynch_compute_response() multiple times to queue asynchronous jobs and then invokes either Model::synchronize() or Model::synchronize_nowait() to schedule the queued jobs in blocking or nonblocking fashion. Again, these functions are all that is seen from the iterator level, as underlying complexities are isolated. The binding of these top level functions with lower level functions is as follows:

- Model::asynch_compute_response() utilizes Model::derived_asynch_compute_response() for portions of the response computation specific to derived model classes.

- This derived model class function directly or indirectly invokes Interface::map() in asynchronous mode, which adds the job to a scheduling queue.
- Model::synchronize() or Model::synchronize_nowait() utilize Model::derived_synchronize() or Model::derived_synchronize_nowait() for portions of the scheduling process specific to derived model classes.
- These derived model class functions directly or indirectly invoke Interface::synch() or Interface::synch_-nowait().
- For application interfaces, these interface synchronization functions are responsible for performing evaluation scheduling in one of the following modes:
  - asynchronous local mode (using ApplicationInterface::asynchronous_local_evaluations() or ApplicationInterface::asynchronous_local_evaluations_nowait())
  - message passing mode (using ApplicationInterface::self_schedule_evaluations() or Application-Interface::static_schedule_evaluations() on the iterator master and ApplicationInterface::serve_-evaluations_synch() or ApplicationInterface::serve_evaluations_peer() on the servers)
  - hybrid mode (using ApplicationInterface::self_schedule_evaluations() or Application-Interface::static_schedule_evaluations() on the iterator master and ApplicationInterface::serve_-evaluations_asynch() on the servers)
- These scheduling functions utilize ApplicationInterface::derived_map() and Application-Interface::derived_map_asynch() for portions of asynchronous job launching specific to derived application interface classes, as well as ApplicationInterface::derived_synch() and ApplicationInterface::derived_-synch_nowait() for portions of job capturing specific to derived application interface classes.

13.3 Analyses within each function evaluation

The discussion above covers the parallelism level of concurrent function evaluations serving an iterator. For the parallelism level of concurrent analyses serving a function evaluation, similar schedulers are involved (ForkApplicInterface::synchronous_local_analyses(), ForkApplicInterface::asynchronous_local_-analyses(), ApplicationInterface::self_schedule_analyses(), ApplicationInterface::serve_analyses_synch(), Fork-ApplicInterface::serve_analyses_asynch()) to support synchronous local, asynchronous local, message passing, and hybrid modes. Not all of the schedulers are elevated to the ApplicationInterface level since the system call and direct function interfaces do not yet support nonblocking local analyses (and therefore support synchronous local and message passing modes, but not asynchronous local or hybrid modes). Fork interfaces, however, support all modes of analysis parallelism.

Chapter 14

Software Tools for DAKOTA Development

14.1 Introduction

DAKOTA development relies on Subversion for revision control and the GNU Autotools for configuration management. This section lists these tools, where to acquire recommended versions, and how to configure them.

14.2 Subversion for Version Control

The DAKOTA project uses Subversion (http://subversion.apache.org/) for software revision control. To checkout DAKOTA it may be necessary to install or upgrade the Subversion client on your system.

As of October 2010, we require Subversion client version 1.6 or newer, due to need for file-based externals. We recommend using 1.6.13 source from http://subversion.tigris.org/downloads/subversion-1.6.13.tar.gz or binary packages available from http://subversion.apache.org/packages.html

To configure and build from source on your machine, the following settings should be used, since DAKOTA is hosted as a FSFS-type repository and numerous components are stored in a repository requiring SSL certificate handling:

```
SVNVER=1.6.13
wget http://subversion.tigris.org/downloads/subversion-$SVNVER.tar.gz
wget http://subversion.tigris.org/downloads/subversion-deps-$SVNVER.tar.gz
tar xzf subversion-$SVNVER.tar.gz
tar xzf subversion-deps-$SVNVER.tar.gz

cd subversion-$SVNVER
./configure --prefix=/apps/subversion/$SVNVER --with-ssl --without-berkeley-db CC=gcc CFLAGS=-O2 CXX=g++ CXXF
make -j 4 && make install
# ALT: make -j 4 && make check && make install
```

If you are an external developer, once Subversion is working, DAKOTA (including externals) can be checked out with the single command

```
svn checkout https://software.sandia.gov/svn/public/dakota/public/trunk Dakota
```

If you are an internal developer, DAKOTA can be checked out with the single command

```
svn checkout https://software.sandia.gov/svn/public/dakota/private/trunk Dakota
```

Note that authentication is required to check out the DAKOTA repository. Contact a member of the DAKOTA development team for more information.

If you experience server timeouts when SVN attempts to fetch external packages through a proxy server, you might need to make a change to your $HOME/.subversion/servers file (generated for you the first time you run svn) by adding

```
[global]
http-proxy-exceptions = localhost, *.intranet.mydomain.com
http-proxy-host = wwwproxy.mydomain.com
```

to the bottom of the file. You should no longer get server timeouts when getting acro from software.sandia.gov. If you find that checking these three packages out from software is unacceptably slow, you may add your hostname to the end of the http-proxy-exceptions line. Finally, svn will prompt you as to whether you wish to accept the SSL certificate from software; type 'p' for permanent.

To set the default editor for Subversion commits, you may add the following to .cshrc (or similar for .bashrc):

```
  setenv EDITOR "xemacs -g 81X50"
```

Version Control with Subversion (http://svnbook.red-bean.com) is a great resource on SVN.

14.3 GNU Autotools for Configuration Management

DAKOTA uses the GNU Autotools (http://www.gnu.org/software/autoconf/) for configuration management. Autoconf-2.60 or newer is required. Developers are currently using the following versions (it is important to use compatible versions of all these tools), though some newer versions are reported to work as well:

1. m4-1.4.4 (http://ftp.gnu.org/gnu/m4/m4-1.4.4.tar.gz)
2. autoconf-2.60 (http://ftp.gnu.org/gnu/autoconf/autoconf-2.60.tar.gz)
3. automake-1.10.3 (http://ftp.gnu.org/gnu/automake/automake-1.10.3.tar.gz)
4. libtool-1.5.24 (http://ftp.gnu.org/gnu/libtool/libtool-1.5.24.tar.gz)

The following alternate tools versions may also work (use compatible versions as listed in a particular row):

```
autoconf           m4      automake  libtool
2.65  21-Nov-2009  1.4.13  1.11.1    2.2.6b
2.64  26-Jul-2009  1.4.13  1.11.1    2.2.6b
2.63  09-Sep-2008  1.4.11  1.11.1    2.2.6b
2.62  08-Apr-2008  1.4.11  1.11.1    2.2.4
2.61  17-Nov-2006  1.4.7   1.11.1    1.5.24
2.60  26-Jun-2006  1.4.4   1.10.3    1.5.24
```

Building the tools in the order listed above (m4, autoconf, automake, libtool) should satisfy dependencies if the newly installed tools are on your PATH. For each PACKAGE the following build process should suffice:

```
tar xzf $PACKAGE.tar.gz
cd $PACKAGE
./configure --prefix=$HOME/local
make
[make check]
make install
```

Index

∼Approximation
Dakota::Approximation, 197
∼BiStream
Dakota::BiStream, 213
∼Constraints
Dakota::Constraints, 249
∼EffGlobalMinimizer
Dakota::EffGlobalMinimizer, 331
∼Interface
Dakota::Interface, 373
∼Iterator
Dakota::Iterator, 383
∼Model
Dakota::Model, 448
∼ProblemDescDB
Dakota::ProblemDescDB, 630
∼Strategy
Dakota::Strategy, 700
∼Variables
Dakota::Variables, 752
_initPts
Dakota::JEGAOptimizer, 395
_model
Dakota::JEGAOptimizer::Evaluator, 403

A
Dakota::CONMINOptimizer, 239
abort_handler_t
Dakota, 93
accepts_multiple_points
Dakota::JEGAOptimizer, 394
actualModel
Dakota::DataFitSurrModel, 263
add_datapoint
Dakota::Graphics, 356
allContinuousIds
Dakota::SharedVariablesDataRep, 673
append_approximation
Dakota::ApproximationInterface, 202
Dakota::DataFitSurrModel, 262
approx_subprob_constraint_eval
Dakota::SurrBasedLocalMinimizer, 717
approx_subprob_objective_eval
Dakota::SurrBasedLocalMinimizer, 717
approxBuilds
Dakota::SurrogateModel, 729
Approximation
Dakota::Approximation, 196, 197
APPSEvalMgr
Dakota::APPSEvalMgr, 206
APPSOptimizer
Dakota::APPSOptimizer, 208
assign_rep
Dakota::Interface, 374
Dakota::Iterator, 386
Dakota::Model, 451
asstring
Dakota, 93
asynchronous_local_analyses
Dakota::ForkApplicInterface, 338
asynchronous_local_evaluations
Dakota::ApplicationInterface, 188
asynchronous_local_evaluations_nowait
Dakota::ApplicationInterface, 189
asynchronous_local_evaluations_static
Dakota::ApplicationInterface, 189
augmented_lagrangian_merit
Dakota::SurrBasedMinimizer, 722
autoCorrection
Dakota::SurrogateModel, 729

B
Dakota::CONMINOptimizer, 238
BAD_OPCODE
CtelRegexp, 254
BAD_PARAM
CtelRegexp, 254
begins
Dakota::String, 704
Bgen
Dakota, 163
BiStream

Dakota::BiStream, 212
BoStream
Dakota::BoStream, 215
build
Dakota::SurfpackApproximation, 708
build_approximation
Dakota::ApproximationInterface, 202
Dakota::DataFitSurrModel, 261
build_global
Dakota::DataFitSurrModel, 263
build_local_multipoint
Dakota::DataFitSurrModel, 263
build_views
Dakota::Constraints, 250
Dakota::Variables, 753

C
Dakota::CONMINOptimizer, 238
CAUVLbl
Dakota, 160
ccv_index_map
Dakota::NestedModel, 470
cdiv_index_map
Dakota::NestedModel, 470
cdrv_index_map
Dakota::NestedModel, 470
CEUVLbl
Dakota, 161
check_status
Dakota::ForkAnalysisCode, 336
check_variables
Dakota::NonDIntegration, 529
checkForEqualityConstraints
Dakota::SurfpackApproximation, 708
clear_all
Dakota::Approximation, 197
clear_current
Dakota::Approximation, 197
Dakota::TANA3Approximation, 736
Clone
Dakota::JEGAOptimizer::Evaluator, 403
close_streams
Dakota::ParallelLibrary, 603
colin_request_to_dakota_request
Dakota::COLINApplication, 219
collect_evaluation_impl
Dakota::COLINApplication, 219
compute_correction
Dakota::SurrogateModel, 728
compute_final_statistics_metric
Dakota::NonDExpansion, 511
compute_statistics
Dakota::NonDExpansion, 511
concatenate_restart
Dakota, 95
conminInfo
Dakota::CONMINOptimizer, 236
constraint0_evaluator
Dakota::SNLLOptimizer, 691
constraint1_evaluator
Dakota::SNLLOptimizer, 691
constraint1_evaluator_gn
Dakota::SNLLLeastSq, 684
constraint2_evaluator
Dakota::SNLLOptimizer, 691
constraint2_evaluator_gn
Dakota::SNLLLeastSq, 685
constraint_violation
Dakota::SurrBasedMinimizer, 723
constraintMappingIndices
Dakota::CONMINOptimizer, 236
Dakota::DOTOptimizer, 327
constraintMappingMultipliers
Dakota::CONMINOptimizer, 237
Dakota::DOTOptimizer, 328
constraintMappingOffsets
Dakota::CONMINOptimizer, 237
Dakota::DOTOptimizer, 328
Constraints
Dakota::Constraints, 248, 249
constraintValues
Dakota::CONMINOptimizer, 236
Dakota::DOTOptimizer, 327
contains
Dakota::String, 704
converge_order
Dakota::RichExtrapVerification, 660
converge_qoi
Dakota::RichExtrapVerification, 660
copy
Dakota::Constraints, 250
Dakota::Variables, 753
create_plots_2d
Dakota::Graphics, 355
create_tabular_datastream
Dakota::Graphics, 355
CreateEvaluator
Dakota::JEGAOptimizer::EvaluatorCreator, 404
CT

Dakota::CONMINOptimizer, 238
CtelRegexp, 252
BAD_OPCODE, 254
BAD_PARAM, 254
EXP_TOO_BIG, 253
GOOD, 253
INDEX_MATCH, 254
INDEX_RANGE, 253
INT_ERROR, 254
OUT_OF_MEM, 253
STARPLUS_EMPTY, 253
STARPLUS_NESTED, 253
STARPLUS_NOTHING, 254
TOO_MANY_PAR, 253
TRAILING, 254
UNMATCH_PAR, 253
CtelRegexp
RStatus, 253
cv_index_map
Dakota::NestedModel, 470

DakFuncs0
Dakota, 96
Dakota, 29
abort_handler_t, 93
asstring, 93
Bgen, 163
CAUVLbl, 160
CEUVLbl, 161
concatenate_restart, 95
DakFuncs0, 96
DAUIVLbl, 161
DAURVLbl, 161
DiscSetLbl, 161
FIELD_NAMES, 95
flush, 92
getdist, 92
getRmax, 93
id_vars_exact_compare, 94
kw_1, 97, 149
kw_10, 99
kw_100, 120
kw_101, 120, 155
kw_102, 120, 155
kw_103, 120
kw_104, 121, 155
kw_105, 121
kw_106, 121
kw_107, 122
kw_108, 122
kw_109, 122
kw_11, 99
kw_110, 122, 156
kw_111, 122
kw_112, 123
kw_113, 123, 156
kw_114, 123
kw_115, 123
kw_116, 123
kw_117, 124
kw_118, 124
kw_119, 124
kw_12, 99
kw_120, 125
kw_121, 125
kw_122, 125
kw_123, 126
kw_124, 126
kw_125, 126
kw_126, 126
kw_127, 127
kw_128, 127
kw_129, 127
kw_13, 100
kw_130, 127
kw_131, 127
kw_132, 128
kw_133, 128
kw_134, 128
kw_135, 129
kw_136, 129
kw_137, 129, 156
kw_138, 129
kw_139, 130
kw_14, 100
kw_140, 130
kw_142, 130
kw_143, 130
kw_144, 131
kw_145, 131
kw_146, 131
kw_147, 131
kw_148, 131
kw_149, 132, 156
kw_15, 100
kw_150, 132
kw_151, 132
kw_152, 132
kw_153, 132

kw_154, 133
kw_155, 133
kw_156, 133
kw_157, 133
kw_158, 133
kw_159, 134
kw_16, 100
kw_160, 134
kw_161, 134
kw_162, 135
kw_163, 135
kw_164, 135
kw_165, 135
kw_166, 135
kw_167, 136
kw_168, 136
kw_169, 136
kw_17, 101
kw_170, 136
kw_171, 137
kw_172, 137
kw_173, 137
kw_174, 137
kw_175, 137
kw_176, 138, 156
kw_177, 138
kw_178, 138
kw_179, 138
kw_18, 101
kw_180, 139
kw_181, 139
kw_182, 139, 157
kw_183, 139
kw_184, 140
kw_185, 140
kw_186, 140
kw_187, 140
kw_188, 140
kw_189, 141
kw_19, 101
kw_190, 141
kw_191, 141
kw_192, 141
kw_193, 142
kw_194, 142
kw_195, 142
kw_196, 142
kw_197, 143
kw_198, 143
kw_199, 143
kw_2, 97, 150
kw_20, 101, 152
kw_200, 143
kw_201, 144
kw_202, 144
kw_203, 144
kw_204, 144
kw_205, 145
kw_206, 145
kw_207, 145
kw_208, 145
kw_209, 146, 157
kw_21, 102, 152
kw_210, 146
kw_211, 146
kw_212, 147
kw_213, 147
kw_214, 147
kw_215, 147
kw_216, 148
kw_217, 148
kw_218, 148
kw_219, 148
kw_22, 102, 152
kw_220, 149, 157
kw_221, 149
kw_223, 149
kw_224, 157
kw_225, 158
kw_226, 158
kw_227, 158
kw_228, 158
kw_229, 159
kw_23, 102
kw_230, 159
kw_231, 159
kw_232, 159
kw_233, 160
kw_234, 160
kw_236, 160
kw_24, 102
kw_25, 102
kw_26, 103, 152
kw_27, 103, 153
kw_28, 103
kw_29, 103
kw_3, 97, 150
kw_30, 104

kw_31, 104
kw_32, 105
kw_33, 105
kw_34, 105, 153
kw_35, 105
kw_36, 106
kw_37, 106, 153
kw_38, 106
kw_39, 106
kw_4, 97, 150
kw_40, 107
kw_41, 107
kw_42, 107
kw_43, 107
kw_44, 108, 153
kw_45, 108
kw_46, 108
kw_47, 108
kw_48, 108, 153
kw_49, 109
kw_5, 97, 150
kw_50, 109
kw_51, 109
kw_52, 109
kw_53, 110
kw_54, 110
kw_55, 110
kw_56, 110, 154
kw_57, 110
kw_58, 111
kw_59, 111
kw_6, 98, 151
kw_60, 111
kw_61, 111
kw_62, 112
kw_63, 112, 154
kw_64, 112
kw_65, 112
kw_66, 112, 154
kw_67, 113, 154
kw_68, 113
kw_69, 113
kw_7, 98, 151
kw_70, 113
kw_71, 113
kw_72, 114
kw_73, 114
kw_74, 114
kw_75, 114
kw_76, 115
kw_77, 115
kw_78, 115
kw_79, 115
kw_8, 98, 151
kw_80, 115, 154
kw_81, 116
kw_82, 116
kw_83, 116
kw_84, 116, 155
kw_85, 116
kw_86, 117
kw_87, 117
kw_88, 117
kw_89, 118
kw_9, 99, 151
kw_90, 118
kw_91, 118
kw_92, 118
kw_93, 118
kw_94, 119, 155
kw_95, 119
kw_96, 119
kw_97, 119
kw_98, 119
kw_99, 120
lookup_by_val, 94
mindist, 92
mindistindx, 92
NUMBER_OF_FIELDS, 96
perform_analysis, 93
print_restart, 94
print_restart_tabular, 94
read_neutral, 95
repair_restart, 95
run_dakota_data, 93
set_compare, 94
slmap, 96
start_dakota_heartbeat, 92
start_grid_computing, 93
stop_grid_computing, 93
var_mp_bgen, 162
var_mp_bgen_audi, 163
var_mp_bgen_audr, 163
var_mp_bgen_dis, 163
var_mp_bgen_eu, 163
var_mp_bndchk, 164
var_mp_ibndchk, 164
Vlch, 162

VLS, 162
Dakota::ActiveSet, 167
Dakota::ActiveSet
derivVarsVector, 169
requestVector, 169
Dakota::AnalysisCode, 170
Dakota::Analyzer, 175
evaluate_parameter_sets, 178
print_results, 178
print_sobol_indices, 179
variance_based_decomp, 179
Dakota::ApplicationInterface, 180
Dakota::ApplicationInterface
asynchronous_local_evaluations, 188
asynchronous_local_evaluations_nowait, 189
asynchronous_local_evaluations_static, 189
duplication_detect, 187
init_serial, 186
map, 186
self_schedule_analyses, 187
self_schedule_evaluations, 188
serve_analyses_synch, 187
serve_evaluations, 187
serve_evaluations_asynch, 190
serve_evaluations_peer, 190
serve_evaluations_synch, 189
static_schedule_evaluations, 188
stop_evaluation_servers, 187
synch, 186
synch_nowait, 186
synchronous_local_evaluations, 189
Dakota::Approximation, 191
∼Approximation, 197
Approximation, 196, 197
clear_all, 197
clear_current, 197
dataOrder, 198
get_approx, 197, 198
operator=, 197
Dakota::ApproximationInterface, 199
Dakota::ApproximationInterface
append_approximation, 202
build_approximation, 202
functionSurfaces, 203
pop_approximation, 203
rebuild_approximation, 202
restore_approximation, 203
restore_available, 203
update_approximation, 201, 202
Dakota::APPSEvalMgr, 204
Dakota::APPSEvalMgr
APPSEvalMgr, 206
isReadyForWork, 206
recv, 206
submit, 206
Dakota::APPSOptimizer, 207
APPSOptimizer, 208
find_optimum, 209
initialize_variables_and_constraints, 209
set_apps_parameters, 209
Dakota::BaseConstructor, 210
Dakota::BiStream, 211
Dakota::BiStream
∼BiStream, 213
BiStream, 212
operator>>, 213
Dakota::BoStream, 214
Dakota::BoStream
BoStream, 215
operator<<, 216
Dakota::COLINApplication, 217
colin_request_to_dakota_request, 219
collect_evaluation_impl, 219
dakota_response_to_colin_response, 219
evaluation_available, 218
map_domain, 219
perform_evaluation_impl, 219
set_problem, 218
spawn_evaluation_impl, 218
Dakota::COLINOptimizer, 220
find_optimum, 222
post_run, 222
Dakota::CollaborativeHybridStrategy, 223
Dakota::CommandLineHandler, 225
Dakota::CommandLineHandler
instantiate_flag, 226
Dakota::CommandShell, 227
Dakota::CommandShell
flush, 228
Dakota::ConcurrentStrategy, 229
Dakota::ConcurrentStrategy
pack_parameters_buffer, 230
pack_results_buffer, 231
unpack_parameters_buffer, 231
unpack_results_buffer, 231
Dakota::CONMINOptimizer, 232
A, 239
B, 238

C, 238
conminInfo, 236
constraintMappingIndices, 236
constraintMappingMultipliers, 237
constraintMappingOffsets, 237
constraintValues, 236
CT, 238
DF, 239
G1, 238
G2, 238
IC, 239
ISC, 239
MS1, 238
N1, 237
N2, 237
N3, 237
N4, 237
N5, 237
optimizationType, 236
printControl, 236
S, 238
SCAL, 238
Dakota::Constraints, 240
~Constraints, 249
build_views, 250
Constraints, 248, 249
copy, 250
get_constraints, 250, 251
manage_linear_constraints, 250
operator=, 250
reshape, 250
Dakota::DataFitSurrModel, 255
Dakota::DataFitSurrModel
actualModel, 263
append_approximation, 262
build_approximation, 261
build_global, 263
build_local_multipoint, 263
derived_asynch_compute_response, 260
derived_compute_response, 260
derived_init_communicators, 262
derived_synchronize, 260
derived_synchronize_nowait, 260
evaluation_id, 263
update_actual_model, 263
update_approximation, 261
update_from_actual_model, 263
Dakota::DataInterface, 265
Dakota::DataInterface
run_dakota_data, 266
Dakota::DataMethod, 267
Dakota::DataMethod
run_dakota_data, 268
Dakota::DataMethodRep, 269
Dakota::DataModel, 282
Dakota::DataModelRep, 284
Dakota::DataResponses, 288
Dakota::DataResponses
run_dakota_data, 289
Dakota::DataResponsesRep, 290
Dakota::DataStrategy, 294
Dakota::DataStrategyRep, 296
Dakota::DataVariables, 299
Dakota::DataVariables
run_dakota_data, 300
Dakota::DataVariablesRep, 302
Dakota::DDACEDesignCompExp, 312
Dakota::DDACEDesignCompExp
DDACEDesignCompExp, 314
num_samples, 315
post_run, 315
pre_run, 314
resolve_samples_symbols, 315
Dakota::DirectApplicInterface, 316
Dakota::DirectApplicInterface
derived_map_ac, 322
derived_synchronous_local_analysis, 322
python_convert_int, 322
Dakota::DOTOptimizer, 324
constraintMappingIndices, 327
constraintMappingMultipliers, 328
constraintMappingOffsets, 328
constraintValues, 327
dotFDSinfo, 326
dotInfo, 326
dotMethod, 327
intCntlParmArray, 327
optimizationType, 327
printControl, 327
realCntlParmArray, 327
Dakota::EffGlobalMinimizer, 329
Dakota::EffGlobalMinimizer
~EffGlobalMinimizer, 331
Dakota::EmbeddedHybridStrategy, 332
Dakota::ForkAnalysisCode, 335
Dakota::ForkAnalysisCode
check_status, 336
Dakota::ForkApplicInterface, 337

Dakota::ForkApplicInterface
asynchronous_local_analyses, 338
derived_synchronous_local_analysis, 338
fork_application, 338
serve_analyses_asynch, 339
synchronous_local_analyses, 339
Dakota::FSUDesignCompExp, 340
Dakota::FSUDesignCompExp
enforce_input_rules, 343
FSUDesignCompExp, 342
num_samples, 343
post_run, 342
pre_run, 342
Dakota::GaussProcApproximation, 344
Dakota::GaussProcApproximation
GaussProcApproximation, 349
GPmodel_apply, 349
Dakota::GetLongOpt, 350
MandatoryValue, 352
OptionalValue, 351
Valueless, 351
Dakota::GetLongOpt
enroll, 352
GetLongOpt, 352
OptType, 351
parse, 352
retrieve, 352
usage, 353
Dakota::Graphics, 354
add_datapoint, 356
create_plots_2d, 355
create_tabular_datastream, 355
new_dataset, 356
Dakota::GridApplicInterface, 357
Dakota::GridApplicInterface
derived_synchronous_local_analysis, 358
Dakota::HierarchSurrModel, 360
Dakota::HierarchSurrModel
derived_asynch_compute_response, 363
derived_compute_response, 362
derived_synchronize, 363
derived_synchronize_nowait, 363
evaluation_id, 363
Dakota::HybridStrategy, 364
Dakota::Interface, 366
∼Interface, 373
assign_rep, 374
get_interface, 374
Interface, 373, 374
operator=, 374
rawResponseMap, 375
Dakota::Iterator, 376
∼Iterator, 383
assign_rep, 386
fdGradStepSize, 387
fdHessByFnStepSize, 387
fdHessByGradStepSize, 387
finalize_run, 385
get_iterator, 386
initialize_graphics, 385
initialize_run, 384
Iterator, 383, 384
num_samples, 385
operator=, 384
post_run, 385
pre_run, 384
print_results, 385
run, 384
run_iterator, 386
Dakota::JEGAOptimizer, 388
_initPts, 395
accepts_multiple_points, 394
find_optimum, 393
GetBestMOSolutions, 392
GetBestSolutions, 392
GetBestSOSolutions, 392
initial_points, 394
JEGAOptimizer, 390
LoadAlgorithmConfig, 391
LoadDakotaResponses, 391
LoadProblemConfig, 391
LoadTheConstraints, 392
LoadTheDesignVariables, 391
LoadTheObjectiveFunctions, 392
LoadTheParameterDatabase, 391
resize_response_results_array, 393
resize_variables_results_array, 393
returns_multiple_points, 394
ToDoubleMatrix, 393
Dakota::JEGAOptimizer::Driver, 396
DestroyAlgorithm, 397
Driver, 396
ExtractAllData, 396
PerformIterations, 397
Dakota::JEGAOptimizer::Evaluator, 398
_model, 403
Clone, 403
Description, 400

Evaluate, 402
Evaluator, 399, 400
GetDescription, 403
GetName, 402
GetNumberLinearConstraints, 402
GetNumberNonLinearConstraints, 401
Name, 400
RecordResponses, 401
SeparateVariables, 401
Dakota::JEGAOptimizer::EvaluatorCreator, 404
Dakota::JEGAOptimizer::EvaluatorCreator
CreateEvaluator, 404
EvaluatorCreator, 404
Dakota::LeastSq, 406
Dakota::LeastSq
finalize_run, 408
get_confidence_intervals, 409
initialize_run, 408
LeastSq, 408
post_run, 408
primary_resp_recast, 409
print_results, 409
read_observed_data, 409
run, 408
Dakota::MergedConstraints, 410
Dakota::MergedConstraints
MergedConstraints, 411
reshape, 411
Dakota::MergedVariables, 412
Dakota::MergedVariables
MergedVariables, 413
read_tabular, 413
Dakota::Minimizer, 414
finalize_run, 419
initialize_run, 419
initialize_scaling, 419
lin_coeffs_modify_n2s, 420
Minimizer, 418
modify_n2s, 420
modify_s2n, 420
need_resp_trans_byvars, 419
response_modify_n2s, 420
response_modify_s2n, 420
secondary_resp_recast, 419
variables_recast, 419
Dakota::MixedConstraints, 422
Dakota::MixedConstraints
MixedConstraints, 423
reshape, 423
Dakota::MixedVariables, 424
Dakota::MixedVariables
MixedVariables, 425
read_tabular, 425
Dakota::Model, 426
∼Model, 448
assign_rep, 451
derivative_concurrency, 452
estimate_derivatives, 452
estimate_message_lengths, 451
FDstep1, 452
FDstep2, 452
get_model, 452
init_communicators, 451
init_serial, 451
interface, 450
interface_id, 450
local_eval_concurrency, 450
local_eval_synchronization, 450
manage_asv, 453
Model, 448
operator=, 449
subordinate_iterator, 449
subordinate_model, 449
subordinate_models, 451
surrogate_model, 449
synchronize_derivatives, 452
truth_model, 449
update_from_subordinate_model, 450
update_quasi_hessians, 453
update_response, 453
Dakota::Model::FDhelp, 454
Dakota::MPIPackBuffer, 455
Dakota::MPIUnpackBuffer, 458
Dakota::NCSUOptimizer, 461
NCSUOptimizer, 463
Dakota::NestedModel, 464
Dakota::NestedModel
ccv_index_map, 470
cdiv_index_map, 470
cdrv_index_map, 470
cv_index_map, 470
derived_asynch_compute_response, 469
derived_compute_response, 469
derived_init_communicators, 469
derived_master_overload, 469
div_index_map, 470
drv_index_map, 470
evaluation_id, 469

response_mapping, 470
subModel, 471
Dakota::NIDRProblemDescDB, 472
Dakota::NIDRProblemDescDB
derived_parse_inputs, 475
Dakota::NL2Res, 477
Dakota::NL2SOLLeastSq, 478
Dakota::NLPQLPOptimizer, 481
Dakota::NLSSOLLeastSq, 486
Dakota::NLSSOLLeastSq
NLSSOLLeastSq, 487
Dakota::NoDBBaseConstructor, 488
Dakota::NonD, 489
Dakota::NonD
finalize_run, 495
initialize_final_statistics, 495
initialize_random_variable_parameters, 496
initialize_random_variable_types, 496
initialize_random_variables, 495
initialize_run, 495
run, 495
set_u_to_x_mapping, 496
vars_u_to_x_mapping, 496
Dakota::NonDAdaptImpSampling, 497
Dakota::NonDAdaptImpSampling
initialize, 500
NonDAdaptImpSampling, 499
Dakota::NonDBayesCalibration, 501
Dakota::NonDBayesCalibration
NonDBayesCalibration, 502
Dakota::NonDCalibration, 503
Dakota::NonDCalibration
NonDCalibration, 503
Dakota::NonDCubature, 504
Dakota::NonDCubature
increment_grid, 506
increment_reference, 506
NonDCubature, 505
sampling_reset, 506
Dakota::NonDExpansion, 507
Dakota::NonDExpansion
compute_final_statistics_metric, 511
compute_statistics, 511
useDerivsFlag, 511
Dakota::NonDGlobalEvidence, 512
Dakota::NonDGlobalInterval, 514
Dakota::NonDGlobalReliability, 518
Dakota::NonDGlobalSingleInterval, 521
Dakota::NonDGPMSABayesCalibration, 523
Dakota::NonDGPMSABayesCalibration
NonDGPMSABayesCalibration, 524
quantify_uncertainty, 525
Dakota::NonDIncremLHSSampling, 526
Dakota::NonDIncremLHSSampling
NonDIncremLHSSampling, 527
quantify_uncertainty, 527
Dakota::NonDIntegration, 528
Dakota::NonDIntegration
check_variables, 529
NonDIntegration, 529
Dakota::NonDInterval, 530
Dakota::NonDLHSEvidence, 533
Dakota::NonDLHSInterval, 535
Dakota::NonDLHSSampling, 537
Dakota::NonDLHSSampling
NonDLHSSampling, 538
quantify_uncertainty, 539
Dakota::NonDLHSSingleInterval, 540
Dakota::NonDLocalEvidence, 542
Dakota::NonDLocalInterval, 544
Dakota::NonDLocalReliability, 547
Dakota::NonDLocalReliability
dg_ds_eval, 552
initial_taylor_series, 551
initialize_class_data, 551
initialize_level_data, 551
initialize_mpp_search_data, 551
probability, 552
reliability, 552
update_level_data, 552
update_mpp_search_data, 551
update_pma_reliability_level, 552
Dakota::NonDLocalSingleInterval, 554
Dakota::NonDPolynomialChaos, 556
Dakota::NonDQuadrature, 558
Dakota::NonDQuadrature
NonDQuadrature, 560
sampling_reset, 560
Dakota::NonDQUESOBayesCalibration, 561
Dakota::NonDQUESOBayesCalibration
NonDQUESOBayesCalibration, 562
quantify_uncertainty, 562
Dakota::NonDReliability, 563
Dakota::NonDReliability
PMA_constraint_eval, 566
PMA_objective_eval, 566
RIA_constraint_eval, 565
RIA_objective_eval, 565

Dakota::NonDSampling, 567
Dakota::NonDSampling
get_parameter_sets, 571
NonDSampling, 570, 571
num_samples, 571
sampling_reset, 571
Dakota::NonDSparseGrid, 573
Dakota::NonDSparseGrid
NonDSparseGrid, 575
sampling_reset, 575
Dakota::NonDStochCollocation, 576
Dakota::NPSOLOptimizer, 577
NPSOLOptimizer, 579
Dakota::Optimizer, 581
finalize_run, 584
initialize_run, 583
multi_objective_retrieve, 584
Optimizer, 583
post_run, 584
primary_resp_recast, 584
print_results, 584
run, 583
weighted_sum, 584
Dakota::ParallelConfiguration, 586
Dakota::ParallelLevel, 589
Dakota::ParallelLibrary, 592
Dakota::ParallelLibrary
close_streams, 603
increment_parallel_configuration, 603
init_communicators, 604
manage_outputs_restart, 603
ParallelLibrary, 602
resolve_inputs, 604
specify_outputs_restart, 603
Dakota::ParamResponsePair, 605
Dakota::ParamResponsePair
evalInterfaceIds, 608
ParamResponsePair, 607
read, 607
write, 607
Dakota::ParamStudy, 609
Dakota::ParamStudy
post_run, 612
pre_run, 612
Dakota::partial_prp_equality, 614
Dakota::partial_prp_hash, 615
Dakota::PecosApproximation, 616
Dakota::ProblemDescDB, 622
Dakota::ProblemDescDB
~ProblemDescDB, 630
get_db, 631
manage_inputs, 631
operator=, 631
parse_inputs, 631
post_process, 631
ProblemDescDB, 630
Dakota::PStudyDACE, 632
Dakota::PStudyDACE
print_results, 633
run, 633
volumetric_quality, 633
Dakota::PSUADEDesignCompExp, 635
Dakota::PSUADEDesignCompExp
enforce_input_rules, 637
num_samples, 637
post_run, 637
pre_run, 637
PSUADEDesignCompExp, 637
Dakota::RecastBaseConstructor, 639
Dakota::RecastModel, 640
Dakota::RecastModel
initialize, 646
RecastModel, 645
update_from_sub_model, 646
Dakota::Response, 647
Response, 651
Dakota::ResponseRep, 652
Dakota::ResponseRep
functionGradients, 657
read, 655, 656
read_annotated, 655
read_tabular, 655
reset, 657
reset_inactive, 657
reshape, 657
ResponseRep, 654
update, 656
update_partial, 656
write, 655, 656
write_annotated, 655
write_tabular, 655
Dakota::RichExtrapVerification, 658
Dakota::RichExtrapVerification
converge_order, 660
converge_qoi, 660
estimate_order, 660
print_results, 659
Dakota::SensAnalysisGlobal, 661

Dakota::SequentialHybridStrategy, 663
Dakota::SequentialHybridStrategy
extract_parameter_sets, 666
pack_parameters_buffer, 665
pack_results_buffer, 665
run_sequential, 666
run_sequential_adaptive, 666
unpack_parameters_buffer, 665
unpack_results_buffer, 665
Dakota::SharedVariablesData, 668
Dakota::SharedVariablesDataRep, 671
Dakota::SharedVariablesDataRep
allContinuousIds, 673
SharedVariablesDataRep, 673
Dakota::SingleMethodStrategy, 674
Dakota::SingleModel, 676
Dakota::SNLLBase, 679
Dakota::SNLLLeastSq, 682
Dakota::SNLLLeastSq
constraint1_evaluator_gn, 684
constraint2_evaluator_gn, 685
nlf2_evaluator_gn, 684
Dakota::SNLLOptimizer, 686
constraint0_evaluator, 691
constraint1_evaluator, 691
constraint2_evaluator, 691
nlf0_evaluator, 690
nlf1_evaluator, 691
nlf2_evaluator, 691
SNLLOptimizer, 690
Dakota::SOLBase, 693
Dakota::Strategy, 696
∼Strategy, 700
free_iterator, 702
get_strategy, 702
init_iterator, 701
init_iterator_parallelism, 701
operator=, 700
pack_parameters_buffer, 700
pack_results_buffer, 701
run_iterator, 701
schedule_iterators, 702
self_schedule_iterators, 702
serve_iterators, 702
Strategy, 699, 700
unpack_parameters_buffer, 700
unpack_results_buffer, 701
Dakota::String, 703
begins, 704
contains, 704
data, 705
ends, 705
lower, 704
operator const char ∗, 704
upper, 704
Dakota::SurfpackApproximation, 706
Dakota::SurfpackApproximation
build, 708
checkForEqualityConstraints, 708
get_hessian, 708
surrogates_to_surf_data, 708
Dakota::SurrBasedGlobalMinimizer, 710
Dakota::SurrBasedLocalMinimizer, 712
Dakota::SurrBasedLocalMinimizer
approx_subprob_constraint_eval, 717
approx_subprob_objective_eval, 717
hard_convergence_check, 717
hom_constraint_eval, 718
hom_objective_eval, 718
minimize_surrogates, 716
tr_ratio_check, 717
update_penalty, 717
Dakota::SurrBasedMinimizer, 719
Dakota::SurrBasedMinimizer
augmented_lagrangian_merit, 722
constraint_violation, 723
lagrangian_merit, 722
objective, 723
objective_gradient, 723
penalty_merit, 722
print_results, 721
run, 721
update_augmented_lagrange_multipliers, 722
update_filter, 722
update_lagrange_multipliers, 722
Dakota::SurrogateModel, 724
Dakota::SurrogateModel
approxBuilds, 729
autoCorrection, 729
compute_correction, 728
force_rebuild, 728
Dakota::SysCallAnalysisCode, 730
Dakota::SysCallAnalysisCode
spawn_analysis, 731
spawn_evaluation, 730
spawn_input_filter, 731
spawn_output_filter, 731
Dakota::SysCallApplicInterface, 732

Dakota::SysCallApplicInterface
derived_synch, 733
derived_synch_nowait, 733
derived_synchronous_local_analysis, 733
Dakota::TANA3Approximation, 735
clear_current, 736
Dakota::TaylorApproximation, 737
Dakota::TrackerHTTP, 739
Dakota::Variables, 742
∼Variables, 752
build_views, 753
copy, 753
get_variables, 753
operator=, 753
Variables, 752, 753
Dakota::Verification, 755
print_results, 756
run, 756
dakota_response_to_colin_response
Dakota::COLINApplication, 219
dakota_stop
dll_api.C, 758
dll_api.h, 760
data
Dakota::String, 705
dataOrder
Dakota::Approximation, 198
DAUIVLbl
Dakota, 161
DAURVLbl
Dakota, 161
DDACEDesignCompExp
Dakota::DDACEDesignCompExp, 314
derivative_concurrency
Dakota::Model, 452
derived_asynch_compute_response
Dakota::DataFitSurrModel, 260
Dakota::HierarchSurrModel, 363
Dakota::NestedModel, 469
derived_compute_response
Dakota::DataFitSurrModel, 260
Dakota::HierarchSurrModel, 362
Dakota::NestedModel, 469
derived_init_communicators
Dakota::DataFitSurrModel, 262
Dakota::NestedModel, 469
derived_map_ac
Dakota::DirectApplicInterface, 322
derived_master_overload
Dakota::NestedModel, 469
derived_parse_inputs
Dakota::NIDRProblemDescDB, 475
derived_synch
Dakota::SysCallApplicInterface, 733
derived_synch_nowait
Dakota::SysCallApplicInterface, 733
derived_synchronize
Dakota::DataFitSurrModel, 260
Dakota::HierarchSurrModel, 363
derived_synchronize_nowait
Dakota::DataFitSurrModel, 260
Dakota::HierarchSurrModel, 363
derived_synchronous_local_analysis
Dakota::DirectApplicInterface, 322
Dakota::ForkApplicInterface, 338
Dakota::GridApplicInterface, 358
Dakota::SysCallApplicInterface, 733
derivVarsVector
Dakota::ActiveSet, 169
Description
Dakota::JEGAOptimizer::Evaluator, 400
DestroyAlgorithm
Dakota::JEGAOptimizer::Driver, 397
DF
Dakota::CONMINOptimizer, 239
dg_ds_eval
Dakota::NonDLocalReliability, 552
DiscSetLbl
Dakota, 161
div_index_map
Dakota::NestedModel, 470
dll_api.C, 757
dakota_stop, 758
dll_api.h, 759
dakota_stop, 760
dotFDSinfo
Dakota::DOTOptimizer, 326
dotInfo
Dakota::DOTOptimizer, 326
dotMethod
Dakota::DOTOptimizer, 327
Driver
Dakota::JEGAOptimizer::Driver, 396
drv_index_map
Dakota::NestedModel, 470
duplication_detect
Dakota::ApplicationInterface, 187

ends

Dakota::String, 705
enforce_input_rules
Dakota::FSUDesignCompExp, 343
Dakota::PSUADEDesignCompExp, 637
enroll
Dakota::GetLongOpt, 352
ErrorTable, 334
estimate_derivatives
Dakota::Model, 452
estimate_message_lengths
Dakota::Model, 451
estimate_order
Dakota::RichExtrapVerification, 660
evalInterfaceIds
Dakota::ParamResponsePair, 608
Evaluate
Dakota::JEGAOptimizer::Evaluator, 402
evaluate_parameter_sets
Dakota::Analyzer, 178
evaluation_available
Dakota::COLINApplication, 218
evaluation_id
Dakota::DataFitSurrModel, 263
Dakota::HierarchSurrModel, 363
Dakota::NestedModel, 469
Evaluator
Dakota::JEGAOptimizer::Evaluator, 399, 400
EvaluatorCreator
Dakota::JEGAOptimizer::EvaluatorCreator, 404
EXP_TOO_BIG
CtelRegexp, 253
extract_parameter_sets
Dakota::SequentialHybridStrategy, 666
ExtractAllData
Dakota::JEGAOptimizer::Driver, 396

fdGradStepSize
Dakota::Iterator, 387
fdHessByFnStepSize
Dakota::Iterator, 387
fdHessByGradStepSize
Dakota::Iterator, 387
FDstep1
Dakota::Model, 452
FDstep2
Dakota::Model, 452
FIELD_NAMES
Dakota, 95
finalize_run
Dakota::Iterator, 385
Dakota::LeastSq, 408
Dakota::Minimizer, 419
Dakota::NonD, 495
Dakota::Optimizer, 584
find_optimum
Dakota::APPSOptimizer, 209
Dakota::COLINOptimizer, 222
Dakota::JEGAOptimizer, 393
flush
Dakota, 92
Dakota::CommandShell, 228
force_rebuild
Dakota::SurrogateModel, 728
fork_application
Dakota::ForkApplicInterface, 338
fpinit_ASL
main.C, 766
free_iterator
Dakota::Strategy, 702
FSUDesignCompExp
Dakota::FSUDesignCompExp, 342
functionGradients
Dakota::ResponseRep, 657
functionSurfaces
Dakota::ApproximationInterface, 203

G1
Dakota::CONMINOptimizer, 238
G2
Dakota::CONMINOptimizer, 238
GaussProcApproximation
Dakota::GaussProcApproximation, 349
get_approx
Dakota::Approximation, 197, 198
get_confidence_intervals
Dakota::LeastSq, 409
get_constraints
Dakota::Constraints, 250, 251
get_db
Dakota::ProblemDescDB, 631
get_hessian
Dakota::SurfpackApproximation, 708
get_interface
Dakota::Interface, 374
get_iterator
Dakota::Iterator, 386
get_model
Dakota::Model, 452
get_parameter_sets
Dakota::NonDSampling, 571

get_strategy
Dakota::Strategy, 702
get_variables
Dakota::Variables, 753
GetBestMOSolutions
Dakota::JEGAOptimizer, 392
GetBestSolutions
Dakota::JEGAOptimizer, 392
GetBestSOSolutions
Dakota::JEGAOptimizer, 392
GetDescription
Dakota::JEGAOptimizer::Evaluator, 403
getdist
Dakota, 92
GetLongOpt
Dakota::GetLongOpt, 352
GetName
Dakota::JEGAOptimizer::Evaluator, 402
GetNumberLinearConstraints
Dakota::JEGAOptimizer::Evaluator, 402
GetNumberNonLinearConstraints
Dakota::JEGAOptimizer::Evaluator, 401
getRmax
Dakota, 93
GOOD
CtelRegexp, 253
GPmodel_apply
Dakota::GaussProcApproximation, 349

hard_convergence_check
Dakota::SurrBasedLocalMinimizer, 717
hom_constraint_eval
Dakota::SurrBasedLocalMinimizer, 718
hom_objective_eval
Dakota::SurrBasedLocalMinimizer, 718

IC
Dakota::CONMINOptimizer, 239
id_vars_exact_compare
Dakota, 94
increment_grid
Dakota::NonDCubature, 506
increment_parallel_configuration
Dakota::ParallelLibrary, 603
increment_reference
Dakota::NonDCubature, 506
INDEX_MATCH
CtelRegexp, 254
INDEX_RANGE
CtelRegexp, 253
init_communicators
Dakota::Model, 451
Dakota::ParallelLibrary, 604
init_iterator
Dakota::Strategy, 701
init_iterator_parallelism
Dakota::Strategy, 701
init_serial
Dakota::ApplicationInterface, 186
Dakota::Model, 451
initial_points
Dakota::JEGAOptimizer, 394
initial_taylor_series
Dakota::NonDLocalReliability, 551
initialize
Dakota::NonDAdaptImpSampling, 500
Dakota::RecastModel, 646
initialize_class_data
Dakota::NonDLocalReliability, 551
initialize_final_statistics
Dakota::NonD, 495
initialize_graphics
Dakota::Iterator, 385
initialize_level_data
Dakota::NonDLocalReliability, 551
initialize_mpp_search_data
Dakota::NonDLocalReliability, 551
initialize_random_variable_parameters
Dakota::NonD, 496
initialize_random_variable_types
Dakota::NonD, 496
initialize_random_variables
Dakota::NonD, 495
initialize_run
Dakota::Iterator, 384
Dakota::LeastSq, 408
Dakota::Minimizer, 419
Dakota::NonD, 495
Dakota::Optimizer, 583
initialize_scaling
Dakota::Minimizer, 419
initialize_variables_and_constraints
Dakota::APPSOptimizer, 209
instantiate_flag
Dakota::CommandLineHandler, 226
INT_ERROR
CtelRegexp, 254
intCntlParmArray
Dakota::DOTOptimizer, 327

Interface
Dakota::Interface, 373, 374
interface
Dakota::Model, 450
interface_id
Dakota::Model, 450
ISC
Dakota::CONMINOptimizer, 239
isReadyForWork
Dakota::APPSEvalMgr, 206
Iterator
Dakota::Iterator, 383, 384

JEGAOptimizer
Dakota::JEGAOptimizer, 390
JEGAOptimizer.C, 761
JEGAOptimizer.H, 762

kw_1
Dakota, 97, 149
kw_10
Dakota, 99
kw_100
Dakota, 120
kw_101
Dakota, 120, 155
kw_102
Dakota, 120, 155
kw_103
Dakota, 120
kw_104
Dakota, 121, 155
kw_105
Dakota, 121
kw_106
Dakota, 121
kw_107
Dakota, 122
kw_108
Dakota, 122
kw_109
Dakota, 122
kw_11
Dakota, 99
kw_110
Dakota, 122, 156
kw_111
Dakota, 122
kw_112
Dakota, 123
kw_113
Dakota, 123, 156
kw_114
Dakota, 123
kw_115
Dakota, 123
kw_116
Dakota, 123
kw_117
Dakota, 124
kw_118
Dakota, 124
kw_119
Dakota, 124
kw_12
Dakota, 99
kw_120
Dakota, 125
kw_121
Dakota, 125
kw_122
Dakota, 125
kw_123
Dakota, 126
kw_124
Dakota, 126
kw_125
Dakota, 126
kw_126
Dakota, 126
kw_127
Dakota, 127
kw_128
Dakota, 127
kw_129
Dakota, 127
kw_13
Dakota, 100
kw_130
Dakota, 127
kw_131
Dakota, 127
kw_132
Dakota, 128
kw_133
Dakota, 128
kw_134
Dakota, 128
kw_135

Dakota, 129
kw_136
Dakota, 129
kw_137
Dakota, 129, 156
kw_138
Dakota, 129
kw_139
Dakota, 130
kw_14
Dakota, 100
kw_140
Dakota, 130
kw_142
Dakota, 130
kw_143
Dakota, 130
kw_144
Dakota, 131
kw_145
Dakota, 131
kw_146
Dakota, 131
kw_147
Dakota, 131
kw_148
Dakota, 131
kw_149
Dakota, 132, 156
kw_15
Dakota, 100
kw_150
Dakota, 132
kw_151
Dakota, 132
kw_152
Dakota, 132
kw_153
Dakota, 132
kw_154
Dakota, 133
kw_155
Dakota, 133
kw_156
Dakota, 133
kw_157
Dakota, 133
kw_158
Dakota, 133
kw_159
Dakota, 134
kw_16
Dakota, 100
kw_160
Dakota, 134
kw_161
Dakota, 134
kw_162
Dakota, 135
kw_163
Dakota, 135
kw_164
Dakota, 135
kw_165
Dakota, 135
kw_166
Dakota, 135
kw_167
Dakota, 136
kw_168
Dakota, 136
kw_169
Dakota, 136
kw_17
Dakota, 101
kw_170
Dakota, 136
kw_171
Dakota, 137
kw_172
Dakota, 137
kw_173
Dakota, 137
kw_174
Dakota, 137
kw_175
Dakota, 137
kw_176
Dakota, 138, 156
kw_177
Dakota, 138
kw_178
Dakota, 138
kw_179
Dakota, 138
kw_18
Dakota, 101
kw_180

Dakota, 139
kw_181
Dakota, 139
kw_182
Dakota, 139, 157
kw_183
Dakota, 139
kw_184
Dakota, 140
kw_185
Dakota, 140
kw_186
Dakota, 140
kw_187
Dakota, 140
kw_188
Dakota, 140
kw_189
Dakota, 141
kw_19
Dakota, 101
kw_190
Dakota, 141
kw_191
Dakota, 141
kw_192
Dakota, 141
kw_193
Dakota, 142
kw_194
Dakota, 142
kw_195
Dakota, 142
kw_196
Dakota, 142
kw_197
Dakota, 143
kw_198
Dakota, 143
kw_199
Dakota, 143
kw_2
Dakota, 97, 150
kw_20
Dakota, 101, 152
kw_200
Dakota, 143
kw_201
Dakota, 144
kw_202
Dakota, 144
kw_203
Dakota, 144
kw_204
Dakota, 144
kw_205
Dakota, 145
kw_206
Dakota, 145
kw_207
Dakota, 145
kw_208
Dakota, 145
kw_209
Dakota, 146, 157
kw_21
Dakota, 102, 152
kw_210
Dakota, 146
kw_211
Dakota, 146
kw_212
Dakota, 147
kw_213
Dakota, 147
kw_214
Dakota, 147
kw_215
Dakota, 147
kw_216
Dakota, 148
kw_217
Dakota, 148
kw_218
Dakota, 148
kw_219
Dakota, 148
kw_22
Dakota, 102, 152
kw_220
Dakota, 149, 157
kw_221
Dakota, 149
kw_223
Dakota, 149
kw_224
Dakota, 157
kw_225

Dakota, 158
kw_226
Dakota, 158
kw_227
Dakota, 158
kw_228
Dakota, 158
kw_229
Dakota, 159
kw_23
Dakota, 102
kw_230
Dakota, 159
kw_231
Dakota, 159
kw_232
Dakota, 159
kw_233
Dakota, 160
kw_234
Dakota, 160
kw_236
Dakota, 160
kw_24
Dakota, 102
kw_25
Dakota, 102
kw_26
Dakota, 103, 152
kw_27
Dakota, 103, 153
kw_28
Dakota, 103
kw_29
Dakota, 103
kw_3
Dakota, 97, 150
kw_30
Dakota, 104
kw_31
Dakota, 104
kw_32
Dakota, 105
kw_33
Dakota, 105
kw_34
Dakota, 105, 153
kw_35
Dakota, 105
kw_36
Dakota, 106
kw_37
Dakota, 106, 153
kw_38
Dakota, 106
kw_39
Dakota, 106
kw_4
Dakota, 97, 150
kw_40
Dakota, 107
kw_41
Dakota, 107
kw_42
Dakota, 107
kw_43
Dakota, 107
kw_44
Dakota, 108, 153
kw_45
Dakota, 108
kw_46
Dakota, 108
kw_47
Dakota, 108
kw_48
Dakota, 108, 153
kw_49
Dakota, 109
kw_5
Dakota, 97, 150
kw_50
Dakota, 109
kw_51
Dakota, 109
kw_52
Dakota, 109
kw_53
Dakota, 110
kw_54
Dakota, 110
kw_55
Dakota, 110
kw_56
Dakota, 110, 154
kw_57
Dakota, 110
kw_58

Dakota, 111
kw_59
Dakota, 111
kw_6
Dakota, 98, 151
kw_60
Dakota, 111
kw_61
Dakota, 111
kw_62
Dakota, 112
kw_63
Dakota, 112, 154
kw_64
Dakota, 112
kw_65
Dakota, 112
kw_66
Dakota, 112, 154
kw_67
Dakota, 113, 154
kw_68
Dakota, 113
kw_69
Dakota, 113
kw_7
Dakota, 98, 151
kw_70
Dakota, 113
kw_71
Dakota, 113
kw_72
Dakota, 114
kw_73
Dakota, 114
kw_74
Dakota, 114
kw_75
Dakota, 114
kw_76
Dakota, 115
kw_77
Dakota, 115
kw_78
Dakota, 115
kw_79
Dakota, 115
kw_8
Dakota, 98, 151
kw_80
Dakota, 115, 154
kw_81
Dakota, 116
kw_82
Dakota, 116
kw_83
Dakota, 116
kw_84
Dakota, 116, 155
kw_85
Dakota, 116
kw_86
Dakota, 117
kw_87
Dakota, 117
kw_88
Dakota, 117
kw_89
Dakota, 118
kw_9
Dakota, 99, 151
kw_90
Dakota, 118
kw_91
Dakota, 118
kw_92
Dakota, 118
kw_93
Dakota, 118
kw_94
Dakota, 119, 155
kw_95
Dakota, 119
kw_96
Dakota, 119
kw_97
Dakota, 119
kw_98
Dakota, 119
kw_99
Dakota, 120

lagrangian_merit
Dakota::SurrBasedMinimizer, 722
LeastSq
Dakota::LeastSq, 408
library_mode.C, 763
main, 764
model_interface_plugins, 764

my_callback_function, 764
run_dakota_mixed, 763
run_dakota_parse, 763
library_split.C, 765
lin_coeffs_modify_n2s
Dakota::Minimizer, 420
LoadAlgorithmConfig
Dakota::JEGAOptimizer, 391
LoadDakotaResponses
Dakota::JEGAOptimizer, 391
LoadProblemConfig
Dakota::JEGAOptimizer, 391
LoadTheConstraints
Dakota::JEGAOptimizer, 392
LoadTheDesignVariables
Dakota::JEGAOptimizer, 391
LoadTheObjectiveFunctions
Dakota::JEGAOptimizer, 392
LoadTheParameterDatabase
Dakota::JEGAOptimizer, 391
local_eval_concurrency
Dakota::Model, 450
local_eval_synchronization
Dakota::Model, 450
lookup_by_val
Dakota, 94
lower
Dakota::String, 704

main
library_mode.C, 764
main.C, 766
restart_util.C, 767
main.C, 766
fpinit_ASL, 766
main, 766
manage_asv
Dakota::Model, 453
manage_inputs
Dakota::ProblemDescDB, 631
manage_linear_constraints
Dakota::Constraints, 250
manage_outputs_restart
Dakota::ParallelLibrary, 603
MandatoryValue
Dakota::GetLongOpt, 352
map
Dakota::ApplicationInterface, 186
map_domain
Dakota::COLINApplication, 219
MergedConstraints
Dakota::MergedConstraints, 411
MergedVariables
Dakota::MergedVariables, 413
mindist
Dakota, 92
mindistindx
Dakota, 92
minimize_surrogates
Dakota::SurrBasedLocalMinimizer, 716
Minimizer
Dakota::Minimizer, 418
MixedConstraints
Dakota::MixedConstraints, 423
MixedVariables
Dakota::MixedVariables, 425
Model
Dakota::Model, 448
model_interface_plugins
library_mode.C, 764
modify_n2s
Dakota::Minimizer, 420
modify_s2n
Dakota::Minimizer, 420
MS1
Dakota::CONMINOptimizer, 238
multi_objective_retrieve
Dakota::Optimizer, 584
my_callback_function
library_mode.C, 764

N1
Dakota::CONMINOptimizer, 237
N2
Dakota::CONMINOptimizer, 237
N3
Dakota::CONMINOptimizer, 237
N4
Dakota::CONMINOptimizer, 237
N5
Dakota::CONMINOptimizer, 237
Name
Dakota::JEGAOptimizer::Evaluator, 400
NCSUOptimizer
Dakota::NCSUOptimizer, 463
need_resp_trans_byvars
Dakota::Minimizer, 419
new_dataset
Dakota::Graphics, 356
nlf0_evaluator

Dakota::SNLLOptimizer, 690
nlf1_evaluator
Dakota::SNLLOptimizer, 691
nlf2_evaluator
Dakota::SNLLOptimizer, 691
nlf2_evaluator_gn
Dakota::SNLLLeastSq, 684
NLSSOLLeastSq
Dakota::NLSSOLLeastSq, 487
NonDAdaptImpSampling
Dakota::NonDAdaptImpSampling, 499
NonDBayesCalibration
Dakota::NonDBayesCalibration, 502
NonDCalibration
Dakota::NonDCalibration, 503
NonDCubature
Dakota::NonDCubature, 505
NonDGPMSABayesCalibration
Dakota::NonDGPMSABayesCalibration, 524
NonDIncremLHSSampling
Dakota::NonDIncremLHSSampling, 527
NonDIntegration
Dakota::NonDIntegration, 529
NonDLHSSampling
Dakota::NonDLHSSampling, 538
NonDQuadrature
Dakota::NonDQuadrature, 560
NonDQUESOBayesCalibration
Dakota::NonDQUESOBayesCalibration, 562
NonDSampling
Dakota::NonDSampling, 570, 571
NonDSparseGrid
Dakota::NonDSparseGrid, 575
NPSOLOptimizer
Dakota::NPSOLOptimizer, 579
num_samples
Dakota::DDACEDesignCompExp, 315
Dakota::FSUDesignCompExp, 343
Dakota::Iterator, 385
Dakota::NonDSampling, 571
Dakota::PSUADEDesignCompExp, 637
NUMBER_OF_FIELDS
Dakota, 96

objective
Dakota::SurrBasedMinimizer, 723
objective_gradient
Dakota::SurrBasedMinimizer, 723
operator const char *
Dakota::String, 704
operator<<
Dakota::BoStream, 216
operator=
Dakota::Approximation, 197
Dakota::Constraints, 250
Dakota::Interface, 374
Dakota::Iterator, 384
Dakota::Model, 449
Dakota::ProblemDescDB, 631
Dakota::Strategy, 700
Dakota::Variables, 753
operator>>
Dakota::BiStream, 213
optimizationType
Dakota::CONMINOptimizer, 236
Dakota::DOTOptimizer, 327
Optimizer
Dakota::Optimizer, 583
OptionalValue
Dakota::GetLongOpt, 351
OptType
Dakota::GetLongOpt, 351
OUT_OF_MEM
CtelRegexp, 253

pack_parameters_buffer
Dakota::ConcurrentStrategy, 230
Dakota::SequentialHybridStrategy, 665
Dakota::Strategy, 700
pack_results_buffer
Dakota::ConcurrentStrategy, 231
Dakota::SequentialHybridStrategy, 665
Dakota::Strategy, 701
ParallelLibrary
Dakota::ParallelLibrary, 602
ParamResponsePair
Dakota::ParamResponsePair, 607
parse
Dakota::GetLongOpt, 352
parse_inputs
Dakota::ProblemDescDB, 631
penalty_merit
Dakota::SurrBasedMinimizer, 722
perform_analysis
Dakota, 93
perform_evaluation_impl
Dakota::COLINApplication, 219
PerformIterations
Dakota::JEGAOptimizer::Driver, 397
PMA_constraint_eval

Dakota::NonDReliability, 566
PMA_objective_eval
Dakota::NonDReliability, 566
pop_approximation
Dakota::ApproximationInterface, 203
post_process
Dakota::ProblemDescDB, 631
post_run
Dakota::COLINOptimizer, 222
Dakota::DDACEDesignCompExp, 315
Dakota::FSUDesignCompExp, 342
Dakota::Iterator, 385
Dakota::LeastSq, 408
Dakota::Optimizer, 584
Dakota::ParamStudy, 612
Dakota::PSUADEDesignCompExp, 637
pre_run
Dakota::DDACEDesignCompExp, 314
Dakota::FSUDesignCompExp, 342
Dakota::Iterator, 384
Dakota::ParamStudy, 612
Dakota::PSUADEDesignCompExp, 637
primary_resp_recast
Dakota::LeastSq, 409
Dakota::Optimizer, 584
print_restart
Dakota, 94
print_restart_tabular
Dakota, 94
print_results
Dakota::Analyzer, 178
Dakota::Iterator, 385
Dakota::LeastSq, 409
Dakota::Optimizer, 584
Dakota::PStudyDACE, 633
Dakota::RichExtrapVerification, 659
Dakota::SurrBasedMinimizer, 721
Dakota::Verification, 756
print_sobol_indices
Dakota::Analyzer, 179
printControl
Dakota::CONMINOptimizer, 236
Dakota::DOTOptimizer, 327
probability
Dakota::NonDLocalReliability, 552
ProblemDescDB
Dakota::ProblemDescDB, 630
PSUADEDesignCompExp
Dakota::PSUADEDesignCompExp, 637

python_convert_int
Dakota::DirectApplicInterface, 322

quantify_uncertainty
Dakota::NonDGPMSABayesCalibration, 525
Dakota::NonDIncremLHSSampling, 527
Dakota::NonDLHSSampling, 539
Dakota::NonDQUESOBayesCalibration, 562

rawResponseMap
Dakota::Interface, 375
read
Dakota::ParamResponsePair, 607
Dakota::ResponseRep, 655, 656
read_annotated
Dakota::ResponseRep, 655
read_neutral
Dakota, 95
read_observed_data
Dakota::LeastSq, 409
read_tabular
Dakota::MergedVariables, 413
Dakota::MixedVariables, 425
Dakota::ResponseRep, 655
realCntlParmArray
Dakota::DOTOptimizer, 327
rebuild_approximation
Dakota::ApproximationInterface, 202
RecastModel
Dakota::RecastModel, 645
RecordResponses
Dakota::JEGAOptimizer::Evaluator, 401
recv
Dakota::APPSEvalMgr, 206
reliability
Dakota::NonDLocalReliability, 552
repair_restart
Dakota, 95
requestVector
Dakota::ActiveSet, 169
reset
Dakota::ResponseRep, 657
reset_inactive
Dakota::ResponseRep, 657
reshape
Dakota::Constraints, 250
Dakota::MergedConstraints, 411
Dakota::MixedConstraints, 423
Dakota::ResponseRep, 657
resize_response_results_array

Dakota::JEGAOptimizer, 393
resize_variables_results_array
Dakota::JEGAOptimizer, 393
resolve_inputs
Dakota::ParallelLibrary, 604
resolve_samples_symbols
Dakota::DDACEDesignCompExp, 315
Response
Dakota::Response, 651
response_mapping
Dakota::NestedModel, 470
response_modify_n2s
Dakota::Minimizer, 420
response_modify_s2n
Dakota::Minimizer, 420
ResponseRep
Dakota::ResponseRep, 654
restart_util.C, 767
main, 767
restore_approximation
Dakota::ApproximationInterface, 203
restore_available
Dakota::ApproximationInterface, 203
retrieve
Dakota::GetLongOpt, 352
returns_multiple_points
Dakota::JEGAOptimizer, 394
RIA_constraint_eval
Dakota::NonDReliability, 565
RIA_objective_eval
Dakota::NonDReliability, 565
RStatus
CtelRegexp, 253
run
Dakota::Iterator, 384
Dakota::LeastSq, 408
Dakota::NonD, 495
Dakota::Optimizer, 583
Dakota::PStudyDACE, 633
Dakota::SurrBasedMinimizer, 721
Dakota::Verification, 756
run_dakota_data
Dakota, 93
Dakota::DataInterface, 266
Dakota::DataMethod, 268
Dakota::DataResponses, 289
Dakota::DataVariables, 300
run_dakota_mixed
library_mode.C, 763
run_dakota_parse
library_mode.C, 763
run_iterator
Dakota::Iterator, 386
Dakota::Strategy, 701
run_sequential
Dakota::SequentialHybridStrategy, 666
run_sequential_adaptive
Dakota::SequentialHybridStrategy, 666

S
Dakota::CONMINOptimizer, 238
sampling_reset
Dakota::NonDCubature, 506
Dakota::NonDQuadrature, 560
Dakota::NonDSampling, 571
Dakota::NonDSparseGrid, 575
SCAL
Dakota::CONMINOptimizer, 238
schedule_iterators
Dakota::Strategy, 702
secondary_resp_recast
Dakota::Minimizer, 419
self_schedule_analyses
Dakota::ApplicationInterface, 187
self_schedule_evaluations
Dakota::ApplicationInterface, 188
self_schedule_iterators
Dakota::Strategy, 702
SeparateVariables
Dakota::JEGAOptimizer::Evaluator, 401
serve_analyses_asynch
Dakota::ForkApplicInterface, 339
serve_analyses_synch
Dakota::ApplicationInterface, 187
serve_evaluations
Dakota::ApplicationInterface, 187
serve_evaluations_asynch
Dakota::ApplicationInterface, 190
serve_evaluations_peer
Dakota::ApplicationInterface, 190
serve_evaluations_synch
Dakota::ApplicationInterface, 189
serve_iterators
Dakota::Strategy, 702
set_apps_parameters
Dakota::APPSOptimizer, 209
set_compare
Dakota, 94
set_problem

Dakota::COLINApplication, 218
set_u_to_x_mapping
Dakota::NonD, 496
SharedVariablesDataRep
Dakota::SharedVariablesDataRep, 673
SIM, 165
SIM::ParallelDirectApplicInterface, 588
SIM::SerialDirectApplicInterface, 667
slmap
Dakota, 96
SNLLOptimizer
Dakota::SNLLOptimizer, 690
spawn_analysis
Dakota::SysCallAnalysisCode, 731
spawn_evaluation
Dakota::SysCallAnalysisCode, 730
spawn_evaluation_impl
Dakota::COLINApplication, 218
spawn_input_filter
Dakota::SysCallAnalysisCode, 731
spawn_output_filter
Dakota::SysCallAnalysisCode, 731
specify_outputs_restart
Dakota::ParallelLibrary, 603
STARPLUS_EMPTY
CtelRegexp, 253
STARPLUS_NESTED
CtelRegexp, 253
STARPLUS_NOTHING
CtelRegexp, 254
start_dakota_heartbeat
Dakota, 92
start_grid_computing
Dakota, 93
static_schedule_evaluations
Dakota::ApplicationInterface, 188
stop_evaluation_servers
Dakota::ApplicationInterface, 187
stop_grid_computing
Dakota, 93
Strategy
Dakota::Strategy, 699, 700
submit
Dakota::APPSEvalMgr, 206
subModel
Dakota::NestedModel, 471
subordinate_iterator
Dakota::Model, 449
subordinate_model
Dakota::Model, 449
subordinate_models
Dakota::Model, 451
surrogate_model
Dakota::Model, 449
surrogates_to_surf_data
Dakota::SurfpackApproximation, 708
synch
Dakota::ApplicationInterface, 186
synch_nowait
Dakota::ApplicationInterface, 186
synchronize_derivatives
Dakota::Model, 452
synchronous_local_analyses
Dakota::ForkApplicInterface, 339
synchronous_local_evaluations
Dakota::ApplicationInterface, 189

ToDoubleMatrix
Dakota::JEGAOptimizer, 393
TOO_MANY_PAR
CtelRegexp, 253
tr_ratio_check
Dakota::SurrBasedLocalMinimizer, 717
TRAILING
CtelRegexp, 254
truth_model
Dakota::Model, 449

UNMATCH_PAR
CtelRegexp, 253
unpack_parameters_buffer
Dakota::ConcurrentStrategy, 231
Dakota::SequentialHybridStrategy, 665
Dakota::Strategy, 700
unpack_results_buffer
Dakota::ConcurrentStrategy, 231
Dakota::SequentialHybridStrategy, 665
Dakota::Strategy, 701
update
Dakota::ResponseRep, 656
update_actual_model
Dakota::DataFitSurrModel, 263
update_approximation
Dakota::ApproximationInterface, 201, 202
Dakota::DataFitSurrModel, 261
update_augmented_lagrange_multipliers
Dakota::SurrBasedMinimizer, 722
update_filter
Dakota::SurrBasedMinimizer, 722

update_from_actual_model
Dakota::DataFitSurrModel, 263
update_from_sub_model
Dakota::RecastModel, 646
update_from_subordinate_model
Dakota::Model, 450
update_lagrange_multipliers
Dakota::SurrBasedMinimizer, 722
update_level_data
Dakota::NonDLocalReliability, 552
update_mpp_search_data
Dakota::NonDLocalReliability, 551
update_partial
Dakota::ResponseRep, 656
update_penalty
Dakota::SurrBasedLocalMinimizer, 717
update_pma_reliability_level
Dakota::NonDLocalReliability, 552
update_quasi_hessians
Dakota::Model, 453
update_response
Dakota::Model, 453
upper
Dakota::String, 704
usage
Dakota::GetLongOpt, 353
useDerivsFlag
Dakota::NonDExpansion, 511

Valueless
Dakota::GetLongOpt, 351
var_mp_bgen
Dakota, 162
var_mp_bgen_audi
Dakota, 163
var_mp_bgen_audr
Dakota, 163
var_mp_bgen_dis
Dakota, 163
var_mp_bgen_eu
Dakota, 163
var_mp_bndchk
Dakota, 164
var_mp_ibndchk
Dakota, 164
Variables
Dakota::Variables, 752, 753
variables_recast
Dakota::Minimizer, 419
variance_based_decomp
Dakota::Analyzer, 179
vars_u_to_x_mapping
Dakota::NonD, 496
Vlch
Dakota, 162
VLS
Dakota, 162
volumetric_quality
Dakota::PStudyDACE, 633

weighted_sum
Dakota::Optimizer, 584
write
Dakota::ParamResponsePair, 607
Dakota::ResponseRep, 655, 656
write_annotated
Dakota::ResponseRep, 655
write_tabular
Dakota::ResponseRep, 655